


22 kW Troubleshoot



PRO-NET
PROTON NEW ENERGY TECHNOLOGY SDN BHD

Pre-condition Requirement for 22kW

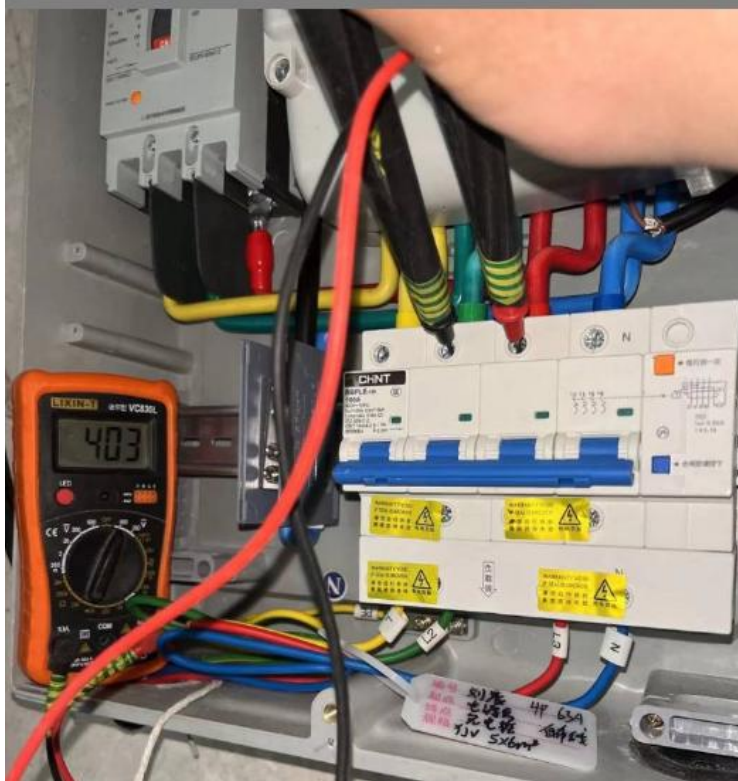

L- L voltage: Three-phase $400V \pm 15\%$
Single-phase $230V \pm 15\%$




The N-PE voltage $< 4V$



Grounding resistance is $< 4\Omega$

Remarks: Please take picture of all the readings

Issue: EV Connector no output

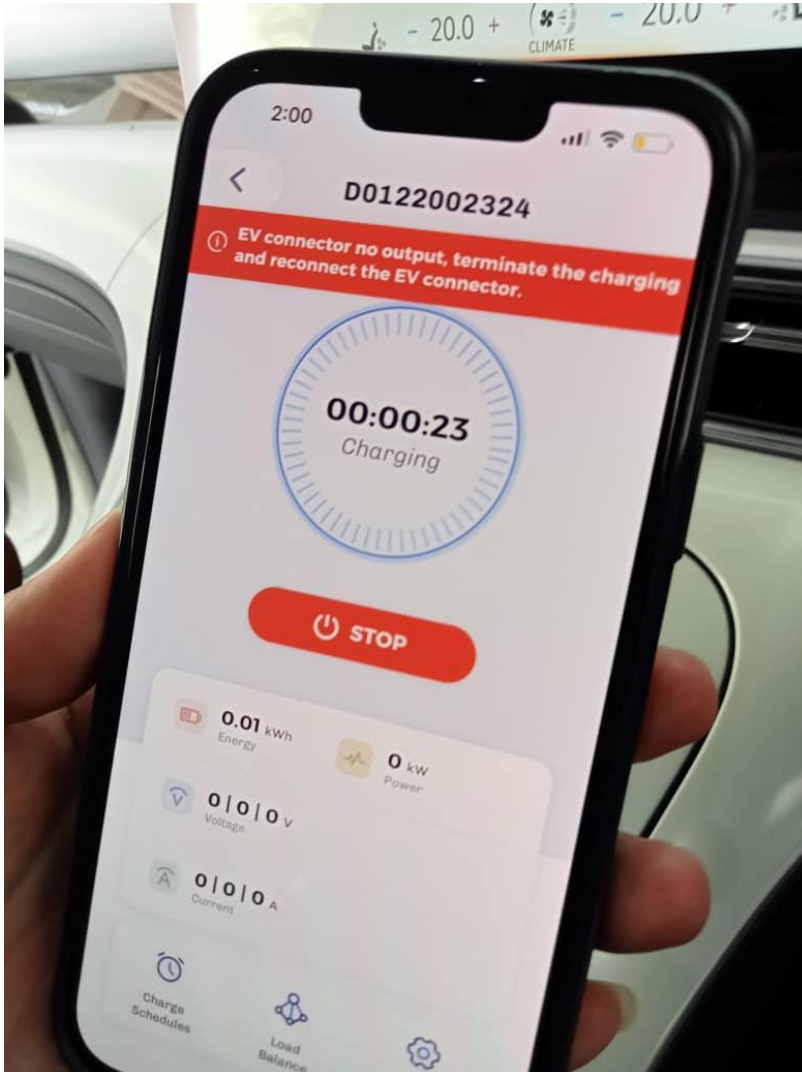


1. Check the voltage at isolator and termination of the charger
2. Open e.BOX app > Device Setting > Connection Mode. Please make sure to choose correct connection based on installation either 3-phase or 1-single phase connection.
3. Do not turn on the auto function at load balance in e.BOX app.

Remarks: refer 22kW Charger Setup for details

If issue still persist, please provide the followings:

- Voltage reading at isolator and termination of charger
- Screenshot / screen record the setting

Issue: Switching Three-phase to Single-phase

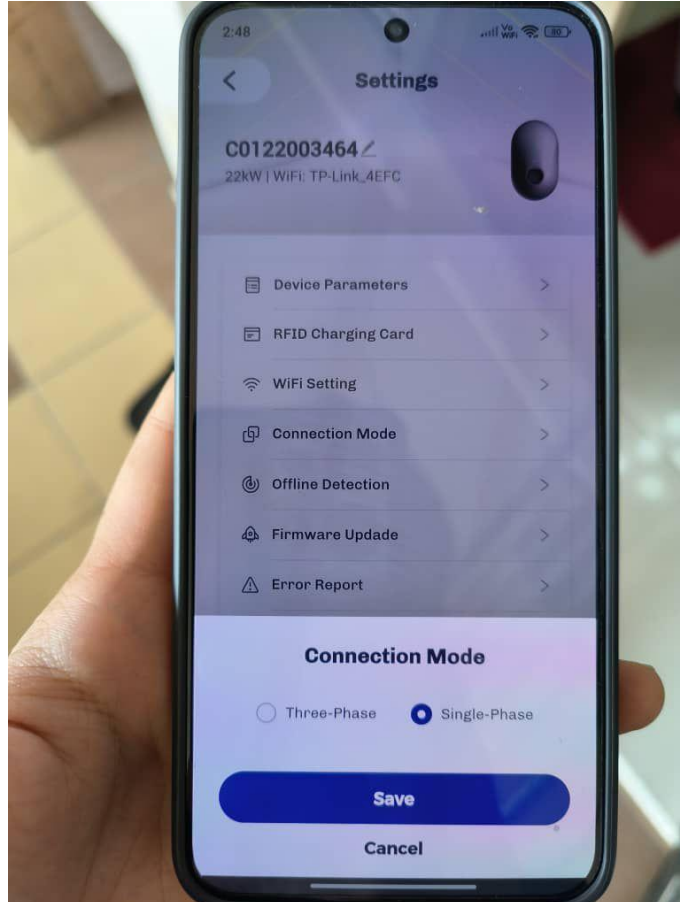


If customer's house only have single phase supply the followings method is required:

1. **Important:** The wallbox need to be connected to the e.BOX app first
2. Switch to single-phase mode via the APP. (refer picture)
3. After the settings are completed, power off the wallbox for at least 1 minute and power on again

If issue still persist, please provide the followings:

- Screenshot / screen record the whole process

Issue: Charging Interrupted

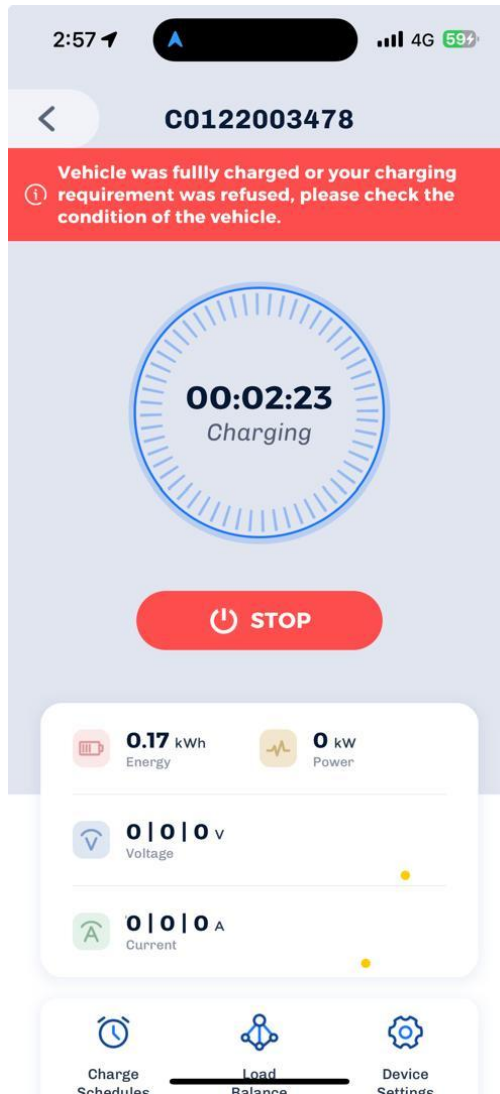

1. Please make sure scheduled charging is turn off at e.BOX app and vehicle
 - I. e.BOX app > Charge scheduled
 - II. Vehicle DHU > Energy > Turn off scheduled charging

If issue still persist, please provide the followings:

- Screenshot / screen record the e.BOX app
- Take picture of Vehicle DHU under Energy section

Thank you



PRO-NET
PROTON NEW ENERGY TECHNOLOGY SDN BHD