

Predefined Time Prescribed Performance Backstepping Control for Robotic Manipulators with Input Saturation

Shuli Liu^{1,2}, Yi Liu^{3*}, Jingang Liu^{3*}, Yin Yang^{1,2*}

¹School of Mathematics and Computational Science, Xiangtan University, Street, City, 411105, China.

²National Center for Applied Mathematics in Hunan, Street, City, 411105, China.

³School of Mechanical Engineering and Mechanics, Xiangtan University, Street, City, 411105, China.

*Corresponding author(s). E-mail(s): liuyi_hust@163.com; wellbuild@126.com; yangyinxu@xtu.edu.cn;
Contributing authors: shunnee@163.com;

摘要

For robotic manipulators trajectory tracking with unknown dynamics, bounded disturbances, and input saturation, this work proposes an adaptive backstepping control method that combines predefined time convergence with global predefined performance constraints. A channel-wise predefined-time error transformation merges a polynomial performance function with error scaling. It removes initial-state singularities and nonsmooth mappings in conventional PPC and enforces strict, smooth, global bounds within a user-set time, even from unknown initial states. We also design a unified saturation compensator that cancels residuals from command filtering and actuator saturation, curbs the backstepping complexity explosion, and reduces online computation. A first-order sliding-mode disturbance observer and an RBFNN estimator run online to handle bounded disturbances and unmodeled dynamics. With predefined-time stability theory and an adaptive dynamic barrier Lyapunov function, we prove closed-loop boundedness and on-time convergence. Simulations and experiments show faster response, better steady-state accuracy, and stronger robustness than existing methods.

Keywords: Prescribed performance control, predefined-time stability, adaptive dynamic barrier Lyapunov function, backstepping control, input saturation, robotic manipulators' trajectory tracking.

1 Introduction

2 Problem statement and preliminaries

2.1 System description

This work considers an uncertain nonlinear n-DOF robot manipulators system. Its dynamics are described as [1, 2]:

$$M(q)\ddot{q} + C(q, \dot{q})\dot{q} + G(q) + \Delta(q, \dot{q}, t) = u + d(t), \quad (1)$$

where $q, \dot{q}, \ddot{q} \in \mathbb{R}^n$ are the joint state vectors, $M(q) \in \mathbb{R}^{n \times n}$ is the inertia matrix, $C(q, \dot{q}) \in \mathbb{R}^{n \times n}$ represents the centrifugal effects, $G(q) \in \mathbb{R}^n$ represents the gravitational force, $u \in \mathbb{R}^n$ is the control joint input, $\Delta(q, \dot{q}, t) \in \mathbb{R}^n$ is the uncertainty and unmodeled dynamics, $d(t) \in \mathbb{R}^n$ is an external disturbance, n is the number of DOF of the manipulators system.

For controller design, define the state $x = [x_1, x_2]^\top = [q, \dot{q}]^\top \in \mathbb{R}^{2n}$. The system eq. (1) can be written in the standard state space form:

$$\begin{cases} \dot{x}_1 = x_2, \\ \dot{x}_2 = f(x) + g(q)u + \omega(x, t), \end{cases} \quad (2)$$

where $f(x) = -M^{-1}(q)(C(q, \dot{q})x_2 + G(q))$, $g(q) = M^{-1}(q)$, $\omega(x, t) = -M^{-1}(q)(\Delta(q, \dot{q}, t) - d(t))$, and $x_1 = [x_{1,1}, x_{1,2}, \dots, x_{1,n}]^\top$, $x_2 = [x_{2,1}, x_{2,2}, \dots, x_{2,n}]^\top$, u is the saturation of control input u' . Define the saturation error as

$$\Delta u_i = u'_i - u_i = \begin{cases} u'_i - u_{\max}, & u'_i \geq u_{\max}, \\ 0, & u_{\min} < u'_i < u_{\max}, \\ u'_i - u_{\min}, & u'_i \leq u_{\min}, \end{cases} \quad i = 1, 2, \dots, n, \quad (3)$$

where $u_{\max}, u_{\min}$ are the upper and lower saturation bounds of control input, respectively.

The controller design and stability analysis are conducted under the following physically justified assumptions.

Assumption 1 [3] $M(q)$ is symmetric positive definite for all q . There exist constants $m_1, m_2 > 0$ such that $m_1 I \leq M(q) \leq m_2 I$, $\forall q \in \mathbb{R}^n$. Moreover, the standard structural property holds: $\dot{M}(q) - 2C(q, \dot{q})$ is skew-symmetric.

Assumption 2 The unmodeled dynamics are bounded: there exists $\bar{\Delta} > 0$ such that $\|\Delta(q, \dot{q}, t)\| \leq \bar{\Delta}$, $\forall t \geq 0$. The disturbance and its derivative are bounded: there exist $\bar{d}, \bar{\dot{d}} > 0$ such that $\|d(t)\| \leq \bar{d}$ and $\|\dot{d}(t)\| \leq \bar{\dot{d}}$, $\forall t \geq 0$. The desired trajectory $q_d(t)$ is twice continuously differentiable, and there exist $\bar{q}_d, \bar{\dot{q}}_d, \bar{\ddot{q}}_d > 0$ such that $\|q_d(t)\| \leq \bar{q}_d$, $\|\dot{q}_d(t)\| \leq \bar{\dot{q}}_d$, $\|\ddot{q}_d(t)\| \leq \bar{\ddot{q}}_d$, $\forall t \geq 0$.

2.2 Preliminary

Lemma 1 [4] Consider the system $\dot{x}(t) = f(x(t))$, $x(0) = x_0$, where $x \in \mathbb{R}^n$ is the system's state, and $x(0) = x_0$ is the initial state. $f(\cdot)$ is continuous and satisfies $f(0) = 0$. Let $V : \mathbb{R}^n \rightarrow \mathbb{R}_+$ be continuously differentiable, positive definite, and radially unbounded, with $V(0) = 0$ and $V(x) > 0$ for all $x \neq 0$. For given design parameters $0 < \eta < 1$, $T_p > 0$, and $0 < \varsigma < \infty$, suppose the closed-loop system satisfies

$$\dot{V}(x) \leq -\frac{\pi}{\eta T_p} \left(V(x)^{1-\eta/2} + V(x)^{1+\eta/2} \right) + \varsigma, \quad (4)$$

Then the origin is predefined-time stable with convergence time bounded by T_p . Moreover,

$$\left\{ \lim_{t \rightarrow T_p} x | V \leq \min \left\{ \left(\frac{2\eta T_p \varsigma}{\pi} \right)^{\frac{1}{1-\eta/2}}, \left(\frac{2\eta T_p \varsigma}{\pi} \right)^{\frac{1}{1+\eta/2}} \right\} \right\}, \quad (5)$$

In particular, if $\varsigma = 0$ then $V(T_p) = 0$.

Definition 1 考虑系统 $\dot{x} = f(x, u)$ 。若存在给定常数 $T > 0$ 、 $\eta \in (0, 1)$ 以及类- $\mathcal{K}$ 函数 $\gamma(\cdot)$ ，使得对任意本质有界输入 $u \in L_\infty$ ，

$$\|x(T)\| \leq \gamma(\|u\|_\infty),$$

并且对所有 $t \geq T$ 状态保持在该球内；若 $u = 0$ 则 $x(T) = 0$ 。则称系统在预定义时间 T 满足输入到状态稳定（Predefined-Time ISS, 简记 PTS-ISS）。

Theorem 1 (PTS-ISS 的 Lyapunov 判据) 设存在 C^1 Lyapunov 函数 $V : \mathbb{R}^n \rightarrow \mathbb{R}_+$ 与类- $\mathcal{K}_\infty$ 函数 $\mathcal{A}_1, \mathcal{A}_2$ 使得

$$\mathcal{A}_1(\|x\|) \leq V(x) \leq \mathcal{A}_2(\|x\|), \quad V(0) = 0,$$

并存在给定参数 $T > 0$ 、 $\eta \in (0, 1)$ 以及类- $\mathcal{K}$ 函数 $\sigma(\cdot)$ ，使对所有 (x, u) 成立

$$\dot{V}(x, u) \leq -\frac{\pi}{\eta T} \left(V^{1-\eta/2} + V^{1+\eta/2} \right) + \sigma(\|u\|_\infty). \quad (6)$$

则对任意初值与本质有界输入 u ，在 $t = T$ 时

$$V(T) \leq \min \left\{ \left(\frac{2\eta T}{\pi} \sigma(\|u\|_\infty) \right)^{\frac{1}{1-\eta/2}}, \left(\frac{2\eta T}{\pi} \sigma(\|u\|_\infty) \right)^{\frac{1}{1+\eta/2}} \right\}, \quad (7)$$

并且对所有 $t \geq T$ 有 $V(t) \leq V(T)$ 。若 $u = 0$, $\sigma(0) = 0$ ，则 $V(T) = 0$ ，即系统在预定义时间 T 到达原点。

证明 令 $r = \|u\|_\infty$, 则 $\sigma(\|u\|_\infty) = \sigma(r)$ 为常数。由 eq. (6) 得

$$\dot{V} \leq -\frac{\pi}{\eta T} \left(V^{1-\eta/2} + V^{1+\eta/2} \right) + \sigma(r).$$

考虑比较系统

$$\dot{y} = -\frac{\pi}{\eta T} \left(y^{1-\eta/2} + y^{1+\eta/2} \right) + \sigma(r), \quad y(0) = V(0).$$

由比较引理得 $V(t) \leq y(t)$ 。对该标量系统应用 lemma 1, 将常数项 ς 替换为 $\sigma(r)$, 即可得到 eq. (7)。进一步令

$$V^*(r) = \min \left\{ \left(\frac{2\eta T}{\pi} \sigma(r) \right)^{\frac{1}{1-\eta/2}}, \left(\frac{2\eta T}{\pi} \sigma(r) \right)^{\frac{1}{1+\eta/2}} \right\},$$

则当 $V > V^*(r)$ 时右端严格为负, 故 V 下降; 当 $V \leq V^*(r)$ 时解不能超出该阈值。由于 $V(T) \leq V^*(r)$, 于是对所有 $t \geq T$ 有

$$V(t) \leq V^*(\|u\|_\infty).$$

若 $u = 0$, 则 $V^*(0) = 0$ 且 $V(T) = 0$ 。证毕。 □

Remark 1 与原??对比, [4] 要求 $\dot{V} \leq -\frac{\pi}{\eta T_p} (V^{1-\eta/2} + V^{1+\eta/2}) + \varsigma$, 其中 ς 为常数。本定理将该常数推广为输入范数的类-K 函数 $\sigma(\|u\|_\infty)$, 从而可统一刻画外界扰动、建模不确定性、饱和残差、滤波导数等所有残余影响, 并将其整合为 $\|\cdot\|_\infty$ 。两者在 $t = T$ 都给出闭式进入并保持的半径; 当 $u = 0$ 或 $\sigma(0) = 0$ 时, 本定理退化为 Lemma 1 的预定义时间到原点结论; 当 $u \neq 0$ 而有界时, 本定理给出预定义时间一致实用稳定, 收敛半径由 $\sigma(\|u\|_\infty)$ 决定, 而 Lemma 1 只能处理常数半径。

3 Global prescribed-performance function

为在预定义时间内实现全局可行的误差约束, 并兼顾稳态阶段对饱和与扰动的友好性, 本文构造一类全局性能函数 (G-PPF)。

Let $T_p > 0$ be the predefined convergence time and $0 < p < 1$. Define

$$b(t) = \left(\frac{\max\{t, t_\epsilon\}}{T_p} \right)^p \in [b_{\min}, 1],$$

where $0 < t_\epsilon \ll T_p$ is a small constant to avoid singularity at $t = 0$, and $b_{\min} = (t_\epsilon/T_p)^p \ll 1$. The window function is chosen as

$$s(b) = 1 - 3b^2 + 2b^3, \quad s(0) = 1, \quad s(1) = 0, \quad s'(1) = 0, \quad (8)$$

and the global kernel

$$\kappa(b) = \nu_1 (-\ln b)^{\nu_2}, \quad (9)$$

which ensures $\kappa(b) \rightarrow +\infty$ as $b \rightarrow 0^+$ and $\kappa(1) = 0$, $\nu_1 > 0$, $\nu_2 \geq 1$.

For each channel $i = 1, \dots, n$, we define the global performance function

$$\rho_i(t) = \begin{cases} a + \sigma_i(t) \kappa(b(t)) s(b(t)), & 0 < t < T_p, \\ a[1 + c(t) \Sigma_i(t)], & t \geq T_p, \end{cases} \quad (10)$$

where $a > 0$ is the steady-state accuracy. The factor $\sigma_i(t)$ modulates the constriction rate when $0 < t < T_p$, while $\Sigma_i(t)$ allows adjustment in response to actuator saturation and disturbances when $t \geq T_p$:

$$\begin{cases} \sigma_i(t) = \text{proj}(\sigma_0 + k_u r_{u,i} + k_d r_{d,i}, [\sigma_{\min}, \sigma_{\max}]), \\ \Sigma_i(t) = \text{proj}(k_u r_{u,i} + k_d r_{d,i} + k_e r_{e,i}, [0, \Sigma_{\max}]), \end{cases} \quad (11)$$

其中, 投影算子定义为: $\text{proj}(x, [\ell, u]) = \min\{\max\{x, \ell\}, u\}$, 其目的是为了对自适应参数进行限幅, $0 < \sigma_0 < \sigma_{\min} < \sigma_{\max}$, $\Sigma_{\max} > 0$, $\sigma_0 > 0$, $k_u > 0$, $k_d > 0$, $\tau_u > 0$, $\tau_d > 0$ 。对三类残差进行一阶滤波 C

$$\begin{cases} \tau_u \dot{r}_{u,i} = -r_{u,i} + |\Delta u_i|, \\ \tau_d \dot{r}_{d,i} = -r_{d,i} + |d_i|, \\ \tau_e \dot{r}_{e,i} = -r_{e,i} + |e_i|, \end{cases} \quad (12)$$

where $\tau_u, \tau_d, \tau_e > 0$,

When $t \geq T_p$, a smooth gate ensures C^1 transition

$$c(t) = 1 - \exp(-\iota(t - T_p)^2), \quad (13)$$

where $\iota > 0, c(T_p) = 0, c'(T_p) = 0$.

Since $\dot{b} = \frac{p}{T_p}(\frac{\max t, t_e}{T_p})^{p-1}$, $\kappa'(b) = -1/b$, $s'(b) = -6b + 6b^2$, and eq. (14). there is

$$\dot{\rho}_i(t) = \begin{cases} \dot{\sigma}_i \kappa(b) s(b) + \sigma_i [\kappa'(b) s(b) + \kappa(b) s'(b)] \dot{b}, & 0 < t < T_p, \\ a [c'(t) \Sigma_i(t) + c(t) \dot{\Sigma}_i(t)], & t \geq T_p. \end{cases} \quad (14)$$

$$\dot{\Sigma}_i = k_u \dot{r}_{u,i} + k_d \dot{r}_{d,i} + k_e \dot{r}_{e,i} = \frac{k_u}{\tau_u}(-r_{u,i} + |\Delta u_i|) + \frac{k_d}{\tau_d}(-r_{d,i} + |d_i|) + \frac{k_e}{\tau_e}(-r_{e,i} + |e_i|). \quad (15)$$

Properties 1 The function $\rho_i(t)$ in (14) has the following properties: (i) $\lim_{t \rightarrow 0^+} \rho_i(t) = +\infty$, so any finite 系统初始误差 $e_i(0)$ satisfies $|e_i(0)| < \rho_i(0^+)$. (ii) 由 $\kappa(1) = 0, s(1) = 0$ 得 $\rho_i(T_p^-) = a$; 由 $s'(1) = 0$ 与 $c(T_p) = c'(T_p) = 0$ 得 $\dot{\rho}_i(T_p^-) = \dot{\rho}_i(T_p^+) = 0$, 实现 C^1 级平滑衔接. (iii) For $t \geq T_p$, $\rho_i(t) = a[1 + c(t)\Sigma_i(t)] \geq a$, with c and Σ_i bounded and low-pass filtered, thus ρ_i remains positive and slowly varying. (iv) 通过约束 $\sigma \in [\sigma_{\min}, \sigma_{\max}]$ 和 $\Sigma \in [0, \Sigma_{\max}]$ 实现, $\rho, \dot{\rho}$ 有界且变化缓慢, 对闭环注入高频激励.

有界慢变特性:

Remark 2 我们构造的一类全局预设性能函数, 系统性解决传统 PPC/BLF-PPF 的三类痛点: (i) 初值越界诱发进入阶段奇异, 常需投影/重置/非对称缩放等权宜处理; (ii) 在 T_p 处边界多为仅连续非 C^1 , 易在控制律中产生尖峰项并放大噪声; (iii) 收敛后采用固定且过窄管径, 面对执行器饱和与外扰时保守与抖振并存. 所提 G-PPF 实现预定义时间内平滑收紧而初值全局合法. 而且进一步, 引入前段 $\sigma(t)$ 调速收紧, 与后段 $\Sigma(t)$ 稳态放宽两级解耦调节, 并按饱和残差与扰动强度低通自适应调整约束, 避免长期保守. 与此同时, 给出 $\dot{\rho}(t)$ 的显式解析式, 使 BLF 导数中的边界变化项可被严格抵消, 不遗留常数残差, 从而将闭环 Lyapunov 不等式自然规范为 PTS-ISS 形态. 该构造可在严格保证预定义时间稳定的同时提升稳态精度与执行器友好性.

4 Main results

4.1 Controller design

This work presents a controller design methodology that integrates the backstepping approach with BLFs to achieve both predefined-time convergence and prescribed performance constraints.

In a trajectory tracking control system, to guarantee that tracking error meets the prescribed dynamic and steady-state performance requirements, define the tracking error as

$$\begin{cases} z_1 = x_1 - q_d, \\ z_2 = x_2 - \alpha^f - \zeta, \end{cases} \quad (16)$$

$$-\rho_i(t) < z_1(t) < \rho_i(t) \quad (17)$$

where α is the virtual control, α^f is a filtered version of α , and $\zeta \in \mathbb{R}^n$ are dynamic anti-saturation compensators of actual controller.

To smooth the signal and facilitate the design of the subsequent control law, the filter of the virtual controller α^f is introduced with the following dynamic equations:

$$\beta \dot{\alpha}^f = -(\alpha^f - \alpha), \quad (18)$$

where $0 < \beta < 1, \alpha^f(0) = \alpha(0)$. Define the filtering error is $\tilde{\alpha} = \alpha - \alpha^f$.

为将饱和残差在预设时间 $T_\zeta < cT_p$ ($0 < c < 1$) 内抽干, 引入动态补偿信号 ζ :

$$\begin{cases} \dot{\zeta} = \delta - \mu \zeta - M^{-1}(q) \Delta u, \\ \delta = -\frac{\pi}{2\gamma T_\zeta} (|\zeta|^{1-\gamma} \text{sgn}(\zeta) + |\zeta|^{1+\gamma} \text{sgn}(\zeta)), \end{cases} \quad (19)$$

其中 $0 < \gamma < 1$, $\mu > 0$, 并取初值 $\zeta(0) = [\zeta_{1,i}(0), \zeta_{2,i}(0)]^\top = [0, 0]^\top$.

In the first step, a BLF is used as an energy function for the error dynamics. We choose:

$$V_1 = \frac{1}{2} \sum_{i=1}^n \frac{\rho_{1,i}^2 z_{1,i}^2}{\rho_{1,i}^2 - z_{1,i}^2}. \quad (20)$$

求 V_1 的时间导数为

$$\begin{aligned} \dot{V}_1 &= \sum_{i=1}^n \left[\frac{\rho_{1,i}^4 z_{1,i}}{(\rho_{1,i}^2 - z_{1,i}^2)^2} \dot{z}_{1,i} - \frac{\rho_{1,i} z_{1,i}^4}{(\rho_{1,i}^2 - z_{1,i}^2)^2} \dot{\rho}_{1,i} \right] \\ &= \sum_{i=1}^n \left[\frac{\rho_{1,i}^4 z_{1,i}}{(\rho_{1,i}^2 - z_{1,i}^2)^2} (z_{2,i} - \dot{q}_{d,i} + \alpha_i^f + \zeta_i) - \frac{\rho_{1,i} z_{1,i}^4}{(\rho_{1,i}^2 - z_{1,i}^2)^2} \dot{\rho}_{1,i} \right] \end{aligned} \quad (21)$$

记 $P_i = \frac{\rho_{1,i}^4}{(\rho_{1,i}^2 - z_{1,i}^2)^2} > 0$, $Q_i = \frac{z_{1,i}^4}{(\rho_{1,i}^2 - z_{1,i}^2)^2} > 0$, $\rho_{1,i}^2 - z_{1,i}^2 \leq \rho_{1,i}^2$, $\Phi_i = \frac{z_{1,i}(\rho_{1,i}^2 - z_{1,i}^2)}{\rho_{1,i}^4}$. 将 $\dot{z}_{1,i} = z_{2,i} - \dot{q}_{d,i} + \alpha_i^f + \zeta_i$ 代入 BLF 导数后, 并根据公式 (), 得到

$$\dot{V}_1 = \sum_{i=1}^n \left[P_i z_{1,i} z_{2,i} + P_i z_{1,i} (\alpha_i + \zeta_i - \dot{q}_{d,i}) - P_i z_{1,i} \tilde{\alpha}_i - Q_i \rho_{1,i} \dot{\rho}_{1,i} \right]$$

把它代回, 可设计虚拟控制律为:

$$\alpha_i = \dot{q}_{d,i} - \zeta_i + \frac{z_{1,i}^3}{\rho_{1,i}^3} \dot{\rho}_{1,i} - \mathcal{K}_{1,i}(z_{1,i}, \rho_{1,i}) \Phi_i - k_{1,i} \Phi_i, \quad (22)$$

where $k_1 = \text{diag}(k_{1,1}, k_{1,2}, \dots, k_{1,n})$, $k_{1,i} > 0$, $\mathcal{K}_{1,i}(z_{1,i}, \rho_{1,i}) = \frac{\pi \rho_{1,i}^2}{2\eta T_p} (V_{1,i}^{-\eta/2} + n^{-\eta/2} V_{1,i}^{\eta/2})$.

则一步 Lyapunov 导数化简为

$$\dot{V}_1 \leq \sum_{i=1}^n \left(P_i z_{1,i} z_{2,i} - \frac{2}{\rho_{1,i}^2} V_{1,i} \mathcal{K}_{1,i} - \frac{2}{\rho_{1,i}^2} k_{1,i} V_{1,i} - P_i z_{1,i} \tilde{\alpha}_i \right).$$

In the second step, a BLF is used as an energy function for the error dynamics. We choose:

$$V_2 = V_1 + \frac{1}{2} \sum_{i=1}^n z_{2,i}^\top z_{2,i}. \quad (23)$$

Using $\dot{z}_{2,i} = \dot{x}_{2,i} - \dot{\alpha}_i^f - \dot{\zeta}_i$, we obtain the time derivative of V_2 is as

$$\begin{aligned} \dot{V}_2 &= \dot{V}_1 + \sum_{i=1}^n z_{2,i} \dot{z}_{2,i} = \dot{V}_1 + \sum_{i=1}^n \left[z_{2,i} (\dot{x}_{2,i} - \dot{\alpha}_i^f - \dot{\zeta}_i) \right] \\ &\leq \sum_{i=1}^n \left[P_i z_{1,i} z_{2,i} + z_{2,i} \left(f_i(x) + \omega_i(x, t) + g_i(u_i' - \Delta u_i) - \dot{\alpha}_i^f - \delta_i + \mu \zeta_i + g_i \Delta u_i \right) \right] \end{aligned} \quad (24)$$

The control input torque is designed as

$$u' = C(q, \dot{q}) x_2 + G(q) + M(q) [\dot{\alpha}^f + \delta - \mu \zeta - P_1 z_1 - \mathcal{K}_2(z_2) - \hat{\omega} - k_s \text{sgn}(z_2) - k_2 z_2] \quad (25)$$

where $k_2 = \text{diag}(k_{2,1}, k_{2,2}, \dots, k_{2,n})$, $k_{2,i} > 0$, $k_s > 0$, $\mathcal{K}_2(z_2) = \frac{\pi}{2\eta T_p} [2^{\eta/2} |z_2|^{1-\eta} \text{sgn}(z_2) + (\frac{n}{2})^{-\eta/2} |z_2|^{1+\eta} \text{sgn}(z_2)]$.

为结构不确定和额外扰动, 避免直接微分速度, 采用一阶跟踪微分器作为观测器

$$\begin{cases} \dot{\vartheta} = -\omega_d \vartheta + \omega_d x_2, \\ \hat{x}_2 = \omega_d (x_2 - \vartheta), \\ \dot{\hat{\omega}} = -\Lambda \hat{\omega} + \Lambda (\hat{x}_2 - f(x) - g(q) u), \end{cases} \quad (26)$$

where $\Lambda = \text{diag}(\lambda_1, \dots, \lambda_n)$, $\lambda_i > 0$, $\omega_d > 0$, $\vartheta \in \mathbb{R}^n$, $\vartheta(0) = x_2(0)$, $\hat{\omega}(0) = 0$, 设观测误差为 $\tilde{\omega} = \omega - \hat{\omega}$. 其动力学为

$$\dot{\tilde{\omega}} = -\Lambda \tilde{\omega} + \Delta_{\omega}, \quad \Delta_{\omega} = \dot{\omega} - \Lambda \varepsilon_d, \quad (27)$$

$\varepsilon_d = \hat{x}_2 - \dot{x}_2$ 为跟踪微分器误差,一致有界并可收敛.

根据公式可得到

$$\dot{V}_2 \leq \sum_{i=1}^n \left(-\frac{2}{\rho_{1,i}^2} V_{1,i} \mathcal{K}_{1,i} - \frac{2}{\rho_{1,i}^2} k_{1,i} V_{1,i} - P_i z_{1,i} \tilde{\alpha}_i \right) + \sum_{i=1}^n \left(-z_{2,i} \mathcal{K}_{2,i} - z_{2,i} \tilde{\omega}_i - k_{2,i} z_{2,i}^2 \right) - k_s \sum_{i=1}^n z_{2,i} \text{sgn}(z_{2,i}) \quad (28)$$

5 Stability analysis

We analyze the stability of the closed-loop system under the proposed controller. A composite Lyapunov function eq. (38) is constructed by combining the BLF-based error energy, the virtual-control filtering error $\tilde{\alpha}$, and the Observer error $\tilde{\omega}$. Sufficient conditions for the global stability of the system and for all signals to be bounded are given by the derivation of its time derivative inequality. Finally, we prove that, for any initial state, the trajectories enter a compact set no later than the predefined time T_p . This establishes global predefined-time stability.

Theorem 2 Under Assumptions 1 and 2 and ?? and the controller in ???? with observers ???? and weight update ??, and under certain parameter conditions. At this point, for any initial condition, the closed-loop system is predefined-time stable. The scaled errors $z_{1,i}(t), z_{2,i}(t)$ enter a compact set no later than T_p , hence $|e_i(t)| < \rho_i(t)$ for all t , and $e_i(t)$ converges to a prescribed small neighborhood of the origin.

证明 The composite Lyapunov function is constructed as follows

$$\mathcal{L} = V_2 + \frac{1}{2} \|\tilde{\alpha}\|^2 + \frac{1}{2} \|\tilde{\omega}\|^2 \quad (29)$$

The time derivative of eq. (38) is given by

$$\begin{aligned} \dot{\mathcal{L}} &\leq \sum_{i=1}^n \left(-\frac{2}{\rho_{1,i}^2} V_{1,i} \mathcal{K}_{1,i} - \frac{2}{\rho_{1,i}^2} k_{1,i} V_{1,i} - P_i z_{1,i} \tilde{\alpha}_i \right) + \sum_{i=1}^n \left(-z_{2,i} \mathcal{K}_{2,i} - z_{2,i} \tilde{\omega}_i - k_{2,i} z_{2,i}^2 \right) - k_s \sum_{i=1}^n P_{2,i} |z_{2,i}| + \tilde{\alpha}^\top \dot{\tilde{\alpha}} + \tilde{\omega}^\top \dot{\tilde{\omega}} \\ &\leq \sum_{i=1}^n \left(-\frac{2}{\rho_{1,i}^2} V_{1,i} \mathcal{K}_{1,i} - z_{2,i} \mathcal{K}_{2,i} \right) - \sum_{i=1}^n \frac{2}{\rho_{1,i}^2} k_{1,i} V_{1,i} - \sum_{i=1}^n k_{2,i} z_{2,i}^2 + \tilde{\alpha}^\top \dot{\tilde{\alpha}} - \sum_{i=1}^n P_i z_{1,i} \tilde{\alpha}_i - \sum_{i=1}^n z_{2,i} \tilde{\omega}_i + \tilde{\omega}^\top \dot{\tilde{\omega}} - k_s \sum_{i=1}^n |z_{2,i}| \end{aligned} \quad (30)$$

在 BLF 约束内会存在 $|z_{1,i}(t)| < \rho_{1,i}(t)$ 不变, 故存在常数 $v \in (0, 1)$ 使 $|z_{1,i}(t)|/\rho_{1,i}(t) \leq 1 - v, \forall t \in (0, +\infty)$. 令 $c_v = \frac{1}{(2v-v^2)^2} > 0$, 可得到 $|P_i z_{1,i}| \leq c_v |z_{1,i}| \leq c_v \sqrt{2V_{1,i}}$. Then, we get

$$|P_i z_{1,i} \tilde{\alpha}_i| \leq c_v \sqrt{2V_{1,i}} |\tilde{\alpha}_i| \leq \varepsilon V_{1,i} + \frac{c_v^2}{2\varepsilon} \tilde{\alpha}_i^2,$$

where $\varepsilon > 0$ is a positive constant.

由 $\beta \dot{\alpha}^f = -(\alpha^f - \alpha)$ 得 $\dot{\tilde{\alpha}} = \dot{\alpha} - \frac{1}{\beta} \tilde{\alpha}$, 从而

$$\tilde{\alpha}^\top \dot{\tilde{\alpha}} \leq -\frac{1}{2\beta} \|\tilde{\alpha}\|^2 + \beta \mathcal{E}(t),$$

其中 $\mathcal{E}(t)$ 是 a continuous and bounded function, 并且由有界信号构成。

将其与 (3) 相加, 可得

$$\begin{aligned} \mathcal{L}_\alpha &= -\sum_{i=1}^n P_i z_{1,i} \tilde{\alpha}_i - \sum_{i=1}^n \frac{2}{\rho_{1,i}^2} k_{1,i} V_{1,i} + \tilde{\alpha}^\top \dot{\tilde{\alpha}} \\ &\leq \varepsilon \sum_{i=1}^n V_{1,i} + \frac{c_v^2}{2\varepsilon} \sum_{i=1}^n \|\alpha\|^2 - \sum_{i=1}^n \frac{2}{\rho_{1,i}^2} k_{1,i} V_{1,i} - \frac{1}{2\beta} \|\tilde{\alpha}\|^2 + \beta \mathcal{E}(t) \\ &\leq \sum_{i=1}^n \left(\varepsilon - \frac{2}{\rho_{1,i}^2} k_{1,i} \right) V_{1,i} + \left(\frac{c_v^2}{2\varepsilon} - \frac{1}{2\beta} \right) \|\alpha\|^2 + \beta \mathcal{E}(t) \end{aligned} \quad (31)$$

结合eq. (27), and let

$$\begin{aligned}\mathcal{L}_\omega &= -\sum_{i=1}^n z_{2,i} \tilde{\omega}_i + \tilde{\omega}^\top \dot{\tilde{\omega}} - k_s \sum_{i=1}^n |z_{2,i}| \\ &= -\tilde{\omega}^\top \Lambda \tilde{\omega} - \sum_{i=1}^n z_{2,i} \tilde{\omega}_i - k_s \sum_{i=1}^n |z_{2,i}| + \tilde{\omega}^\top \Delta_\omega.\end{aligned}\tag{32}$$

取任意 $\epsilon_1, \epsilon_2 \in (0, 1)$, 根据 Young 不等式, 可得

$$|\tilde{\omega}^\top z_2| = |(\Lambda^{1/2} \tilde{\omega})^\top \Lambda^{-1/2} z_2| \leq \frac{\epsilon_1}{2} \tilde{\omega}^\top \Lambda \tilde{\omega} + \frac{1}{2\epsilon_1} \|\Lambda^{-1/2} z_2\|^2,$$

$$\tilde{\omega}^\top \Delta_\omega \leq \frac{\epsilon_2}{2} \tilde{\omega}^\top \Lambda \tilde{\omega} + \frac{1}{2\epsilon_2} \|\Lambda^{-1/2} \Delta_\omega\|^2.$$

代回 $\mathcal{L}_\omega$ 可得

$$\mathcal{L}_\omega \leq -\left(1 - \frac{\epsilon_1 + \epsilon_2}{2}\right) \tilde{\omega}^\top \Lambda \tilde{\omega} + \sum_{i=1}^n \left[\frac{1}{2\epsilon_1 \lambda_i} z_{2,i}^2 - k_s |z_{2,i}| \right] + \frac{1}{2\epsilon_2} \|\Lambda^{-1/2} \Delta_\omega\|^2.$$

采用配方法处理, 有

$$\sum_{i=1}^n \left(\frac{1}{2\epsilon_1 \lambda_i} z_{2,i}^2 - k_s |z_{2,i}| \right) \leq -\frac{\epsilon_1}{2} k_s^2 \text{tr}(\Lambda) \leq 0.$$

这是一个有利的负常数, 为了简洁可直接丢弃而保持上界。进一步用 $\tilde{\omega}^\top \Lambda \tilde{\omega} \geq \lambda_{\min} \|\tilde{\omega}\|^2$, 于是得到

$$\mathcal{L}_\omega \leq -\left(1 - \frac{\epsilon_1 + \epsilon_2}{2}\right) \lambda_{\min} \|\tilde{\omega}\|^2 + \frac{1}{2\epsilon_2} \|\Lambda^{-1/2} \Delta_\omega\|^2,$$

$$\begin{aligned}\dot{\mathcal{L}} &\leq \sum_{i=1}^n \left(-\frac{2}{\rho_{1,i}^2} V_{1,i} \mathcal{K}_{1,i} - z_{2,i} \mathcal{K}_{2,i} \right) + \sum_{i=1}^n \left(\varepsilon - \frac{2}{\rho_{1,i}^2} k_{1,i} \right) V_{1,i} + \left(\frac{c_v^2}{2\varepsilon} - \frac{1}{2\beta} \right) \|\alpha\|^2 + \beta \mathcal{E}(t) - k_{2,i} \sum_{i=1}^n z_{2,i}^2 \\ &\quad - \left(1 - \frac{\epsilon_1 + \epsilon_2}{2} \right) \lambda_{\min} \|\tilde{\omega}\|^2 + \frac{1}{2\epsilon_2} \|\Lambda^{-1/2} \Delta_\omega\|^2 \\ &\leq \sum_{i=1}^n \left(\varepsilon - \frac{2}{\rho_{1,i}^2} k_{1,i} \right) V_{1,i} - k_{2,i} \sum_{i=1}^n z_{2,i}^2 - \left(\frac{1}{2\beta} - \frac{c_v^2}{2\varepsilon} \right) \|\tilde{\alpha}\|^2 - \left(1 - \frac{\epsilon_1 + \epsilon_2}{2} \right) \lambda_{\min} \|\tilde{\omega}\|^2 + \frac{1}{2\epsilon_2} \|\Lambda^{-1/2} \Delta_\omega\|^2 + \beta \mathcal{E}(t)\end{aligned}\tag{33}$$

After organizing ??, the principal negative qualitative and constant bounded terms of Lyapunov's derivative can be obtained, which further leads to

$$\dot{\mathcal{L}} \leq -\mathcal{ML} + \mathcal{N}(t),\tag{34}$$

with

$$\mathcal{M} = \min \left\{ \min_i \left(\frac{2}{\rho_{1,i}^2} k_{1,i} - \varepsilon \right), \min_i \{ 2k_{2,i} \}, \min_i \left(\frac{1}{\beta} - \frac{c_v^2}{\varepsilon} \right), \min_i \left(\frac{1}{2} - \epsilon_1 - \epsilon_2 \right) \right\} > 0,\tag{35}$$

$$\mathcal{N}(t) = \frac{1}{2\varepsilon} \|\Lambda^{-1/2} \Delta_\omega\|^2 + \beta \mathcal{E}(t).\tag{36}$$

From the above ?? and eqs. (34) to (36), as long as the controller parameters are chosen reasonably, $\mathcal{L}$ is 一致有界并可收敛, which implies all signals $z_1, z_2, \tilde{\alpha}, \tilde{\omega}$ are bounded within the compact set Φ , 从而存在常数 $\phi > 0$ such that

$$(z_1, z_2, \tilde{\alpha}, \tilde{\omega}) \in \Phi = \left\{ \|(z_1, z_2, \tilde{\alpha}, \tilde{\omega})\| \leq \sqrt{\phi} \right\}.\tag{37}$$

According to eqs. (37) and (38) and ?? and ??, it follows that

$$\begin{aligned}\dot{\mathcal{L}} &\leq -\frac{\pi}{\eta T_p} \sum_{i=1}^n \left[(V_{1,i})^{1-\eta/2} + n^{-\eta/2} (V_{1,i})^{1+\eta/2} \right] - \frac{\pi}{\eta T_p} \sum_{i=1}^n \left[\left(\frac{1}{2} z_{2,i}^2 \right)^{1-\eta/2} + n^{-\eta/2} \left(\frac{1}{2} z_{2,i}^2 \right)^{1+\eta/2} \right] \\ &\quad - \frac{\pi}{\eta T_p} \sum_{i=1}^n \left[\left(\frac{1}{2} \tilde{\alpha}^2 \right)^{1-\eta/2} + \left(\frac{1}{2} \tilde{\omega}^2 \right)^{1-\eta/2} \right] - n^{\eta/2} \frac{\pi}{\eta T_p} \sum_{i=1}^n \left[\left(\frac{1}{2} \tilde{\alpha}^2 \right)^{1+\eta/2} + \left(\frac{1}{2} \tilde{\omega}^2 \right)^{1+\eta/2} \right] \\ &\quad + \frac{2\pi}{\eta T_p} \sum_{i=1}^n \left[\left(\frac{\phi}{2} \right)^{1-\eta/2} + n^{\eta/2} \left(\frac{\phi}{2} \right)^{1+\eta/2} \right] + \mathcal{N}(t) \\ &\leq -\frac{\pi}{\eta T_p} \left[\sum_{i=1}^n V_{1,i} + \sum_{i=1}^n \frac{1}{2} z_{2,i}^2 + \left(\frac{1}{2} \tilde{\alpha}^2 \right) + \left(\frac{1}{2} \tilde{\omega}^2 \right) \right]^{1-\eta/2} - \frac{\pi}{\eta T_p} \left[\sum_{i=1}^n V_{1,i} + \sum_{i=1}^n \frac{1}{2} z_{2,i}^2 + \left(\frac{1}{2} \tilde{\alpha}^2 \right) + \left(\frac{1}{2} \tilde{\omega}^2 \right) \right]^{1+\eta/2} \\ &\quad + \frac{2\pi}{\eta T_p} \sum_{i=1}^n \left[\left(\frac{\phi}{2} \right)^{1-\eta/2} + n^{\eta/2} \left(\frac{\phi}{2} \right)^{1+\eta/2} \right] + \mathcal{N}(t) \\ &\leq -\frac{\pi}{\eta T_p} \left(\mathcal{L}^{1-\eta/2} + \mathcal{L}^{1+\eta/2} \right) + \mathcal{R}(t)\end{aligned}\tag{38}$$

where

$$\mathcal{R}(t) = \frac{2\pi}{\eta T_p} \sum_{i=1}^n \left[\left(\frac{\phi}{2} \right)^{1-\eta/2} + n^{\eta/2} \left(\frac{\phi}{2} \right)^{1+\eta/2} \right] + \mathcal{N}(t). \quad (39)$$

令

$$\overline{\mathcal{R}}_t = \operatorname{ess\,sup}_{0 \leq s \leq t} \mathcal{R}(s),$$

考虑比较系统

$$\dot{y} = -\frac{\pi}{\eta T_p} \left(y^{1-\eta/2} + y^{1+\eta/2} \right) + \overline{\mathcal{R}}_t, \quad y(0) = \mathcal{L}(0).$$

由比较引理有 $\mathcal{L}(t) \leq y(t)$ 。对上述标量系统应用预定义时间稳定引理（你文中的 Lemma 1），得到在 $t = T_p$ 时

$$y(T_p) \leq \gamma(\overline{\mathcal{R}}_{T_p}) = \min \left\{ \left(\frac{2\eta T_p \overline{\mathcal{R}}_{T_p}}{\pi} \right)^{\frac{1}{1-\eta/2}}, \left(\frac{2\eta T_p \overline{\mathcal{R}}_{T_p}}{\pi} \right)^{\frac{1}{1+\eta/2}} \right\}.$$

于是

$$\mathcal{L}(t) \leq o(\mathcal{L}(0), t) + \gamma \left(\sup_{0 \leq s \leq t} \mathcal{R}(s) \right),$$

where $o(t) = 0$ ($t \geq T_p$). 当 $\mathcal{R} = 0$ 时, $\mathcal{L}(T_p) = 0$; 有界输入时, 在 $t = T_p$ 以前吸入到半径 $\gamma(\|\mathcal{R}\|_{\infty, [0, T_p]})$ 的紧集内。等价地, 设

$$\Omega = \{ \mathcal{S} : \mathcal{L}(T_p) \leq \gamma(\overline{\mathcal{R}}_{T_p}) \}, \quad \mathcal{S} = [z_1, z_2, \tilde{\alpha}, \tilde{\omega}]^\top,$$

Remark 3 若 $\Delta_\omega, \mathcal{E}(t) \in L_\infty$, 则 $\mathcal{R}(t) \in L_\infty$, 因而 $\overline{\mathcal{R}}_{T_p} < \infty$, 结论成立; 当 $\mathcal{R} = 0$ 时得到严格的预定义时间收敛。

The stability proof is completed. □

Theorem 3 在适当参数 ($0 < \gamma < 1, \mu > 0, T_\zeta > 0$) 下, 补偿器 (19) 使所有通道的 $\zeta_i(t)$ 在 $t = T_\zeta$ 之前严格收敛到零或给定的极小邻域; 若 $\Delta u_i = 0$ (饱和不被触发), 则 ζ_i 在 T_ζ 内收敛到原点。该性质与主闭环的 *BLF-PTS* 设计可并行成立。

证明 针对每个 i 通道, 设计 Lyapunov 函数如下

$$\mathcal{L}_{\zeta,i} = \frac{1}{2} \zeta_i^2.$$

对 $\mathcal{L}_{\zeta,i}$ 求时间导数。并结合 $\zeta_i \operatorname{sgn}(\zeta_i)^\alpha = |\zeta_i|^{\alpha+1}$ 得

$$\dot{\mathcal{L}}_{\zeta,i} = -\frac{\pi}{2\gamma T_\zeta} \left[(\mathcal{L}_{\zeta,i})^{1-\gamma/2} + (\mathcal{L}_{\zeta,i})^{1+\gamma/2} \right] - \mu \zeta_i^2 - \zeta_i (g \Delta u)_i.$$

对交叉项用 Young 不等式:

$$|\zeta_i (g \Delta u)_i| \leq \frac{\mu}{2} \zeta_i^2 + \frac{1}{2\mu} (g \Delta u)_i^2.$$

合并上式并丢弃额外负项 $-\frac{\mu}{2} \sum \zeta_i^2 \leq 0$

$$\dot{\mathcal{L}}_{\zeta,i} \leq -\frac{\pi}{2\gamma T_\zeta} \left[(\mathcal{L}_{\zeta,i})^{1-\gamma/2} + (\mathcal{L}_{\zeta,i})^{1+\gamma/2} \right] + \sum_{i=1}^n \frac{1}{2\mu} (g \Delta u)_i^2.$$

因为执行器幅值有限, Δu 本质有界: $\|\Delta u\|_\infty < \infty$. 令 $\bar{g} \geq \max_i |g_i|$, 则 $\frac{\bar{g}^2}{2\mu} \|\Delta u\|_\infty^2 \triangleq \varphi(\|\Delta u\|_\infty)$, 其中 $\varphi(r) = \frac{\bar{g}^2}{2\mu} r^2 \in \mathcal{K}$. 因此

$$\dot{\mathcal{L}}_{\zeta,i} \leq -\frac{\pi}{\gamma T_\zeta} \left(\mathcal{L}_{\zeta,i}^{1-\gamma/2} + \mathcal{L}_{\zeta,i}^{1+\gamma/2} \right) + \varphi(\|\Delta u\|_\infty),$$

由引理可得在 $t = T_\zeta$:

$$\mathcal{L}_{\zeta,i}(T_\zeta) \leq \min \left\{ \left(\frac{2\gamma T_\zeta \varphi(\|\Delta u\|_\infty)}{\pi} \right)^{\frac{1}{1-\gamma/2}}, \left(\frac{2\gamma T_\zeta \varphi(\|\Delta u\|_\infty)}{\pi} \right)^{\frac{1}{1+\gamma/2}} \right\},$$

并且对所有 $t \geq T_\zeta$ “进入并保持”。若饱和未触发 ($\Delta u_i = 0, \varphi(0) = 0$), 则 $\mathcal{L}_{\zeta,i}(T_\zeta) = 0$, 从而在 T_ζ 内到达原点。

Remark 4 本证明严格地把饱和残差 Δu 视为输入，给出 PTS-ISS 形式的微分不等式；这样既覆盖饱和和被触发的情形，又在无饱和时自然退化为 PTS 到达原点的结论。

□

6 Simulation and Experiment

6.1 Simulation

We consider the 2-DOF manipulator, where $x_1 = [q_1, q_2]^\top$ represents the joint angles of the manipulator. The dynamic model is as follows, the inertia matrix $M_0(q)$: $M_{11} = r_1 + r_2 + 2r_3 \cos q_2$, $M_{12} = M_{21} = r_2 + r_3 \cos q_2$, $M_{22} = r_2$; the centrifugal matrix $C_0(q, \dot{q})$: $C_{11} = -r_3 \dot{q}_2 \sin q_2$, $C_{12} = -r_3(\dot{q}_1 + \dot{q}_2) \sin q_2$, $C_{21} = r_3 \dot{q}_1 \sin q_2$, $C_{22} = 0$; The gravity vector $G_0(q)$: $Q = r_4 g \cos q_1 + r_5 g \cos(q_1 + q_2)$, $G_2 = r_5 g \cos(q_1 + q_2)$. The lumped constants are $r_1 = m_1 l_{c1}^2 + I_1 + m_2 l_1^2$, $r_2 = I_2 + m_2 l_{c2}^2$, $r_3 = m_2 l_1 l_{c2}$, $r_4 = m_1 l_{c1} + m_2 l_1$, $r_5 = m_2 l_{c2}$. Here, m_i , I_i , and l_i are the mass, moment of inertia, and length of the i th link, respectively, and l_{ci} is the distance from the $(i-1)$ joint to the center of mass of the i th link; The mass and inertia parameters are set as: $m_1 = 1$ kg, $m_2 = 0.75$ kg, $l_1 = 0.35$ m, $l_2 = 0.31$ m, $l_{c1} = 0.175$ m, $l_{c2} = 0.155$ m, $I_1 = 0.25 m_1 l_1^2$ kg m², $I_2 = 0.25 m_2 l_2^2$ kg m², $g = 9.8$ m/s².

The control objective is to design the control torque u so that the joints track a desired joint-space trajectory within prescribed performance and a predefined-time. The initial velocity is $\dot{x}(0) = [\dot{q}_1(0), \dot{q}_2(0)]^\top = [0, 0]^\top$ rad/s. The desired joint trajectories are $q_d = [0.1 \sin(4.5t) + \cos(4.5t), 0.1 \sin(4.5t) + \cos(4.5t)]^\top$, $\dot{q}_d = [0.45 \cos(4.5t) - 4.5 \sin(4.5t), 0.45 \cos(4.5t) - 4.5 \sin(4.5t)]^\top$.

The prescribed-performance horizon and shaping are $T_p = 3$ s, $p = 0.3$, with steady tube floor $a = 0.01$. The G-PPF adapts online using low-pass filtered residuals $|\Delta u|, |d|, |e|$ with $(\tau_u, \tau_d, \tau_e) = (0.05, 0.1, 0.08)$ and gains $(k_u, k_d, k_e) = (1.8, 0.3, 0.8)$; the pre-phase gain is limited by $\sigma_0 = 1.0$, $[\sigma_{\min}, \sigma_{\max}] = [1.2, 2]$; the post-phase amplitude is capped by $\Sigma_{\max} = 20$ and $\iota = 3$. The controller parameters are set as: $\eta = 0.1$, $\beta = 0.2$, $k_1 = \text{diag}(36, 30)$, $k_2 = \text{diag}(12, 12)$, $k_s = 2.2$. The dynamic anti-saturation compensator ζ adopts $T_\zeta = 1.8$ s, $\gamma = 0.4$, $\mu = 14$. The observer uses $\omega_d = 0.6$ and $\Lambda = \text{diag}(0.5, 0.5)$. The actuator torque is saturated component-wise as $u_1 \in [-10, 10]$ N · m, $u_2 \in [-4, 4]$ N · m.

Case 1: Different convergence times

To further verify the time-constrained stability of the proposed control method, we conduct a series of simulations to examine the impact of the predefined-time T_p on system performance. We select $T_p \in \{1.5, 2.5, 3.5\}$ s while fixing the initial state at $x_1(0) = [\pi/2, \pi/2]^\top$; all other parameters are kept unchanged. The results in figs. 1 to 3 show that in all cases the error enters the prescribed envelope before T_p and converges to zero, confirming strict tunability with respect to T_p . With $T_p = 1.5$ s, the torques saturate early but the anti-saturation compensation maintains convergence. With $T_p = 3.5$ s, the decay is slower and mild high-frequency ripple appears, yet constraints and stability are preserved, indicating fast corrective action by the compensator. Overall, the controller achieves the desired timing and accuracy across T_p settings, even under input saturation.

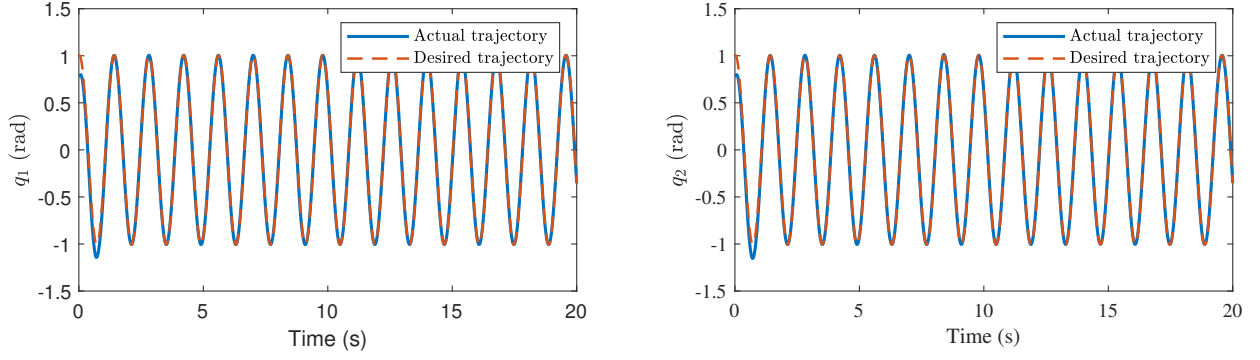


图 1 Position tracking errors under different predefined times T_p .

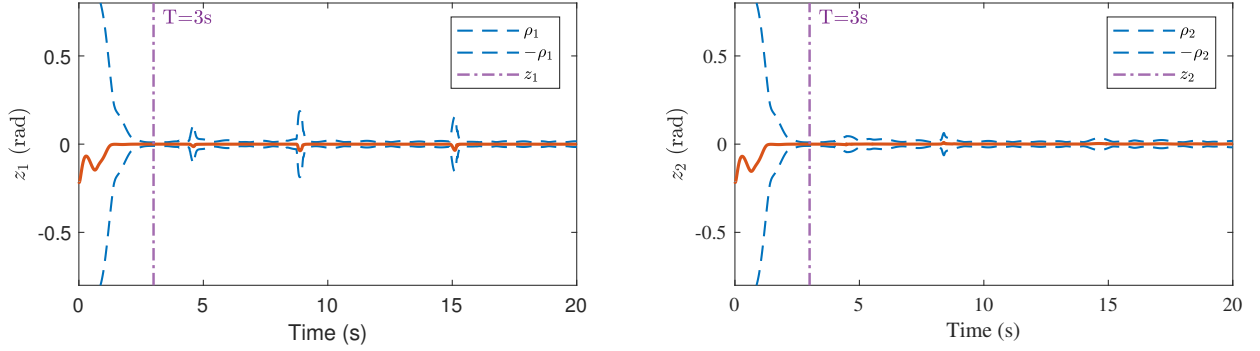


图 2 Velocity tracking errors under different predefined times T_p .

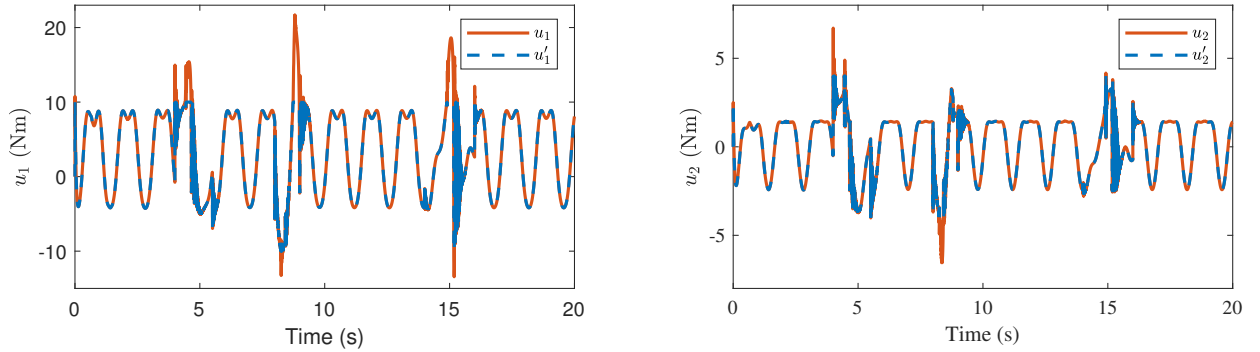


图 3 Control input torques under different predefined times T_p .

Case 2: Different initial state conditions

To assess how initial states affect control performance under input saturation and its compensation, we fix the predefined-time at $T_p = 2.5\text{s}$ and test two classes of initial conditions: in-envelope $x_1(0) \in \{[\pi/2, \pi/2]^T, [\pi/4, \pi/4]^T, [0, \pi/2]^T\}$ and out-of-envelope $x_1(0) \in \{[\pi, \pi]^T, [-\pi/2, -\pi/2]^T, [-3\pi/4, -3\pi/4]^T\}$. The results in figs. 4 to 6 show that, for in-envelope cases, the system achieves fast and smooth tracking: errors decay to near zero before T_p , velocity responses exhibit no noticeable ripple, and torque magnitudes remain moderate. For out-of-envelope cases, errors enter the prescribed envelope within $0.5\text{--}1.5\text{s}$ and still converge by T_p ; torques are larger early on but drop quickly, indicating strong initial drive followed by stabilization. These findings confirm that, with input saturation and anti-saturation compensation, the proposed controller ensures error “legalization” (entry into the envelope) and global convergence within T_p regardless of the initial condition, i.e., the time of convergence is independent of the initial state.

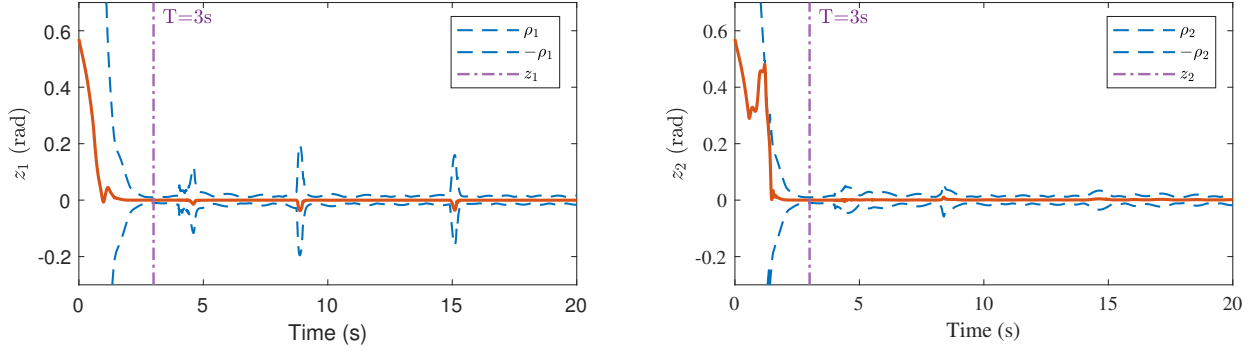


图 4 Position tracking errors under different initial values of $x_1(0)$.

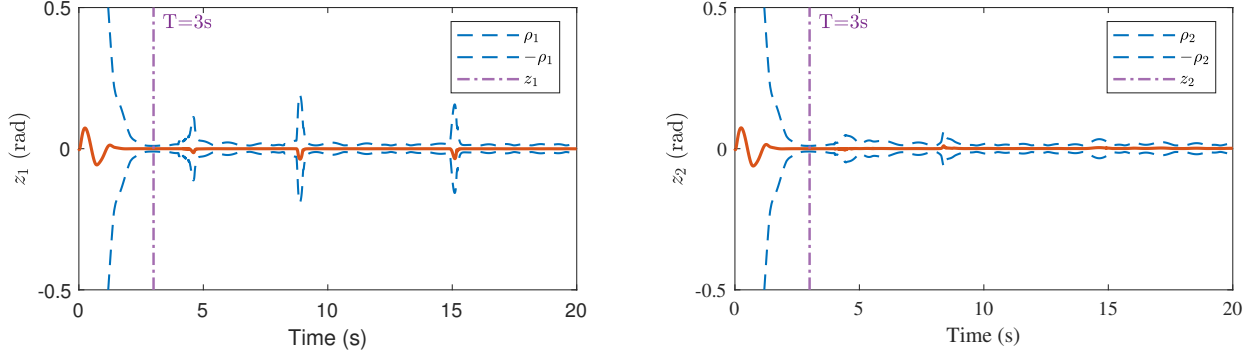


图 5 Velocity tracking errors under different initial values of $x_1(0)$.

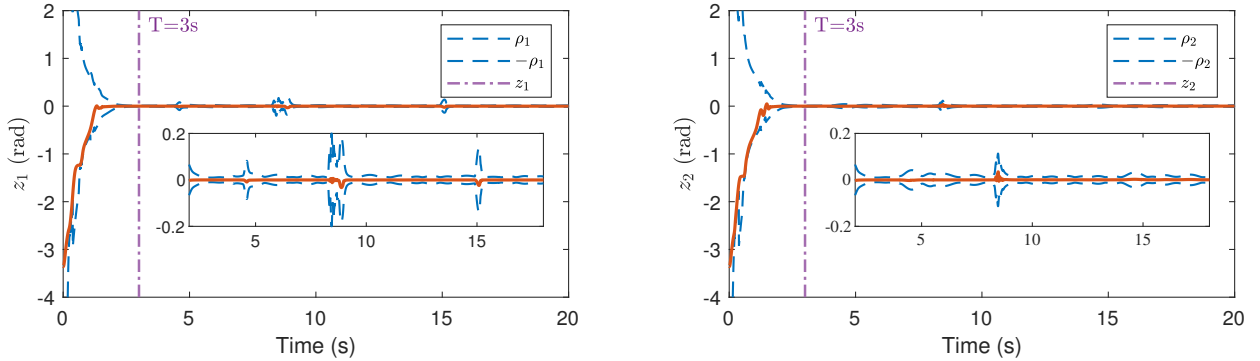


图 6 Control input torques under different initial value of $x_1(0)$.

Case 3: Comparison of algorithms

To comprehensively evaluate the proposed method, we compare four representative controllers: predefined-time control without performance constraints (PTC), prescribed-performance asymptotic stability control (PPC), fixed-time control (FTC, see [5]), and predefined-time control with prescribed-performance constraints (PTPPC). Our method (Proposed) combines a displacement-based performance shaping function, predefined-time regulation, and anti-saturation compensation. We fix $T_p = 2.5$ s and test two initial conditions: $x_1(0) = [\pi/2, \pi/2]^T$ (in-envelope error, figs. 7 to 9) and $x_1(0) = [-\pi/2, -\pi/2]^T$ (out-of-envelope error, figs. 11 to 13).

For the in-envelope error case (figs. 7 to 9), PPC yields smooth steady-state behavior but slow convergence; FTC converges faster yet shows irregular jumps and rebounds; PTC meets the time target but exhibits large initial fluctuations. PTPPC compresses the error within the prescribed bounds by T_p with relatively smooth inputs. Building on this, the Proposed controller—via the error-shift function and anti-saturation compensation—keeps

the error within the envelope throughout, achieves faster convergence, smoother actuation, and lower actuator effort, with no noticeable torque overshoot or chattering.

For the out-of-envelope error case (figs. 11 to 13), differences are amplified. PTC and FTC display pronounced oscillations and short-term divergence; FTC often drives torques to their limits for extended periods. PPC and PTPPC lack rapid correction for out-of-envelope initial errors, leaving the error outside the bounds and producing highly oscillatory inputs with limited regulation. In contrast, the Proposed method still legalizes the error and ensures stable convergence by T_p , with bounded and smooth inputs, demonstrating strong robustness and superior overall performance.

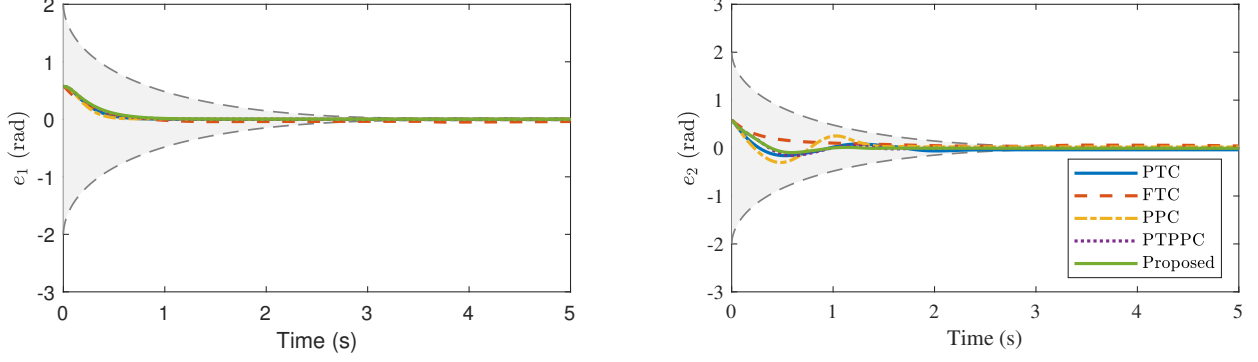


图 7 Comparison of position tracking errors under different methods with in-bound initial errors.

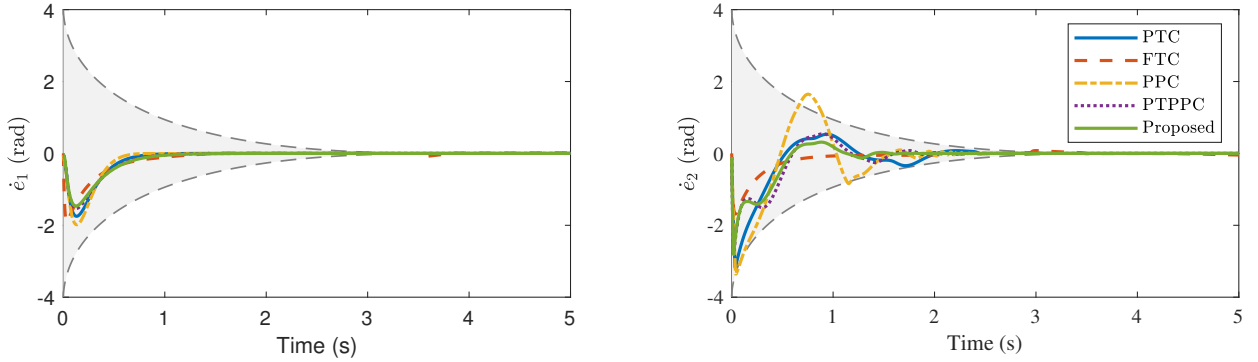


图 8 Comparison of velocity tracking errors under different methods with in-bound initial errors.

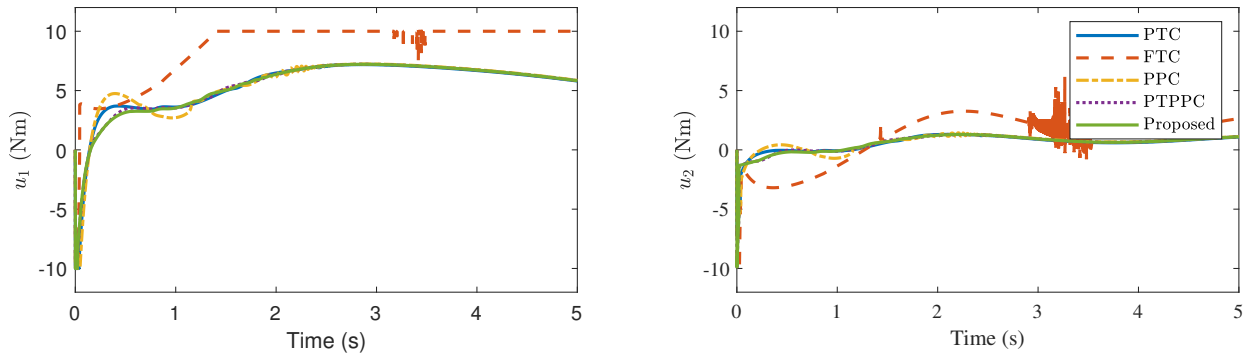


图 9 Comparison of control input torques under different Methods with in-bound initial errors.

6.2 Experiment

To further validate the effectiveness of the proposed method in real high DOF industrial robotic systems. A 6-DOF collaborative manipulator of JAKA C7 as shown in fig. 10 is selected as the controlled object to carry

out the trajectory tracking simulation experiments of six joints. The control objective is to enable each joint to track accurately along a set reference trajectory, while ensuring that all tracking errors converge within a specified predefined-time and always satisfy the given performance boundary constraints.

The parameters of prescribed performance function are set as $p = 0.6, \rho_1(0) = \pi/2, \rho_1(\infty) = 0.02, \rho_2(0) = \pi, \rho_2(\infty) = 0.02$. The predefined convergence time is set $T_p = 3$ s. The controller parameters are set as: $c = 0.6, \gamma = 0.4, \alpha_{\min} = -100, \alpha_{\max} = 100, \lambda = 2.5, \omega_{\min} = 2, \omega_{\max} = 6$. The control input is $u_{\min} = -u_{\max}, u_{\max} = [60; 60; 40; 30; 20; 15]$, $k_1 = \text{diag}(30, 30, 30, 24, 24, 30)$, $k_2 = \text{diag}(12, 10, 12, 10, 8, 8)$. The remaining parameters are set consistent with those in the simulation subsection. The desired joint trajectories are constructed to cover a range of frequency components and are defined as follows $q_d(t) = [0.1 \sin(0.5t) + \cos(0.5t), 0.1 \sin(t) + \cos(t), 0.2 \sin(1.5t) + 0.8 \cos(t), 0.3 \sin(2t) + 0.7 \cos(0.5t), 0.1 \sin(0.3t) + 0.9 \cos(0.2t), 0.4 \sin(t) + 0.6 \cos(2t)]$.

To validate the effectiveness of the proposed control method, we conduct comparative simulations on a representative 6-DOF manipulator model with four controllers: predefined-time control without performance constraints (PTC), prescribed-performance asymptotic stability control (PPC), predefined-time control with prescribed-performance constraints (PTPPC), and the proposed controller (Proposed). We fix the predefined-time at $T_p = 3$ s and specify jointwise performance envelopes $\rho_i(t)$. The initial values of the the manipulator are $x(0) = [\pi/2, -\pi/2, \pi/3, -\pi/3, \pi/2, -\pi/2]$ rad, $\dot{x}(0) = \mathbf{0}$ rad/s. Importantly, the initial errors of joints 2, 4, and 6 exceed their respective bounds, whereas joints 1, 3, and 5 start within the envelopes, yielding two distinct dynamics: (i) for joints 2/4/6, the controller must first drive the errors back inside the bounds before tracking; (ii) for joints 1/3/5, the errors decay directly under the prescribed performance. The transient responses across algorithms are presented side by side in ??????????.

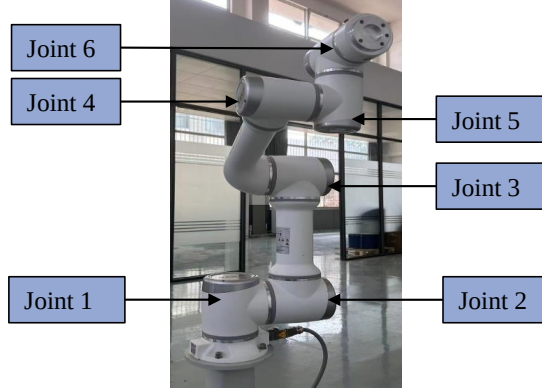


图 10 The 6-DOF collaborative manipulator of JAKA C7.

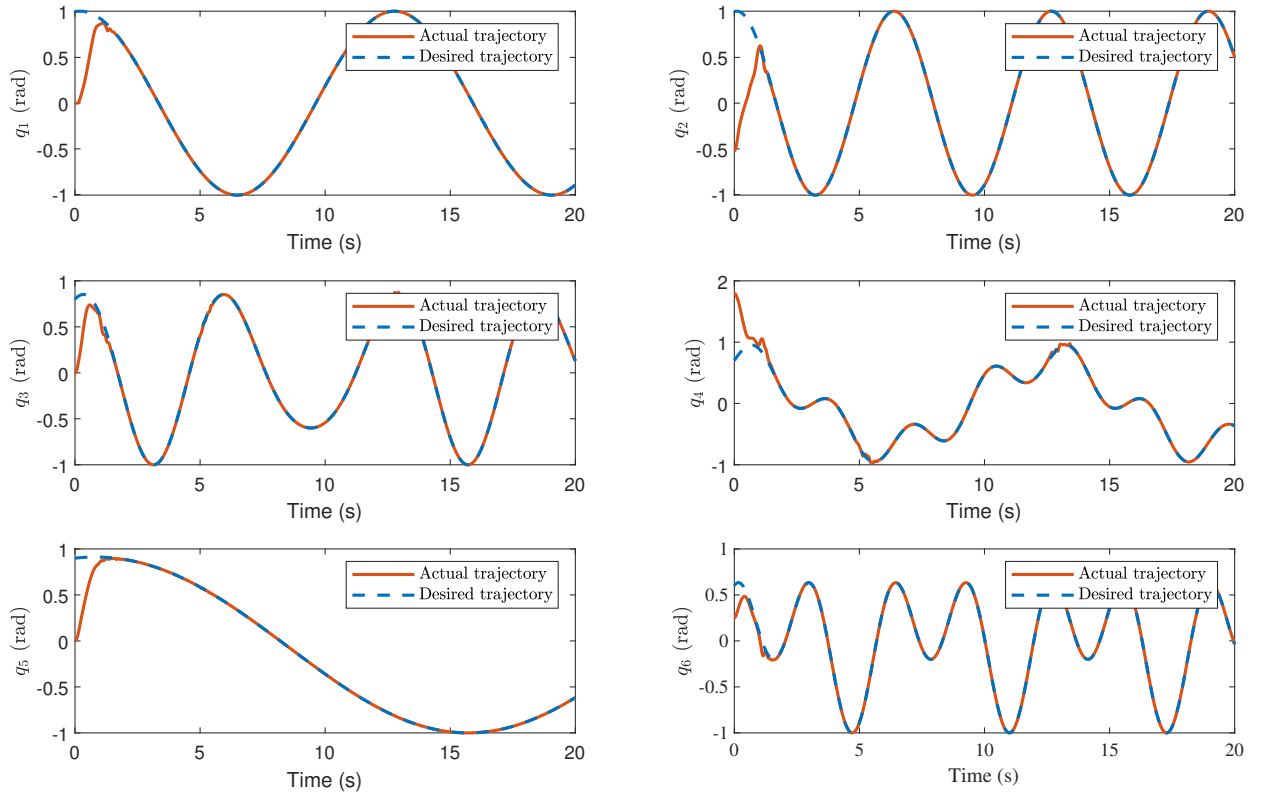


图 11 Comparison of position tracking errors under different methods with out-of-bound initial errors.

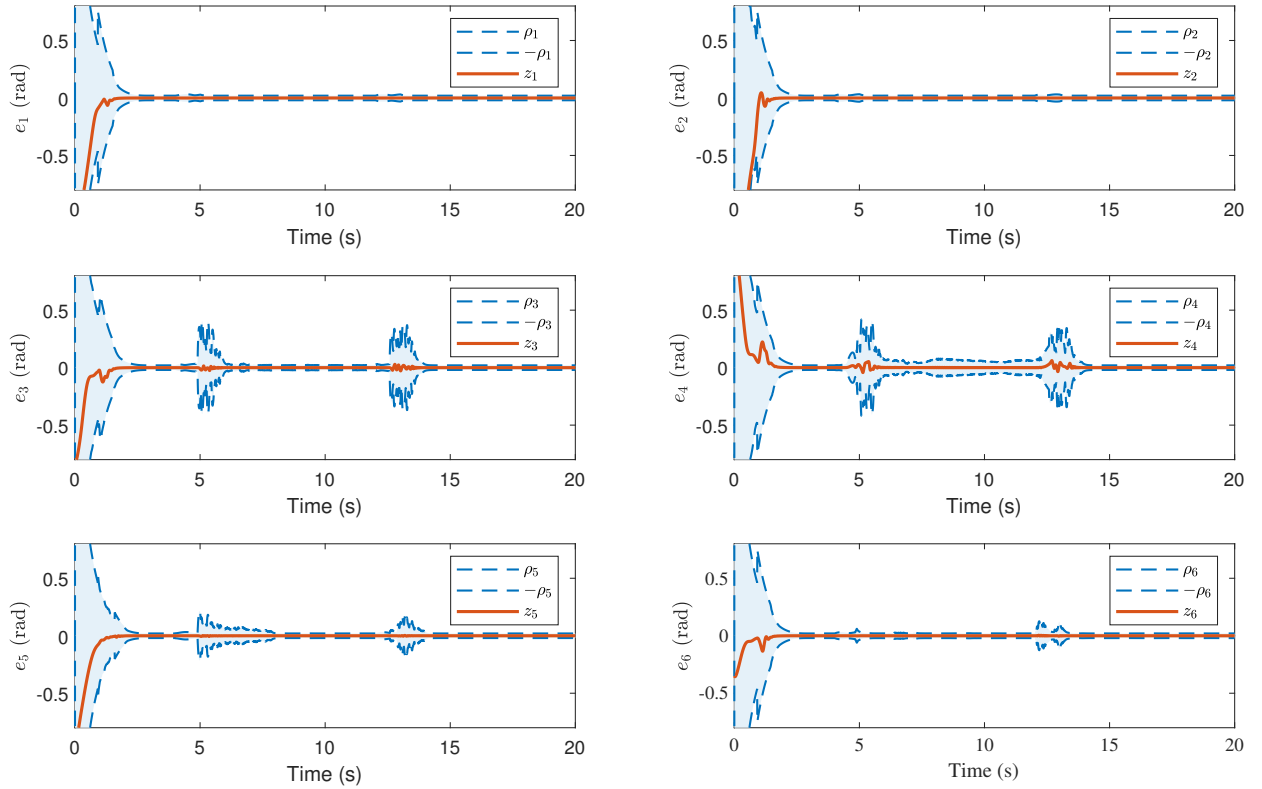


图 12 Comparison of velocity tracking errors under different methods with out-of-bound initial errors.

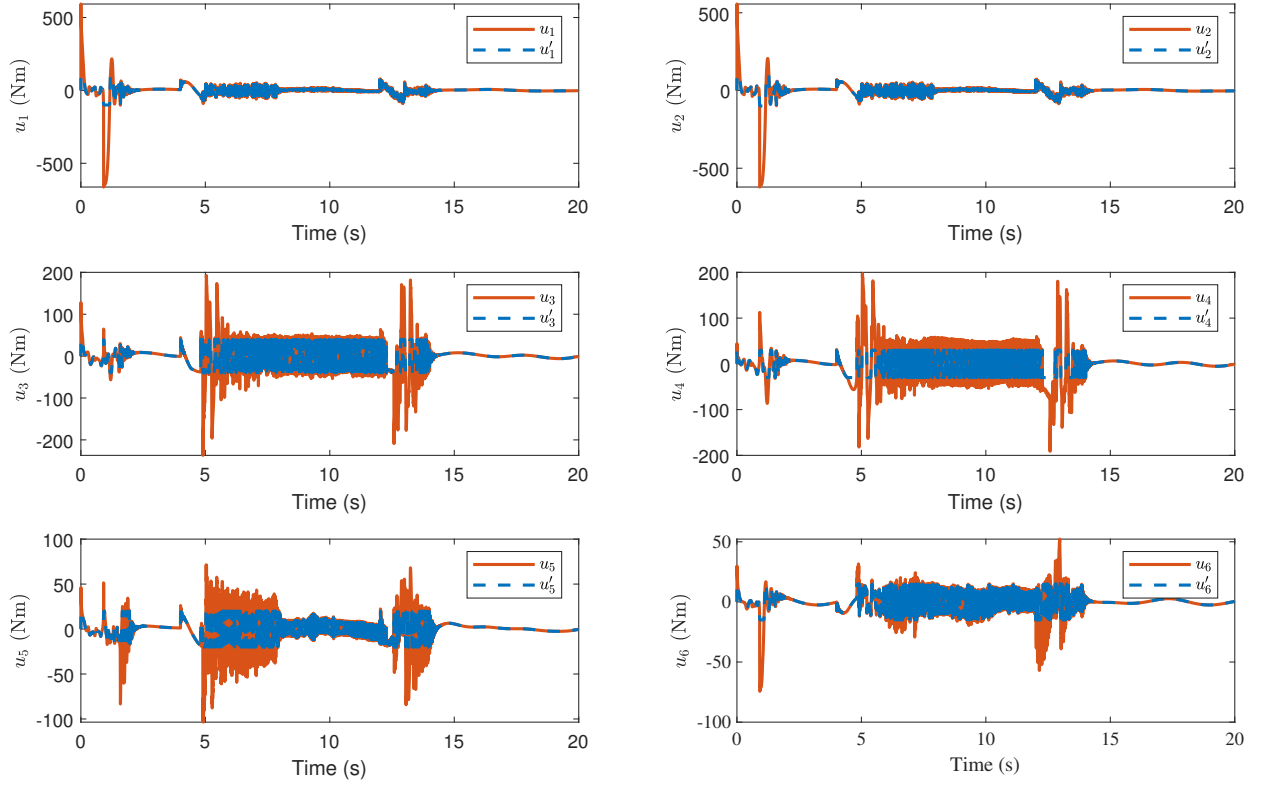


图 13 Comparison of control input torques under different Methods with out-of-bound initial errors.

As shown in ?????????, after a comprehensive comparison of the four controllers, both PTC and the Proposed method achieve convergence within $T_p = 3$ s. However, thanks to the added displacement-function modulation and anti-saturation compensation, the Proposed method shows virtually no overshoot and much smoother torques, yielding clearly superior transient and steady-state quality to PTC. PPC complies with the prescribed-performance framework but, lacking explicit time enforcement and saturation handling, exhibits large oscillations in position/velocity errors during 0–2 s, converges the slowest, and still leaves residual error after 3 s, thus failing the time requirement. PTPPC responds poorly to large out-of-envelope initial errors; in particular, the errors of joints 2, 4, and 6 remain outside the bounds and the legalization step is not completed. Overall, the Proposed controller surpasses PTC, PPC, and PTPPC in convergence speed, steady-state accuracy, chattering suppression, and actuator load. The coordinated design enforces the time–performance dual constraints and, via saturation compensation, reduces energy consumption and thermal load, making it suitable for high-DOF manipulators with large initial deviations under input limits.

References

- [1] Sciavicco, L., Siciliano, B.: Modelling and Control of Robot Manipulators. Springer, London (2012). <https://doi.org/10.1007/978-1-4471-0449-0>
- [2] Bagheri, M., Naseradinmousavi, P., Krstić, M.: Feedback linearization based predictor for time delay control of a high-dof robot manipulator. *Automatica* **108**, 108485 (2019-10) <https://doi.org/10.1016/j.automatica.2019.06.037>
- [3] Spong, M.W.: An historical perspective on the control of robotic manipulators. *Annual Review of Control, Robotics, and Autonomous Systems* **5**(1), 1–31 (2022-05-03) <https://doi.org/10.1146/annurev-control-042920-094829>

- [4] Wang, Q., Cao, J., Liu, H.: Adaptive fuzzy control of nonlinear systems with predefined time and accuracy. *IEEE Transactions on Fuzzy Systems* **30**(12), 5152–5165 (2022-12) <https://doi.org/10.1109/TFUZZ.2022.3169852>
- [5] Cao, S., Sun, L., Jiang, J., Zuo, Z.: Reinforcement learning-based fixed-time trajectory tracking control for uncertain robotic manipulators with input saturation. *IEEE Transactions on Neural Networks and Learning Systems* **34**(8), 4584–4595 (2023-08) <https://doi.org/10.1109/TNNLS.2021.3116713>

Statements and Declarations

Funding

This work is supported by the National Key Research and Development Program of China (2023YFC3008802), the National Natural Science Foundation of China (52075465), and the Key Products of Hunan Province's Manufacturing Industry "Unveiled and Leading" Project (2023GXGG018), the Project of Scientific Research Fund of the Hunan Provincial Science and Technology Department (2023JJ50021, 2023GK2029, No.2024JC1003, No.2024JJ1008, 2024JJ2051, 2023GK2026), "Algorithmic Research on Mathematical Common Fundamentals" Program for Science and Technology Innovative Research Team in Higher Educational Institutions of Hunan Province of China, the Hunan Provincial Department of Education Excellent Youth Program (23B0162).

Conflicts of Interest

The authors declare no conflict of interest.

Author contribution

Shuli Liu: Writing-Original Draft, Methodology, Software, Visualization, Data curation. Yi Liu: Resources, Investigation, Formal analysis, Conceptualization, Writing-Review & Editing. Jingang Liu: Project administration, Validation, Funding acquisition, Writing-Review & Editing. Yin Yang: Supervision, Funding acquisition, Writing-Review & Editing. All authors have reviewed and approved the final version of the manuscript.

Data Availability

The data that support the findings of this study are available from the corresponding author upon reasonable request.