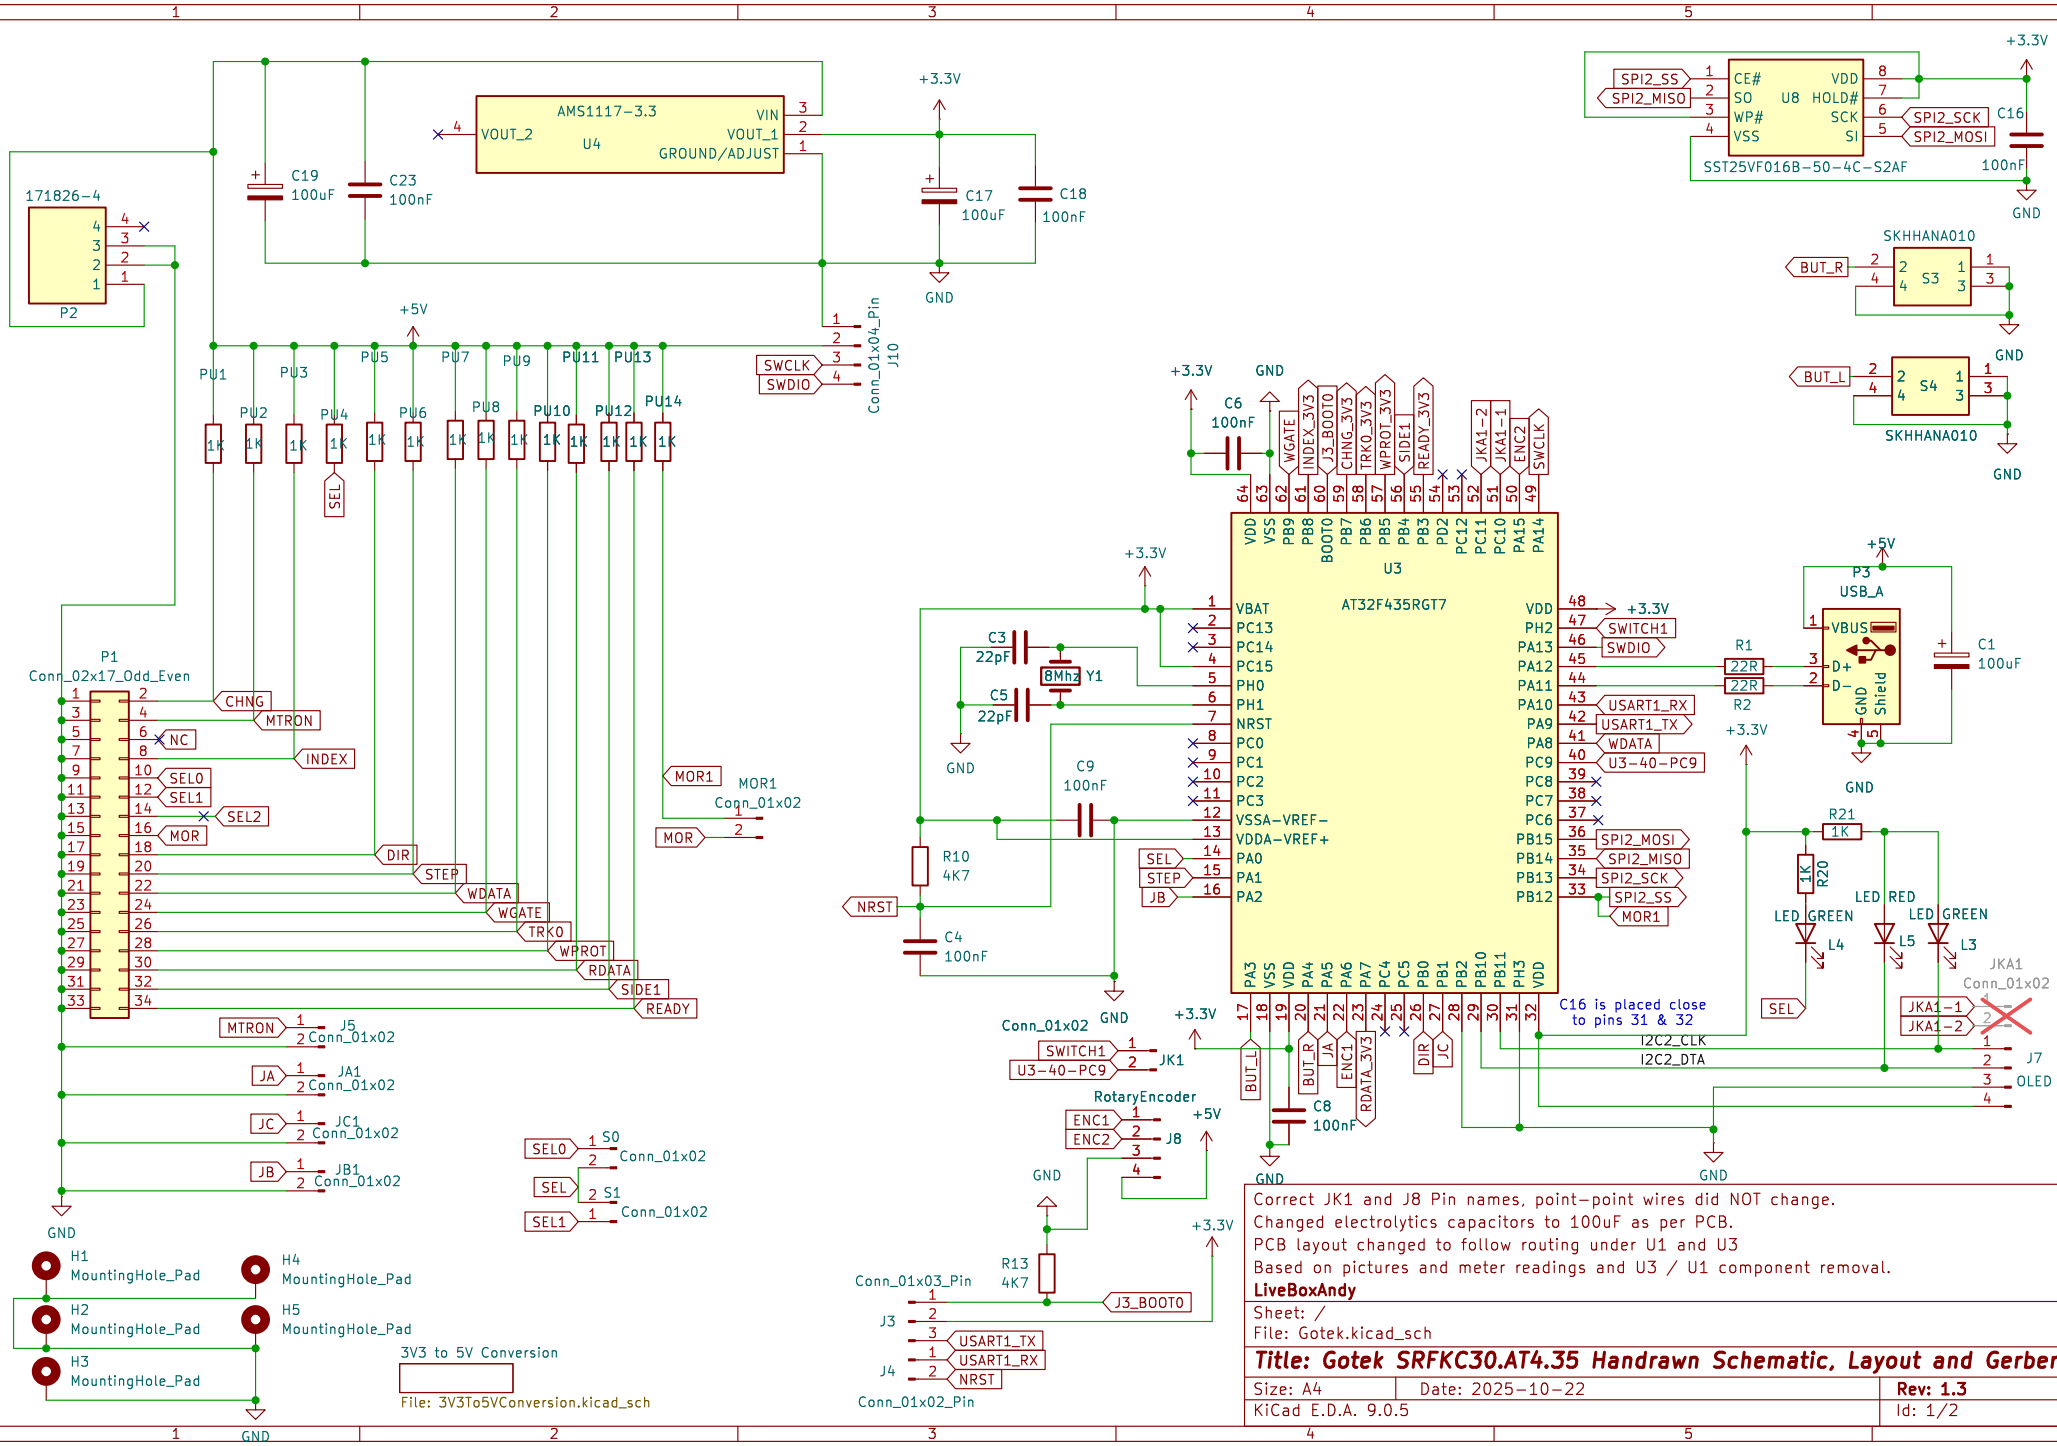
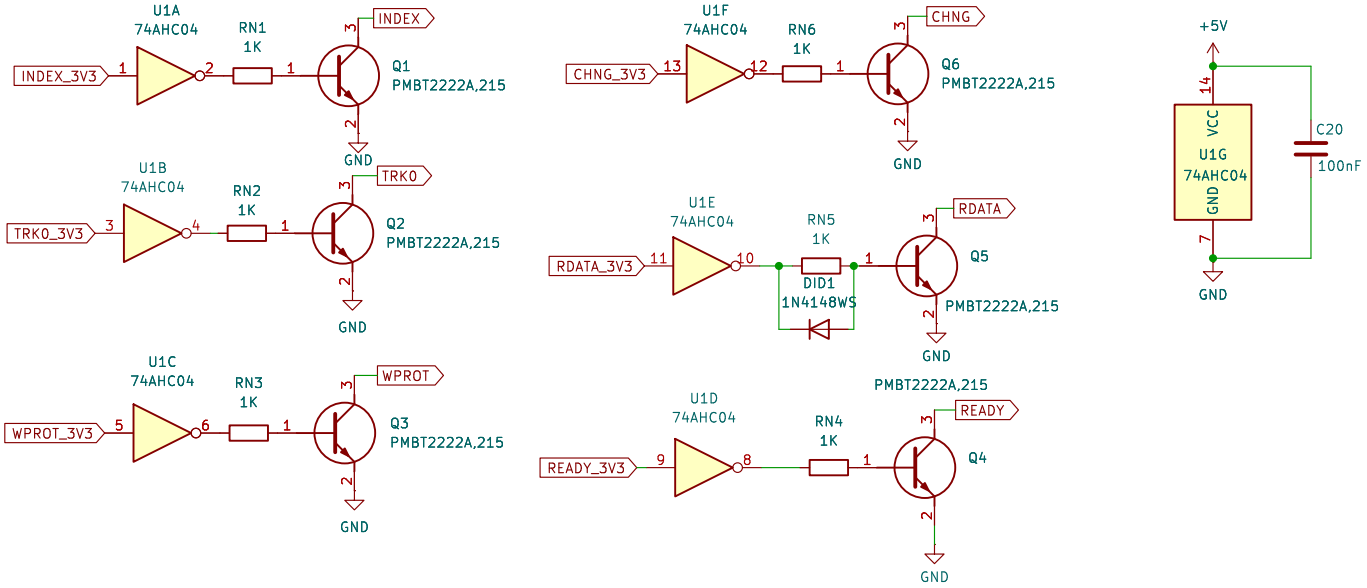

AMS1117-3.3
U4
VOUT_2
VIN
VOUT_1
GROUND/ADJUST
C19 100uF
C23 100nF
C17 100uF
C18 100nF
+3.3V
GND
171826-4
P2
+5V
PU1
PU2
PU3
PU4
PU5
PU6
PU7
PU8
PU9
PU10
PU11
PU12
PU13
PU14
1K
SEL
SWCLK
SWDIO
Conn_01x04_Pin
J10
P1
Conn_02x17_Odd_Even
CHNG
MTRON
NC
INDEX
SEL0
SEL1
SEL2
MOR
DIR
STEP
WDATA
WGATE
TRK0
WPROT
RDATA
SIDE1
READY
MOR1
Conn_01x02
J5
JA
JA1
JC
JC1
JB
JB1
SEL0
S0
SEL
S1
SEL1
H1 MountingHole_Pad
H2 MountingHole_Pad
H3 MountingHole_Pad
H4 MountingHole_Pad
H5 MountingHole_Pad
3V3 to 5V Conversion
File: 3V3To5VConversion.kicad_sch
SST25VF016B-50-4C-S2AF
U8
SPI2_SS
SPI2_MISO
SPI2_SCK
SPI2_MOSI
C16 100nF
SKHHANA010
BUT_R
BUT_L
S3
S4
U3
AT32F435RGT7
C6 100nF
C3 22pF
C5 22pF
8Mhz
Y1
C9 100nF
C4 100nF
R10 4K7
NRST
R1 22R
R2 22R
P3
USB_A
VBUS
D+
D-
GND
Shield
C1 100uF
R21 1K
R20 1K
LED GREEN
LED RED
LED GREEN
L4
L5
L3
JKA1
JKA1-1
JKA1-2
J7
OLED
I2C2_CLK
I2C2_DTA
C16 is placed close to pins 31 & 32
SWITCH1
U3-40-PC9
JK1
RotaryEncoder
ENC1
ENC2
J8
C8 100nF
R13 4K7
J3_BOOT0
Conn_01x03_Pin
J3
USART1_TX
USART1_RX
NRST
J4
Conn_01x02_Pin
Correct JK1 and J8 Pin names, point-point wires did NOT change.
Changed electrolytics capacitors to 100uF as per PCB.
PCB layout changed to follow routing under U1 and U3
Based on pictures and meter readings and U3 / U1 component removal.
LiveBoxAndy
Sheet: /
File: Gotek.kicad_sch
Title: Gotek SRFKC30.AT4.35 Handrawn Schematic, Layout and Gerbers
Size: A4
Date: 2025-10-22
Rev: 1.3
KiCad E.D.A. 9.0.5
Id: 1/2



Correct JK1 and J8 Pin names, point-point wires did NOT change.
Changed electrolytics capacitors to 100uF as per PCB.
PCB layout changed to follow routing under U1 and U3
Based on pictures and meter readings and U3 / U1 component removal.
LiveBoxAndy

Sheet: /3V3 to 5V Conversion/
File: 3V3To5VConversion.kicad_sch

Title: Gotek SRFKC30.AT4.35 Handrawn Schematic, Layout and Gerbers

Size: A4	Date: 2025-10-22	**Rev: 1.3**
KiCad E.D.A. 9.0.5		Id: 2/2