





TRIMETRIC VIEW

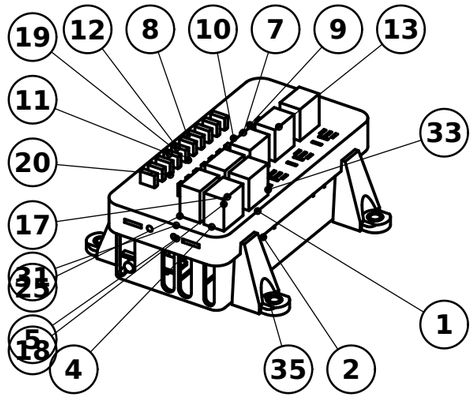

TRIMETRIC - COVER REMOVED



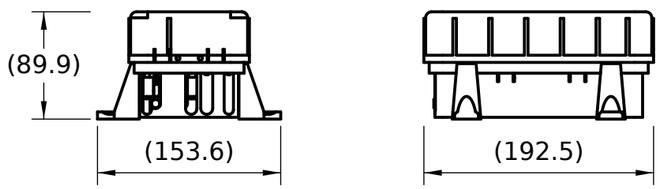

FRONT / TOP / RIGHT VIEWS SCALE 1:5

REVISIONS

REV	DESCRIPTION	BY	DATE
N	#272: FB-115 / -116 strips C	Claude	16/10/26
P	#273: FB-105 base M, FB-106 pan F, FB-107 cover H, FB-115 / -116 strips D	Claude	16/10/26
R	#275: FB-105 base N	Claude	17/10/26
S	#297: FB-105 base P, FB-106 pan G, FB-107 cover J, FB-115 / -116 strips E	Claude	18/10/26
T	#303: FB-105 base R, FB-106 pan H, FB-107 cover K	Claude	18/10/26
U	#308: FB-105 base S; first assembly drawing (buildability review 18/10/26)	Claude	18/10/26

ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL / SPEC
1	1	ST185-FB-105	LOGIC BASE	PA12, 3D PRINTED
2	1	ST185-FB-106	LOGIC PAN (BELLY PAN)	PA12, 3D PRINTED
3	1	ST185-FB-107	LOGIC COVER	PA12, 3D PRINTED
4	1	ST185-FB-115/-116	LOGIC BUS STRIPS BUS1 + BUS2	C110 Cu, TINNED
5	19	PEM S-M4-2ZI	SELF-CLINCHING NUT M4, PRESSED INTO THE STRIP	C110 Cu, TINNED
6	2	PEM SS-M5-2ZI	SELF-CLINCHING NUT M5, PRESSED INTO THE STRIP	C110 Cu, TINNED
7	4	ATM-2	MINI BLADE FUSE 2 A (ATM)	PURCHASED
8	3	ATM-5	MINI BLADE FUSE 5 A (ATM)	PURCHASED
9	4	ATM-7-1/2	MINI BLADE FUSE 7.5 A (ATM)	PURCHASED
10	2	ATM-10	MINI BLADE FUSE 10 A (ATM)	PURCHASED
11	7	ATM-15	MINI BLADE FUSE 15 A (ATM)	PURCHASED
12	1	ATM-20	MINI BLADE FUSE 20 A (ATM)	PURCHASED
13	1	4-1904124-2	MICRO RELAY (ALL 7 POSITIONS)	PURCHASED
14	1	4-1904124-3	MICRO RELAY: HORN (SEE NOTE 2) (NOT SHOWN)	PURCHASED
15	2	5-1393292-8	MICRO RELAY: HEAD LH, HEAD RH (SEE NOTE 2) (NOT SHOWN)	PURCHASED
16	3	6-1419137-4	MICRO RELAY: K_ACC, K_EPS_EN, K_REV (SEE NOTE 2) (NOT SHOWN)	PURCHASED
17	14	280919-2	MICRO RELAY COIL RECEPTACLE 4.8 X 0.8	PURCHASED
18	17	42281-1	MICRO RELAY LOAD RECEPTACLE 6.3 X 0.8	PURCHASED
19	22	1-968849-1	MINI FUSE RECEPTACLE MCP 2.8, 20 / 18 AWG	PURCHASED
20	20	1-968851-1	MINI FUSE RECEPTACLE MCP 2.8, 16 / 14 AWG	PURCHASED
21	1	RNF-100-1/8-0-STK	INSULATION BUILD-UP SLEEVE 1/8 (NOT SHOWN)	PURCHASED
22	1	RNF-100-3/32-0-STK	INSULATION BUILD-UP SLEEVE 3/32 (NOT SHOWN)	PURCHASED
23	4	94459A140	M3 HEAT-SET INSERT (OPTIONAL COVER BACKUP) (NOT SHOWN)	BRASS
24	4	SSCF-M3-10-A4	M3 x 10 CAP SCREW (OPTIONAL COVER BACKUP) (NOT SHOWN)	A4 STAINLESS
25	11	320554	INPUT JUMPER RING LUG, 22-16 AWG, #8 / M4	Cu, TINNED
26	8	53941-1	INPUT JUMPER RING LUG, 16-14 AWG, #8 / M (SEE NOTE 2) (NOT SHOWN)	Cu, TINNED
27	1	M22759/16-14-2	INPUT JUMPER WIRE 14 AWG, ~60 MM EACH	PURCHASED
28	1	M22759/16-16-2	INPUT JUMPER WIRE 16 AWG, ~60 MM EACH (SEE NOTE 2) (NOT SHOWN)	PURCHASED
29	1	M22759/16-18-2	INPUT JUMPER WIRE 18 AWG, ~60 MM EACH (SEE NOTE 2) (NOT SHOWN)	PURCHASED
30	1	M22759/16-20-2	INPUT JUMPER WIRE 20 AWG, ~60 MM EACH (SEE NOTE 2) (NOT SHOWN)	PURCHASED
31	19	RS 287-3915	HEX BOLT M4 X 8, INTO THE PEM NUT IN THE STRIP	A2 STAINLESS
32	19	RS 231-0691	SPRING WASHER M4 UNDER EACH JUMPER BOLT HEAD	A2 STAINLESS
33	2	Klauke 2R5	TUBULAR LUG 10 MM2, M5 HOLE	Cu, TINNED
34	2	RS 287-3921	HEX BOLT M5 X 10, FEED LUG INTO THE PEM SS-M5...	A2 STAINLESS
35	4	EFC 10S00056	COMPRESSION LIMITER, FEET (4)	STEEL, ZINC

NOTES:

1. OVERALL DIMENSIONS ONLY (REFERENCE). ITEMS MARKED (NOT SHOWN) ARE NOT MODELED; WIRES/HARNESS OMITTED FOR CLARITY.
2. RELAY / LUG / WIRE ITEMS THAT SHARE ONE MODEL BODY ARE BALLOONED ON THE FIRST ITEM OF THE GROUP (ALL 7 MICRO RELAYS SHARE ONE ENVELOPE).
3. THE M5 x 10 FEED BOLT TIP RUNS 1.7 INTO THE SPINE: IT IS THE LENGTHWISE LOCK OF EACH STRIP - USE x 10, NOT SHORTER.
4. TERMINALS GO UP FROM UNDER THE DECK, CONTACT BOX FIRST, UNTIL THE LANCE CLICKS; PULL THE WIRE BACK LIGHTLY TO CHECK (TE 114-2025 3.6, 114-20021 3.7).
5. DO NOT TIE THE HARNESS CLOSER THAN 38 mm TO THE DECK UNDERSIDE, AND DO NOT DRESS WIRES SHARPLY TO ONE SIDE (TE 114-20021 3.7 C).

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
BREAK SHARP EDGES 0.2-0.4
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
LOGIC FUSE BOX - ASSEMBLY

PART / DWG NO.	REV	MATERIAL
ST185-FB-100L	U	SEE BOM


SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:5	mm	B (11x17)	1 OF 2	2026-10-18	SteveCAD

SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev7\\ST185_fusebox_rev7_assembly.step

3RD ANGLE


STEP 1: LIMITERS; STRIPS SLID IN FROM THE REAR

EXPLODED TRIMETRIC (NOT TO SCALE)




STEP 2: TERMINALS UP INTO THE CAVITIES

EXPLODED TRIMETRIC (NOT TO SCALE)




STEP 3: FEED LUGS (NOTE 3) + JUMPERS

EXPLODED TRIMETRIC (NOT TO SCALE)




STEP 4: FUSES + RELAYS

EXPLODED TRIMETRIC (NOT TO SCALE)



STEP 5: BELLY PAN + COVER

EXPLODED TRIMETRIC (NOT TO SCALE)



UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
BREAK SHARP EDGES 0.2-0.4
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
LOGIC FUSE BOX - ASSEMBLY

PART / DWG NO.	REV	MATERIAL
ST185-FB-100L	**U**	SEE BOM

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
AS SHOWN	mm	B (11x17)	2 OF 2	2026-10-18	SteveCAD

SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev7\\ST185_fusebox_rev7_assembly.step

3RD ANGLE