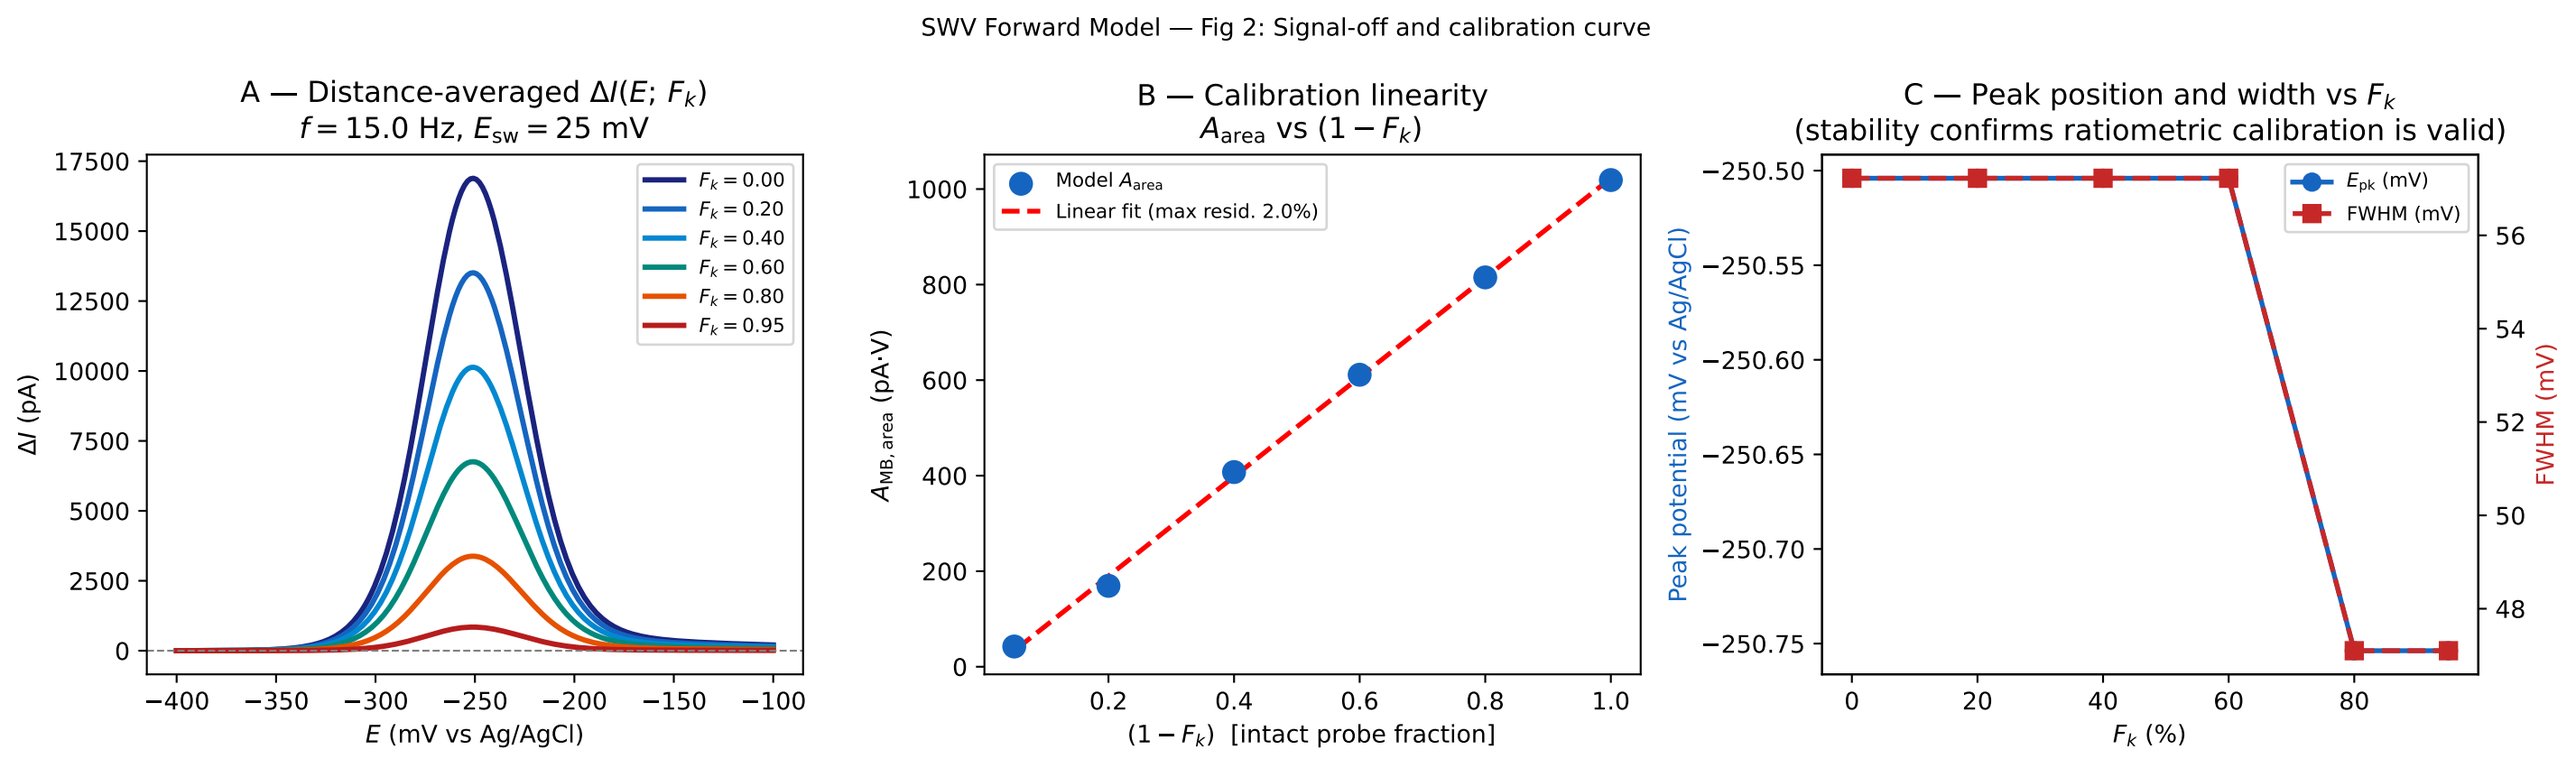
SWV Forward Model — Fig 2: Signal-off and calibration curve
A — Distance-averaged ΔI(E; F_k)
f = 15.0 Hz, E_sw = 25 mV
ΔI (pA)
E (mV vs Ag/AgCl)
F_k = 0.00
F_k = 0.20
F_k = 0.40
F_k = 0.60
F_k = 0.80
F_k = 0.95
B — Calibration linearity
A_area vs (1 − F_k)
A_MB, area (pA·V)
(1 − F_k) [intact probe fraction]
Model A_area
Linear fit (max resid. 2.0%)
C — Peak position and width vs F_k
(stability confirms ratiometric calibration is valid)
Peak potential (mV vs Ag/AgCl)
FWHM (mV)
F_k (%)
E_pk (mV)
FWHM (mV)