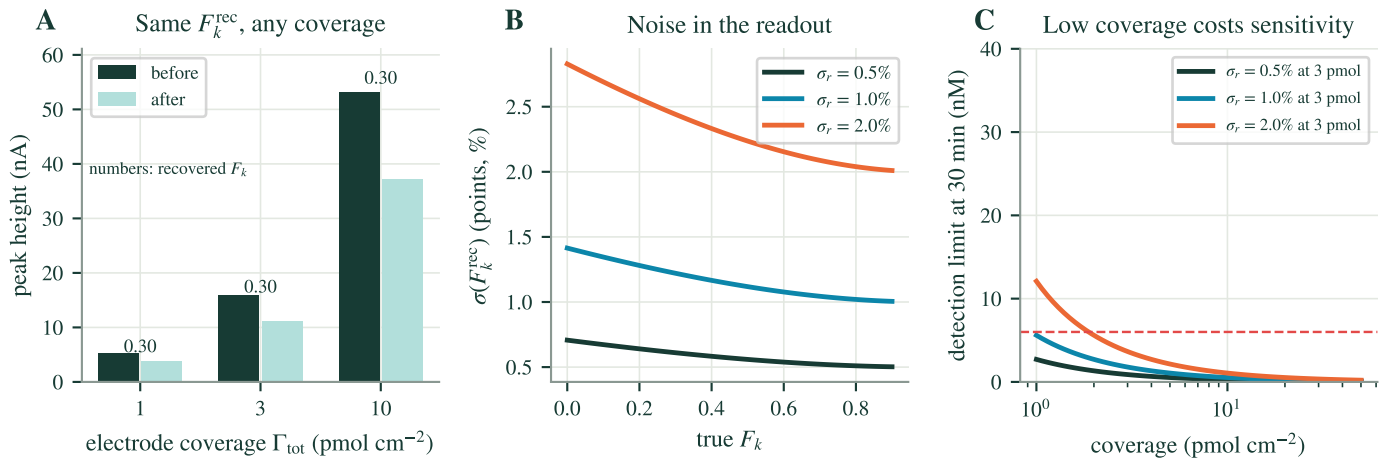
A
Same F_k^{rec}, any coverage
before
after
numbers: recovered F_k
0.30
0.30
0.30
peak height (nA)
electrode coverage Γ_{tot} (pmol cm^{-2})
B
Noise in the readout
σ_r = 0.5%
σ_r = 1.0%
σ_r = 2.0%
$\sigma(F_k^{\mathrm{rec}})$ (points, %)
true F_k
C
Low coverage costs sensitivity
σ_r = 0.5% at 3 pmol
σ_r = 1.0% at 3 pmol
σ_r = 2.0% at 3 pmol
detection limit at 30 min (nM)
coverage (pmol cm^{-2})