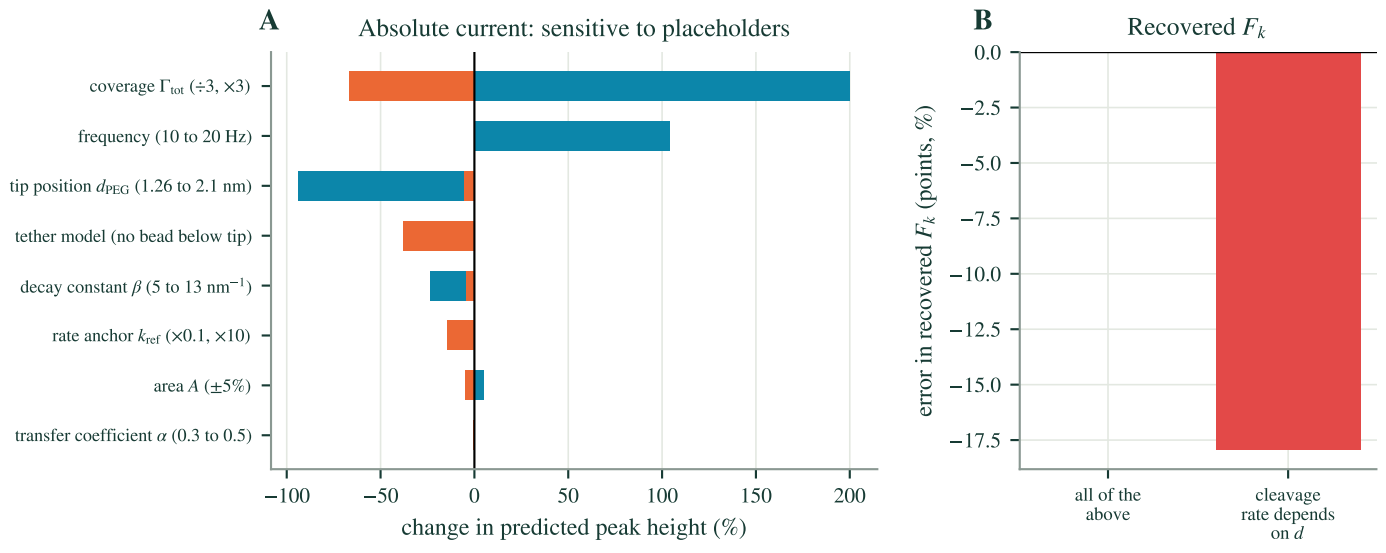
A
Absolute current: sensitive to placeholders
coverage Γ_{tot} (÷3, ×3)
frequency (10 to 20 Hz)
tip position d_{PEG} (1.26 to 2.1 nm)
tether model (no bead below tip)
decay constant β (5 to 13 nm^{-1})
rate anchor k_{ref} (×0.1, ×10)
area A (±5%)
transfer coefficient α (0.3 to 0.5)
−100
−50
0
50
100
150
200
change in predicted peak height (%)
B
Recovered F_k
error in recovered F_k (points, %)
0.0
−2.5
−5.0
−7.5
−10.0
−12.5
−15.0
−17.5
all of the above
cleavage rate depends on d