

Structural LQI–PIDF equivalence and constrained weight tuning for a wide-range Buck converter

Anonymous author(s)

Affiliation withheld for review

Abstract

Metaheuristic tuning of PID-type controllers for power converters usually searches gain spaces that carry no stability guarantee, and its results are rarely checked against switching effects. This paper shows that, for a non-ideal Buck converter, the linear–quadratic–integral (LQI) law has an exact realization as a two-degree-of-freedom PIDF that measures only the output voltage. When its derivative pole is placed on the capacitor ESR zero, the filter state reconstructs the capacitor voltage along every trajectory. The PIDF and the full-state LQI therefore coincide under saturation, anti-windup and discontinuous conduction. They differ only through an explicit output-current term, output-network mismatch and sampling, and a first-order-hold discretization reduces the sampling gap by a factor of about 40. The controller is tuned by searching the LQI weights, not the gains, so every candidate is LQ-optimal and carries guaranteed margins and a certified pole region. A constrained, multi-fidelity search includes short switched-model simulations to reject coexisting switching limit cycles that averaged models miss. On a 48 V converter commanded from 1 to 46 V, six metaheuristics converge to the same optimum. An unconstrained gain search reaches the same controller, but 42 % of its feasible solutions are not LQ-optimal. On a switched replica of the reference Simulink model, the tuned controller eliminates overshoot and respects the device current rating, whereas standard PI, PID, PIDF, LQR, LQG and LQI designs exceed the specification by factors of 6 to 30.

Keywords: Buck converter, LQI control, 2-DOF PIDF, structural equivalence, metaheuristic optimization, multi-fidelity constraints, switching limit cycles

1. Introduction

Most DC–DC converters in industrial equipment are still closed by a PID-type loop. The reason is practical: a PID block is available in every digital controller, technicians know how to read its three gains, and it needs a single voltage sensor. Model-based laws such as the linear–quadratic regulator are better understood mathematically, but they ask for more sensors and their tuning knobs, the weights of a quadratic cost, have no obvious meaning on the shop floor. ISA Transactions addresses the engineering of measurement and automation for practitioners and applied researchers, and this gap between what theory certifies and what industry implements is the subject of this paper. We study one converter in detail, a non-ideal asynchronous Buck stage fed from 48 V and commanded from 1 V to 46 V, and ask a precise question: can a controller be tuned in the coordinates of optimal control and still be delivered to the plant as an ordinary PID with a derivative filter, without losing the optimality certificate on the way?

The answer turns out to be yes, and exactly so, under conditions that we state and test. The rest of this section reviews how PID-type and linear–quadratic controllers reached their present form, why the non-ideal Buck is a demanding test case, and why metaheuristics and Bayesian optimization are used here. It then states the research gap, the working assumptions, the difficulties and the contributions.

1.1. Literature review

1.1.1. From the three-term controller to the 2-DOF PIDF

The three-term law was first analysed by Minorsky [45] for the automatic steering of ships, and the rules published by Ziegler and Nichols [70] made it an industrial standard. Each term was added to cure a defect of the previous structure. A proportional controller leaves a steady error under a constant load; the integral term removes it, giving the PI controller; the derivative term adds phase lead and damping, giving the PID [6]. A pure derivative is not realizable and amplifies measurement noise, so every practical PID filters it with a first-order pole N ; the result is the PIDF, the form found in industrial controllers and in the Simulink PID block [4, 6].

A single-loop PIDF still ties two things together: the response to a disturbance and the response to a setpoint change. With one set of gains, a loop tuned for fast load rejection overshoots on reference steps. Setpoint weighting separates the two. The proportional and derivative terms act on

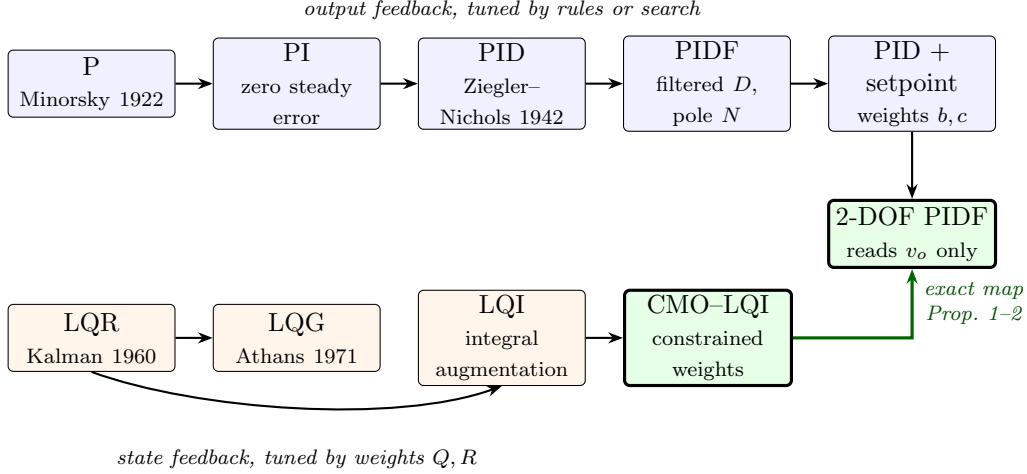


Figure 1: Evolution of the two controller families used in this paper. Upper branch: output-feedback PID-type laws, from the proportional controller to the 2-DOF PIDF. Lower branch: linear-quadratic state feedback, from LQR to LQI and to the constrained weight tuning (CMO-LQI) proposed here. The two branches meet through the exact realization of Propositions 1 and 2.

37 $br - y$ and $cr - y$ instead of $r - y$, while the integral keeps acting on the
 38 true error so that the steady state is unchanged [6, 5]; the idea has been
 39 extended to multivariable PID loops [9]. This is a particular case of the two-
 40 degree-of-freedom (2-DOF) structure introduced by Horowitz [27], in which
 41 the feedback path fixes robustness and disturbance rejection and a separate
 42 path shapes the command response. The 2-DOF PIDF, with its six pa-
 43 rameters (K_p, K_i, K_d, N, b, c), is the most complete PID-type law offered by
 44 standard automation hardware, and it is the end point of the upper branch of
 45 Fig. 1. Surveys of PID practice document both the dominance of this family
 46 in industrial loops and the very large number of tuning methods proposed for
 47 it, a sign that tuning, more than structure, is where the difficulty lies [5, 4].

48 1.1.2. From LQR to LQI

49 The lower branch of Fig. 1 starts with Kalman [32], who posed the regu-
 50 lation of a linear system as the minimization of a quadratic cost and showed
 51 that its solution is a constant state feedback computed from a Riccati equa-
 52 tion. The LQR comes with a certificate that no PID tuning rule offers: for
 53 a single input, the return difference satisfies $|1 + L(j\omega)| \geq 1$, which gives an
 54 infinite upward gain margin, a gain reduction margin of one half and at least

60° of phase margin [33, 57, 3].

The certificate assumes that every state is measured. When the states are estimated by a Kalman filter, the controller becomes the LQG law [8], and Doyle [19] showed with a counter-example that LQG loops can have arbitrarily small margins; loop-transfer recovery restores them only at the cost of observer bandwidth [20]. The second limitation of the LQR is that a proportional state feedback does not remove the steady error caused by a constant load or by a model error. The servomechanism theory of Young and Willems [69] and Davison [15], grounded on the internal model principle of Francis and Wonham [23], solves this by adding the integral of the tracking error to the state vector and solving the LQR for the augmented plant. This linear-quadratic-integral (LQI) law is what the rest of the paper uses.

Several variants of the LQI have been applied to converters. The weights have been chosen by Bryson’s rule [11], by hand, or by an optimizer; robust versions replace the Riccati equation by linear matrix inequalities that hold over a polytope of operating points [51], and closed-loop poles can be confined to a prescribed region by the same means [13]; early work already cast converter regulation as a general LQR problem [40]. Saturation of the duty ratio requires an anti-windup mechanism, for which Kothare et al. [38] gave a unified framework and back-calculation remains the usual industrial choice [7]. Other families exist and are strong on converters, for instance sliding-mode control [66], hybrid model predictive control [25, 41], and observer-based or intelligent nonlinear laws [1, 61, 10], but they give up either the fixed switching frequency or the low-order linear structure that a PID block can host. The LQI is chosen here for three reasons that are specific to the Buck: the averaged plant is second order, so the augmented state has dimension three and the Riccati solution is cheap enough to be computed inside an optimizer; the integral state gives zero steady error across a range in which the equilibrium duty moves from 0.03 to 0.97; and, as shown in Section 3, the capacitor ESR places a zero in the output equation that makes the LQI exactly realizable from the output voltage.

1.1.3. *Why a non-ideal Buck converter*

The Buck converter is often used as a benchmark because its ideal averaged model is linear in the states and bilinear in the duty ratio [44, 21]. That ideal model is misleading for the question asked here. The ESR r_C is the element that creates the output-network zero on which the exact equivalence rests, so it cannot be neglected. The winding resistance r_L , the switch resis-

92 tance R_{on} , the diode drop V_f and its resistance r_d shift the equilibrium duty
 93 and the dissipated power; at 1 V, where the modelled efficiency falls to about
 94 61 %, they dominate the energy balance [36, 60]. With an asynchronous diode
 95 the inductor current cannot reverse, so light loads and deep step-downs drive
 96 the converter into discontinuous conduction, where the small-signal model
 97 changes order [65]. Averaging itself is an approximation whose validity de-
 98 pends on the ripple and the switching frequency [39, 42], and in digital loops
 99 the sampled ripple and the duty resolution can sustain limit cycles that no
 100 averaged model predicts [53, 52, 12]. A wide-range, non-ideal Buck therefore
 101 combines saturation, a mode change and switching nonlinearities in a plant
 102 that is still simple enough to analyse in closed form, which makes it a fair
 103 test of any claim of equivalence.

104 1.1.4. *Why seek a PID equivalent, and why the 2-DOF PIDF*

105 If the LQI is better founded, one may ask why it should be converted into
 106 a PID at all. The first reason is implementation: an LQI needs the inductor
 107 current, which requires a current sensor with its bandwidth, cost and noise,
 108 whereas the output voltage is always measured. The second is acceptance:
 109 commissioning engineers can inspect, bound and retune three gains, and the
 110 PID block brings validated anti-windup and bumpless transfer with it [6].
 111 The third is methodological. Tuning a PID directly in gain space, whether
 112 by rules or by an optimizer, gives no stability or robustness guarantee for
 113 the resulting point [4]. An exact map from the LQI to a PID-type law turns
 114 every candidate of a search into a controller that has the LQR margins and,
 115 at the same time, runs on a standard block.

116 The map requires the extra degrees of freedom of the 2-DOF PIDF. The
 117 LQI feeds back the capacitor voltage and the inductor current; replacing
 118 them by the measured output needs a filtered derivative whose pole matches
 119 the ESR zero, which is the N of the PIDF. The LQI also acts on the reference
 120 only through the integral state, so the equivalent PIDF must have $b = 1$ and
 121 $c = 0$: without setpoint weights, a PIDF can reproduce the disturbance
 122 response of the LQI but not its command response (Proposition 1). A PI or
 123 a PID has too few parameters for either condition, which is why they appear
 124 in this study only as comparators.

125 1.1.5. *CMO-LQI: constrained multi-criteria optimization of the LQI weights*

126 Bryson’s rule gives a sensible starting point, but the weights it produces
 127 are not optimal with respect to overshoot, device current or loss, which are

128 what a specification actually lists. We call CMO-LQI (constrained multi-
129 criteria optimization of the LQI) the problem of choosing the weights so
130 that the resulting LQI, realized as a 2-DOF PIDF, minimizes an aggregate
131 of seven performance criteria over six scenarios subject to hard engineering
132 constraints. The word *multi-criteria* is meant literally and not in the Pareto
133 sense: the criteria are normalized and averaged into one scalar, and the
134 constraints are handled by feasibility rules [16]. A weighted scalar index
135 does not describe a trade-off front [56], and we do not claim one. The search
136 variables are the logarithms of the Bryson excursions and of the integral
137 bandwidth, four numbers with a physical scale, rather than the PIDF gains.

138 1.1.6. *Why metaheuristics, and why refineBO*

139 The CMO-LQI problem is small, four variables, but its objective and
140 its constraints are obtained from simulations with saturation, mode changes
141 and switching, so no gradient is available and the feasible set may be discon-
142 nected. Population-based metaheuristics are the usual answer to such black-
143 box problems, and they have been applied widely to converter controllers
144 [30, 48, 59, 67]. Two warnings from the optimization literature shape the
145 way we use them. The no-free-lunch theorems state that no algorithm dom-
146 inates on all problems [68], and metaphor-based variants are often presented
147 without evidence that they differ from existing methods [63]. We therefore
148 do not propose a new metaheuristic. We take three classical operators with
149 well-documented behaviour, particle swarm optimization [37, 54], the genetic
150 algorithm [26] and the artificial bee colony [34, 35], and three recent variants
151 built on the grey wolf optimizer and on an adaptive bee colony [46, 47, 28, 2],
152 and ask whether the answer depends on the operator. Constraints are han-
153 dled by Deb’s feasibility ordering, which avoids penalty factors [16, 43], and
154 the runs are compared on matched seeds with non-parametric tests [18, 17].

155 A global operator spends most of its budget exploring. Once a promis-
156 ing region is found, a local model-based stage is more economical, which is
157 the idea of memetic and hybrid schemes [49]. For expensive black-box func-
158 tions, Bayesian optimization fits a Gaussian-process surrogate to the evalu-
159 ated points and chooses the next one by maximizing an acquisition function
160 such as the expected improvement [31, 55, 62, 58]. Unknown constraints
161 are handled by multiplying the acquisition by the modelled probability of
162 feasibility [24], and a trust region keeps the surrogate local and reliable [22].
163 Bayesian optimization has already been used to tune industrial controllers
164 [50] and digital PID loops [14]. The refineBO stage used here combines

Table 1: Controllers used in this study.

Controller	Measured signals	Tuning parameters	Certificate	Role here	Key references
PI	v_o	K_p, K_i	none	comparator	Ziegler and Nichols [70]
PID	v_o	K_p, K_i, K_d	none	comparator	Åström and Hägglund [6]
PIDF	v_o	K_p, K_i, K_d, N	none	comparator	Ang et al. [4]
2-DOF PIDF	v_o	K_p, K_i, K_d, N, b, c	none if tuned directly	realization of the proposal	Horowitz [27]
LQR	i_L, v_o	Q, R	LQ margins	comparator	Kalman [32]
LQG	v_o (+ observer)	Q, R , noise covariances	none	comparator	Athans [8]
LQI	i_L, v_o	Q, R	LQ margins, zero steady error	comparator	Young and Willems [69]
CMO-LQI-PIDF	v_o	4 log-excursions	LQ margins, D-region	proposal	this work

Table 2: Positioning with respect to representative Buck control and tuning studies. “Not reported” refers to the stated scope of each work only.

Study	Plant evidence	Controller / search	Relative to the present question
Siddhartha et al. [60]	non-ideal Buck, dSPACE	IMC-PID, direct	no repeated solver comparison, no switched energy audit
Izci et al. [30]	averaged Buck	PID, AEO + Nelder-Mead	gain-space search, no structural certificate, no switched admissibility
Nanyan et al. [48]	averaged Buck	PID, improved SCA	gain-space search, single fidelity
Siano and Citro [59]	Buck prototype	fuzzy, MO-PSO	no equal-budget solver comparison
Abdelmalek et al. [1]	Buck, experimental	observer-based nonlinear, PSO	tracking/robustness focus, not a matched co-design
Olalla et al. [51]	PWM converters, polytopic model	robust LQR	polytopic certificate, no PID realization, no search over weights
Coutinho et al. [14]	multiloop process	PID, Bayesian optimization	not a power converter
Present work	audited non-ideal Buck, 1–46 V, switched replica with energy balance	LQI weights $\rightarrow$ exact 2-DOF PIDF; 6 global operators + refineBO; 6 families	structural equivalence theorem; 33 inequalities (3 measured on the switched model); switched validation vs. PI, PID, PIDF, LQR, LQG, LQI

these three elements: it starts from the history of each global run, models the objective and all 33 constraints with Gaussian processes, and searches a shrinking region around the best feasible records.

Table 1 summarizes the controllers that appear in the study, and Table 2 positions the work against representative Buck control and tuning studies.

1.2. Research gap and motivation

The review leaves three questions open. First, the link between the LQI of a Buck converter and a filtered PID is known in nominal transfer-function form, but it is not known whether it survives saturation, anti-windup, discontinuous conduction and parameter mismatch, which are exactly the conditions under which a converter operates across a wide range. Second, meta-heuristic tuning of converter controllers searches gain spaces, so a good result carries no guarantee and the size of the search box is a guess; searching the LQI weights instead has not been compared with a direct gain search under the same budget. Third, most tuning studies accept a candidate on the

180 averaged model that drives the search. In an earlier version of the present
 181 protocol, four of six winners accepted in this way failed on the switched
 182 model, because of switching limit cycles that the averaged model cannot rep-
 183 resent. The motivation of this paper is to close these three questions on a
 184 plant that is fully specified, so that every number can be recomputed.

185 1.3. Assumptions

186 The analysis rests on the following assumptions, each of which is tested
 187 or bounded later in the paper.

- 188 • The input voltage is constant, $V_{in} = 48$ V; line regulation is not part of
 189 the specification.
- 190 • The output network (R, r_C, C) is known at design time. Load steps are
 191 treated as unmeasured disturbances, and the error they cause in the
 192 equivalence is given in closed form.
- 193 • The PIDF measures the output voltage only. The inductor current is
 194 measured only by the full-state comparators and by the state-feedback
 195 twin of the proposal.
- 196 • Control is sampled synchronously with the 50 kHz carrier, with a one-
 197 sample computational delay; ADC quantization and the finite resolu-
 198 tion of the PWM are not modelled.
- 199 • Losses are the conduction and snubber losses of the declared model
 200 boundary; switching, reverse-recovery, magnetic and thermal losses are
 201 outside it.
- 202 • Component tolerances were not supplied. Robustness claims are made
 203 on the nominal operating polytope only.

204 1.4. Challenges

205 Three difficulties had to be solved. The first is theoretical: showing that
 206 the equivalence holds along trajectories, not only in the frequency domain,
 207 and identifying exactly which disturbances break it. The second is numeri-
 208 cal. A zero-order-hold discretization of the derivative filter, the usual choice,
 209 introduces a lag that separates the sampled PIDF from the sampled LQI by
 210 about 14.54 V during a wide slew, so the discretization had to be derived from
 211 the observer interpretation of the filter. The third concerns the search. The

feasible set is defined by 33 inequalities, three of which depend on switching phenomena; checking them on the switched model is expensive, while ignoring them lets through candidates that are unacceptable on the real power stage. The screen had to be short enough to run inside every evaluation and long enough to excite the coexisting limit cycles.

1.5. Contributions

The contributions of the paper are the following.

1. A formula-first chain from the non-ideal converter equations to the exact output-feedback realization of any LQI law as a 2-DOF PIDF, with every analytical quantity (equilibria, transfer functions, Riccati gain, LQR margins, a common D-region certificate over the operating polytope) instantiated and independently recomputed.
2. A structural equivalence theorem (Proposition 2): the PIDF filter state equals the capacitor voltage along every trajectory. Its domain of validity is stated, the gap to the full-state law is given in closed form, and a first-order-hold discretization reduces the sampled gap from 14.54 V to 0.35 V.
3. A constrained multi-criteria formulation (CMO-LQI) in the space of LQI weights, with 33 inequalities in engineering units, three of which are measured on the switched model during the search, together with the evidence from two pilots of why an analytical ripple bound or a steady switched screen is not sufficient.
4. A matched, equal-budget comparison of seven algorithms (six global operators followed by refineBO) across six controller families. It shows that the LQI coordinates do not speed up the search but confine it, at no cost in optimality, to the LQ-optimal set on which the gain-space optimum also lies.
5. A switched-model validation on the 24→1→46 V mission against PI, PID, PIDF, LQR, LQG and LQI, reported specification by specification.

1.6. Paper organization

Section 2 derives the non-ideal model and describes the switched replica of the reference Simulink model. Section 3 states the LQI synthesis and proves the nominal and structural equivalences. Section 4 defines the CMO-LQI problem and the seven algorithms. Section 5 reports the verification

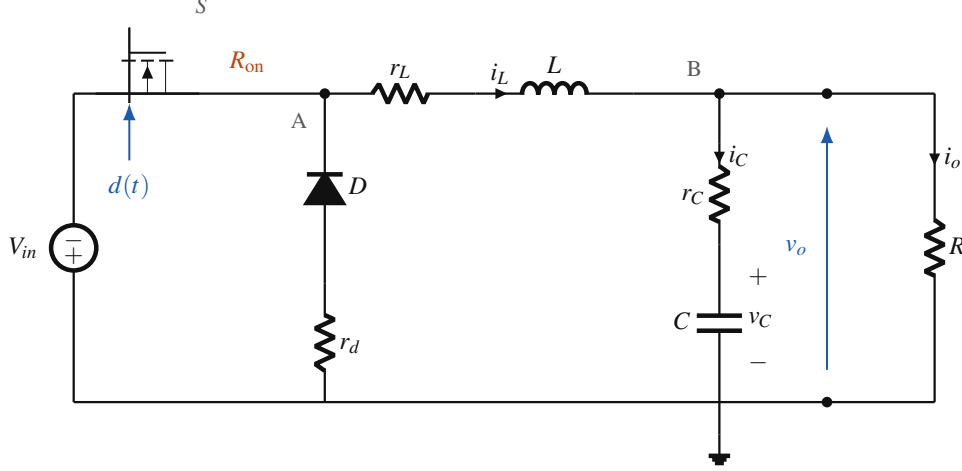


Figure 2: Non-ideal asynchronous Buck converter and adopted conventions.

of the equivalence, the algorithm and family comparisons, and the switched validation, and discusses the limitations. Section 6 concludes. The code, including a MATLAB S-function that runs the same control layer inside the reference Simulink model, is released with the paper.

2. Non-ideal Buck converter: from the circuit to the switched replica

2.1. Circuit and conventions

Fig. 2 shows the asynchronous converter. The state is $x = [i_L \ v_C]^\top$; i_L flows from the switching node to the output, i_C flows downward in the capacitor branch and the load disturbance i_p is positive when it draws additional current. The source is fixed, $V_{in} = 48$ V. The high-side switch is an IRF540N represented by its static on-resistance R_{on} ; the freewheel diode follows the affine conduction law of the STPST10H100SF data sheet, $v_D = V_f + r_d i_D$ [29, 64]. Table 3 lists the values, all decoded from the workspace of the reference Simulink model.

2.2. Averaged model and loss-aware equilibrium

The output node and the ESR give

$$i_L = i_C + \frac{v_o}{R} + i_p, \quad v_o = v_C + r_C i_C, \quad (1)$$

Table 3: Electrical and numerical parameters (reference model workspace).

Quantity	Value	Role
V_{in}	48 V, constant	source
L, r_L	100 μ H, 0.10 Ω	inductor branch
C, r_C	100 μ F, 0.05 Ω	capacitor branch
R	10 Ω	nominal load
R_{on}	0.05 Ω	IRF540N static surrogate
V_f, r_d	0.42 V, 0.020 Ω	STPST10H100SF affine law
R_s ($C_s = \infty$)	100 k Ω	resistive snubber across the switch
$R_{d,body}$	0.01 Ω	MOSFET body diode
f_s	50 kHz	PWM carrier
T_s	10 μ s	controller sampling ($= 1/(2f_s)$)
$[d_{\min}, d_{\max}]$	[0.02, 0.98]	total duty saturation

264 hence

$$i_C = \frac{R(i_L - i_p) - v_C}{R + r_C}, \quad v_o = \frac{R}{R + r_C}v_C + \frac{Rr_C}{R + r_C}(i_L - i_p). \quad (2)$$

265 With the switch on, $L\dot{i}_L = V_{in} - (r_L + R_{on})i_L - v_o$; with the diode conducting,
 266 $L\dot{i}_L = -V_f - (r_L + r_d)i_L - v_o$; in both cases $C\dot{v}_C = i_C$. Duty averaging yields

$$L\dot{i}_L = dV_{in} - [r_L + dR_{on} + (1 - d)r_d]i_L - (1 - d)V_f - v_o. \quad (3)$$

267 At equilibrium $I_L = V_o/R + I_p$ and the loss-aware duty is

$$d_{ff} = \frac{V_o + (r_L + r_d)I_L + V_f}{V_{in} - (R_{on} - r_d)I_L + V_f}. \quad (4)$$

268 Every controller of this paper uses (4) with nominal parameters and $I_p = 0$
 269 as feedforward; the feedforward never sees the simulated plant.

270 2.3. Small-signal model and transfer functions

271 Let $\gamma = R/(R + r_C)$, $\rho_0 = r_L + r_d + d_0(R_{on} - r_d)$ and $E_d = V_{in} +$
 272 $V_f - (R_{on} - r_d)I_{L,0}$. Linearizing (2)–(3) gives $\delta\dot{x} = A\delta x + B_d\delta d + B_p\delta i_p$,
 273 $\delta v_o = C_y\delta x + D_p\delta i_p$ with

$$A = \begin{bmatrix} -(\rho_0 + \gamma r_C)/L & -\gamma/L \\ \gamma/C & -\gamma/(RC) \end{bmatrix}, \quad B_d = \begin{bmatrix} E_d/L \\ 0 \end{bmatrix}, \quad C_y = [\gamma r_C \quad \gamma], \quad (5)$$

Table 4: Equilibria, monic $\Delta(s)$, G_{vd} numerator and stationary conduction screen at the three commanded levels (nominal load, $i_p = 0$). $\omega_z = 1/(r_C C) = 2 \times 10^5$ rad/s at every level.

V_o (V)	$I_{L,0}$ (A)	d_0	ρ_0 (Ω)	E_d (V)	$\Delta(s)/(LC(R + r_C))$	G_{vd} numerator	$\Delta I_{L,pp}$ (A)	I_{crit} (A)	$I_L - I_{crit}$ (A)	R_{crit}/R
1	0.1	0.029576	0.120887	48.417	$s^2 + 2701.41s + 1.00705 \times 10^8$	$2.40881 \times 10^4 s + 4.81761 \times 10^9$	0.1941	0.0970	0.0030	1.030
24	2.4	0.511045	0.135331	48.348	$s^2 + 2845.85s + 1.00849 \times 10^8$	$2.40537 \times 10^4 s + 4.81075 \times 10^9$	2.3470	1.1735	1.2265	2.045
46	4.6	0.972868	0.149186	48.282	$s^2 + 2984.40s + 1.00987 \times 10^8$	$2.40209 \times 10^4 s + 4.80418 \times 10^9$	0.2496	0.1248	4.4752	36.856

274 $B_p = [\gamma r_C / L \quad -\gamma / C]^\top$ and $D_p = -\gamma r_C$. The control-to-output transfer
 275 function is

$$G_{vd}(s) = \frac{E_d R(1 + r_C C s)}{\Delta(s)}, \quad (6)$$

$$\Delta(s) = LC(R + r_C)s^2 + [L + C((R + r_C)\rho_0 + Rr_C)]s + R + \rho_0,$$

276 with the ESR zero $\omega_z = N_C = 1/(r_C C) = 2 \times 10^5$ rad/s. Table 4 instantiates
 277 (4)–(6) at the three commanded levels; the closed form and a state-space
 278 conversion agree to machine precision. At the 24 V synthesis point, (A, B_d)
 279 and (A, C_y) have rank two and the integral-augmented pair has rank three.

280 2.4. Conduction mode across the range

281 For a duty d_{ff} the inductor ripple, the boundary current and the bound-
 282 ary load are

$$\Delta I_{L,pp} = \frac{V_o(1 - d_{ff})}{Lf_s}, \quad I_{crit} = \frac{\Delta I_{L,pp}}{2}, \quad R_{crit} = \frac{2Lf_s}{1 - d_{ff}}. \quad (7)$$

283 The stationary screen (Table 4) is positive at every level but not uniform:
 284 at 1 V the current margin is 2.96 mA (3.05 % of I_{crit}) and R_{crit} is only 1.030
 285 times the nominal load. The switched model is more pessimistic than this
 286 screen: over the steady 1 V window it spends 15.00 % of the time in discon-
 287 tinuous conduction at 60.57 % efficiency, because the diode drop is 42 % of
 288 the commanded output. Discontinuous conduction is thus a nominal regime
 289 of the mission, and every controller is validated in it.

290 2.5. Switched replica of the reference model

291 The acceptance model (Fig. 3) is the Simulink/Simscape Electrical model
 292 `buck fo_lqi_fixed_reference_v6.1_46V_R2022a.slx`. For the campaign we
 293 use a replica written from its block parameters (`cmo/sim.py`): a resistive
 294 switch with snubber R_s and a body diode $R_{d,body}$; the affine freewheel diode,

which blocks reverse current so that discontinuous conduction arises by itself (the 1 ns snubber-leakage branch is solved quasi-statically); a continuous sawtooth carrier whose edges are located exactly inside the integration step; a controller sampled at T_s with a one-sample output delay, exactly as the S-function of the reference model. The step is 0.2 μ s (100 steps per switching period) with fourth-order Runge–Kutta integration.

The energy boundary is the one declared in the model workspace:

$$\begin{aligned} P_{in} &= V_{in}i_{in}, & P_u &= \frac{v_o^2}{R} + v_o i_p, \\ P_{loss} &= r_L i_L^2 + r_C i_C^2 + v_{SW} i_{SW} + v_D i_D, \end{aligned} \quad (8)$$

the snubber dissipation being contained in $v_{SW} i_{SW}$. The three energies are integrated with the same Runge–Kutta stages as the states, so the residual $E_{in} - E_u - E_{loss} - \Delta E_{stored}$ measures integration consistency only. It stays below $4.5 \times 10^{-6} \%$ of the input energy for every replay reported here.

The replica reproduces the controller-independent figures of the reference model: 15.00 % of discontinuous conduction and 60.57 % efficiency in the 1 V window (15.27 % and 60.51 % in the Simulink audit of the previous version of this study). Its discrete LQI comparator gain, synthesized by the rule of Section 4.5, equals the gain stored in the model workspace to all printed digits, and the fixed PI and LQI comparators reproduce the Simulink overshoot and peak current to within 2 % (Section 5.5). A MATLAB S-function (`matlab/cmo_sfund.m`) implements the same control layer line by line, and `matlab/run_cmo_validation.m` replays every frozen controller on the reference `.slx` without modifying it.

3. LQI synthesis in weight space and its exact 2-DOF PIDF realization

3.1. Integral augmentation and Bryson weights

Let $z(t) = \int_0^t (r - v_o) d\tau$. Around the synthesis equilibrium ($V_o = 24$ V) the augmented plant is

$$\dot{x}_a = A_a x_a + B_a \delta d, \quad A_a = \begin{bmatrix} A & 0 \\ -C_y & 0 \end{bmatrix}, \quad B_a = \begin{bmatrix} B_d \\ 0 \end{bmatrix}, \quad x_a = \begin{bmatrix} \delta x \\ z \end{bmatrix}, \quad (9)$$

and the LQI law $\delta d = -K x_a$, $K = [K_{ix} \ K_{vx} \ K_z]$, minimizes $\int_0^\infty (x_a^\top Q x_a + R_d \delta d^2) dt$ with

$$A_a^\top P + P A_a - P B_a R_d^{-1} B_a^\top P + Q = 0, \quad K = R_d^{-1} B_a^\top P. \quad (10)$$

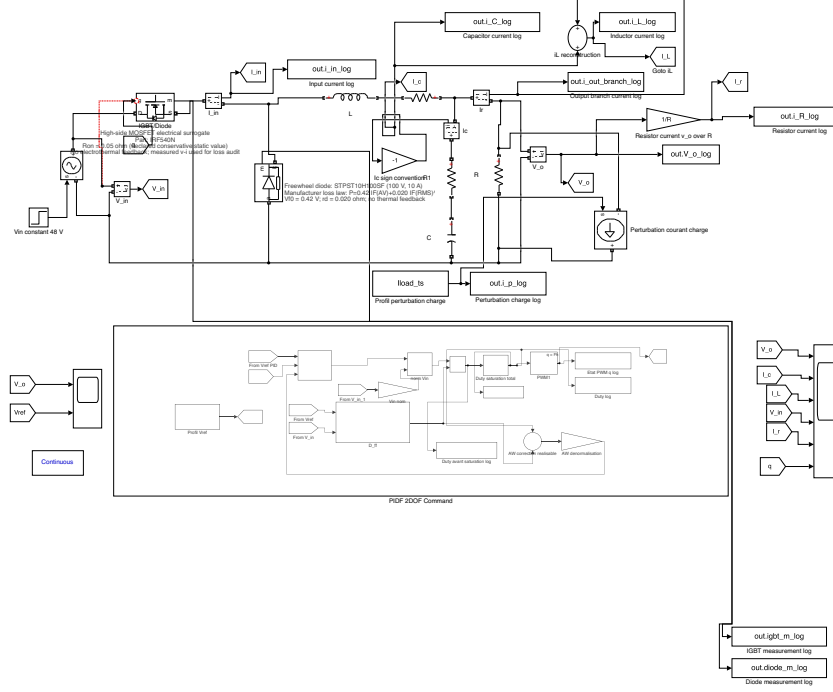


Figure 3: Reference Simulink/Simscape Electrical switching model (fixed 48 V source, IRF540N surrogate, STPST10H100SF diode, resistive snubber, continuous PWM at 50 kHz, sampled controller subsystem and energy loggers). Only the controller S-function is replaced when a candidate is replayed.

323 Bryson's rule assigns $Q = \text{diag}(\Delta_i^{-2}, \Delta_v^{-2}, (\Delta_v/\omega_B)^{-2})$ and $R_d = \Delta_d^{-2}$: Δ_i
 324 and Δ_v are admissible current and voltage excursions and the integral state,
 325 in Vs, is scaled by a target bandwidth ω_B . The duty excursion is fixed at
 326 its physical value $\Delta_d = (d_{\max} - d_{\min})/2 = 0.48$, which removes the scale
 327 redundancy $(Q, R_d) \rightarrow (\alpha Q, \alpha R_d)$ of (10). The decision vector of the co-
 328 design is

$$\xi = [\log_{10} \Delta_i, \log_{10} \Delta_v, \log_{10} \omega_B, \log_{10} K_b]^\top, \quad (11)$$

329 where K_b is the back-calculation rate of the anti-windup, which lies outside
 330 the linear theory and is searched alongside the weights. The normalization
 331 record ξ_0 uses $\Delta_i = 15$ A, $\Delta_v = 46$ V (the largest commanded output) and
 332 $\omega_B = K_b = 2\pi \cdot 1500$ rad/s.

3.2. Frequency-domain realization

For $i_p = 0$ the output network gives, in the Laplace domain, $v_C = v_o/(1 + r_C Cs)$ and $i_L = v_o/R + C s v_o/(1 + r_C Cs)$. Substituting into the state part of the LQI law,

$$\frac{K_{ix}i_L + K_{vx}v_C}{v_o} = \frac{K_{ix}}{R} + \frac{K_{ix}Cs + K_{vx}}{1 + r_C Cs} = K_p + K_d \frac{N_C s}{s + N_C}, \quad (12)$$

which exposes one constant and one filtered derivative term.

Proposition 1 (Nominal realization). *The output-error compensator generated by the full-state LQI law is the 2-DOF PIDF*

$$d = d_{ff}(r) + K_p(br - v_o) + \frac{K_i}{s}(r - v_o) + K_d \frac{N_C s}{s + N_C}(cr - v_o), \quad (13)$$

with

$$\begin{aligned} K_p &= K_{vx} + \frac{K_{ix}}{R}, & K_i &= -K_z, & K_d &= C(K_{ix} - r_C K_{vx}), \\ N &= N_C = \frac{1}{r_C C}, & b &= 1, & c &= 0. \end{aligned} \quad (14)$$

Proof. Split the right-hand side of (12) into its zero-frequency value $K_{vx} + K_{ix}/R$ and the remainder $C(K_{ix} - r_C K_{vx})N_C s/(s + N_C)$. The equilibrium map $x_{eq}(r) = [r/R \ r]^\top$ contributes $+(K_{ix}/R + K_{vx})r = K_p r$, hence $b = 1$; the state-feedback law has no derivative of the reference, hence $c = 0$; the integral state contributes $-K_z z$, hence $K_i = -K_z$. $\square$

Because $N_C = 2 \times 10^5 \text{ rad/s} < \pi/T_s = 3.14 \times 10^5 \text{ rad/s}$, the exact filter pole is implementable at the adopted sampling period, and no projected surrogate is needed: every candidate of the search is realized with its own exact pole.

3.3. Structural (trajectory-level) equivalence

Proposition 1 is a statement about transfer functions, i.e. about the linear nominal plant with consistent initialization. The next result shows that the realization is in fact exact along every trajectory of the *nonlinear* converter, because it only uses the output network, never the inductor branch. Write the PIDF of (13) in state form,

$$\begin{aligned} \tilde{d} &= d_{ff}(r) + K_p(br - v_o) + x_I + K_d N(cr - v_o - x_F), & d &= \text{sat}(\tilde{d}), \\ \dot{x}_I &= K_i(r - v_o) + K_b(d - \tilde{d}), & \dot{x}_F &= N(cr - v_o - x_F), \end{aligned} \quad (15)$$

356 and the LQI with the same feedforward and anti-windup as

$$\begin{aligned}\tilde{d} &= d_{ff}(r) - K_{ix}(i_L - \frac{r}{R}) - K_{vx}(v_C - r) - K_z z, \\ \dot{z} &= (r - v_o) + \frac{K_b}{|K_z|}(d - \tilde{d}).\end{aligned}\tag{16}$$

357 **Proposition 2** (Structural equivalence). *Let r be piecewise constant, let the*
 358 *PIDF use (14) with $c = 0$, $N = N_C$ computed from the true (r_C, C) , and let*
 359 *$x_F(0) = -v_C(0)$ and $x_I(0) = -K_z z(0)$. Then, along every trajectory of the*
 360 *converter—averaged or switched, in continuous or discontinuous conduction,*
 361 *with or without active saturation and anti-windup, and for any values of L ,*
 362 *r_L , R_{on} , r_d , V_f and V_{in} :*

- 363 (i) $x_F(t) = -v_C(t)$ for all $t \geq 0$;
 364 (ii) the two unsaturated commands satisfy

$$\tilde{d}_{LQI}(t) - \tilde{d}_{PIDF}(t) = -K_{ix}\left(i_o(t) - \frac{v_o(t)}{R}\right),\tag{17}$$

- 365 where $i_o = i_L - i_C$ is the actual output-branch current and R the nominal
 366 load;
 367 (iii) if $i_o \equiv v_o/R$ (no load disturbance, nominal load), the two closed loops
 368 generate identical trajectories.

369 *Proof.* (i) The capacitor branch gives $v_o = v_C + r_C C \dot{v}_C$ exactly, whatever
 370 flows into the output node, so $\dot{v}_C = N_C(v_o - v_C)$. Let $\varepsilon = x_F + v_C$. Between
 371 reference steps, with $c = 0$, $\dot{\varepsilon} = N_C(-v_o - x_F) + N_C(v_o - v_C) = -N_C \varepsilon$, and
 372 ε is continuous across steps because $c = 0$. Hence $\varepsilon(0) = 0$ implies $\varepsilon \equiv 0$.
 373 (ii) With (i), the derivative term of (15) is $K_d N_C(v_C - v_o) = -K_d N_C r_C i_C =$
 374 $-(K_{ix} - r_C K_{vx})i_C$. In (16) substitute $i_L = i_o + i_C$ and $v_C = v_o - r_C i_C$:
 375 $-K_{ix}(i_L - r/R) - K_{vx}(v_C - r) = K_p(r - v_o) - (K_{ix} - r_C K_{vx})i_C - K_{ix}(i_o - v_o/R)$.
 376 With $b = 1$ and $x_I = -K_z z$ the difference of the two commands is (17). (iii) If
 377 the right-hand side of (17) vanishes, both laws issue the same $\tilde{d}$ and d at every
 378 instant. Then $\frac{d}{dt}(x_I + K_z z) = K_i(r - v_o) + K_b(d - \tilde{d}) - |K_z|(r - v_o) - K_b(d - \tilde{d}) =$
 379 0 because $K_z < 0$, so $x_I = -K_z z$ is preserved, and the two closed-loop
 380 systems coincide; uniqueness of solutions gives identical trajectories. $\square$

381 Three practical consequences follow. First, the PIDF does not approxi-
 382 mate the LQI on the nonlinear converter; it *is* the LQI whenever the load
 383 current is the nominal one, and the saturation, anti-windup and conduction-
 384 mode effects that invalidate small-signal arguments do not break it. Second,

the price of removing the current sensor is stated exactly by (17): the full-state law contains an instantaneous proportional feedback $-K_{ix}(i_o - v_o/R)$ on the unmodelled output current, which the PIDF must recover through its integral action. Third, the equivalence is lost by exactly three mechanisms: a load disturbance or load mismatch (through (17)), a mismatch of (r_C, C) (through $N \neq N_C$ in (i)), and sampling, because the discrete filter reconstructs v_C only between samples while the sampled LQI reads i_L with its switching ripple. Section 5.2 verifies each case.

3.4. Guarantees and their scope

LQR margins. For the full-state augmented loop $L_K(s) = K(sI - A_a)^{-1}B_a$ the return-difference identity gives $|1 + L_K(j\omega)| \geq 1$, hence the gain margin $(1/2, \infty)$ and a phase margin of at least 60° [57, 3]. By Proposition 2(iii) these margins are those of the PIDF loop at the input of the nominal linear plant; they do not survive sampling or an observer [19].

Operating-polytope certificate. The augmented closed-loop matrix is affine in $(\rho_0(d_0), E_d(I_{L,0}))$. Over $v_o \in [1, 46]$ V and $i_p \in [0, 0.5]$ A the rectangle $d_0 \in [0.0295764, 0.9744132]$, $I_{L,0} \in [0.1, 5.1]$ A has four vertices $A_{cl,k}$. A common $P \succ 0$ with

$$A_{cl,k}P + PA_{cl,k}^\top + 2\alpha P \prec 0, \quad \begin{bmatrix} \sin \theta(M_k + M_k^\top) & \cos \theta(M_k - M_k^\top) \\ \cos \theta(M_k^\top - M_k) & \sin \theta(M_k + M_k^\top) \end{bmatrix} \prec 0, \quad (18)$$

$M_k = A_{cl,k}P$, $\zeta = \cos \theta$, places every closed-loop matrix of the convex hull in $\{\Re s < -\alpha\} \cap \{\zeta(s) > \zeta\}$ [13]. Bisection gives the boundary values; a 1% safety factor is applied and the recovered P is re-checked for strictness.

Discrete implementation. All controllers run at T_s with a one-sample computational delay, total duty saturation and forward-Euler integral and back-calculation updates. Proposition 2(i) says that the derivative-filter state is an observer of the capacitor voltage, $x_F = cr - v_C$, and it should be discretized as one. The usual zero-order-hold discretization, $x_F[k+1] = \phi x_F[k] + (1-\phi)w[k]$ with $w = cr - v_o$ and $\phi = e^{-NT_s}$, uses at sample k an estimate built from $v_o[k-1]$ only; during a 45 V slew v_o moves by about 2.7 V per sample and $K_d N \approx 0.7$ turns this lag into a duty error of order one. We therefore use the triangle-hold (first-order hold) update, exact when v_o is piecewise linear between samples,

$$x_F[k] = \phi x_F[k-1] + (1-\phi)w[k-1] + \gamma(w[k] - w[k-1]), \quad \gamma = 1 - \frac{1-\phi}{NT_s}, \quad (19)$$

416 evaluated with the current sample before the command $\tilde{d}[k] = d_{ff} + K_p(br[k] -$
 417 $v_o[k]) + x_I[k] + K_d N(w[k] - x_F[k])$ is formed, and initialized with $x_F[0] =$
 418 $cr[0] - v_C(0)$. Section 5.2 shows that this single choice decides whether the
 419 sampled PIDF remains equivalent to the sampled LQI.

420 3.5. Numerical instantiation

421 At the 24 V point, (5) evaluates to

$$A = \begin{bmatrix} -1850.8259 & -9950.2488 \\ 9950.2488 & -995.0249 \end{bmatrix} \text{s}^{-1}, \quad (20)$$

$$B_d = \begin{bmatrix} 483480 \\ 0 \end{bmatrix}, \quad C_y = [0.0497512 \quad 0.9950249].$$

422 For ξ_0 , $Q = \text{diag}(0.00444444, 0.00047259, 41978.4686)$, $R_d = 4.34027778$
 423 and (10) gives $K = [0.03564341 \quad 0.01212576 \quad -98.34550916]$ with a rel-
 424 ative Riccati residual of 2.18×10^{-14} and closed-loop poles -4243.01 and
 425 $-7917.86 \pm j6986.57 \text{ rad/s}$. The realization (14) gives

$$\begin{aligned} \theta_0 &= [K_p, K_i, K_d, N, b, c, K_b] \\ &= [0.0156901028, 98.3455092, 3.5037119 \times 10^{-6}, 2 \times 10^5, 1, 0, 9424.778], \end{aligned} \quad (21)$$

426 with a zero coefficient residual and a maximum relative frequency-domain
 427 error of 8.67×10^{-16} over $[10^{-1}, 10^8] \text{ rad/s}$. The minimum return difference is
 428 1.000000 and the phase margin of the full-state loop is 87.04° . The operating-
 429 polytope certificate at ξ_0 is $\alpha_{cert} = 4157.9286 \text{ rad/s}$ and $\zeta_{cert} = 0.7330911$
 430 ($\lambda_{\min}(P) > 0$ and strictly negative LMI eigenvalues were re-verified on the
 431 recovered matrices).

432 4. Constrained co-design problem and algorithms

433 4.1. Workflow

434 Fig. 4 summarizes the protocol. Offline, a candidate ξ is mapped by (10)
 435 and (14) to a 2-DOF PIDF; the averaged evaluator runs six scenarios and
 436 the switched screen runs one 34 ms transition sequence; Deb ordering ranks
 437 the record. After 240 global and 60 local calls the best record of each run is
 438 frozen, and only then replayed on the full switched mission, which is never
 439 visible to the search.

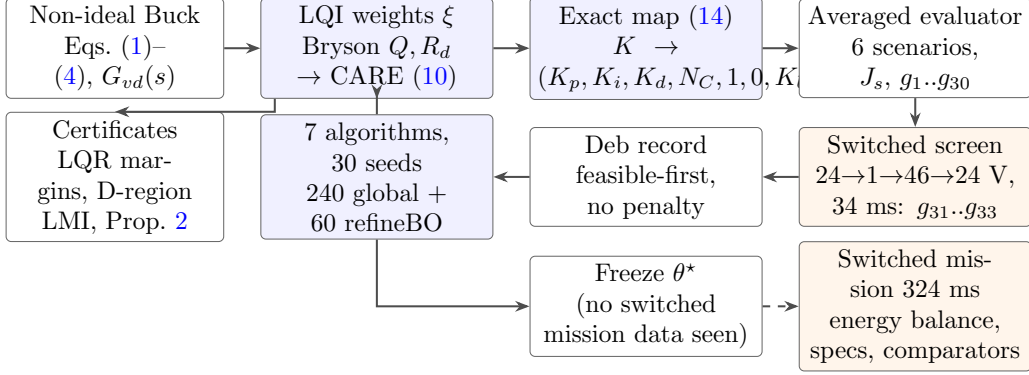


Figure 4: Formula-first CMO–LQI–PIDF workflow. Solid arrows: evaluation inside the search; dashed arrow: acceptance replay after the freeze. The switched screen is the only switched information used during the search.

4.2. Scenarios and objective

The averaged evaluator integrates (3) with the hybrid guard $i_L \geq 0$ (RK4, $2\mu\text{s}$) under the sampled control layer of Section 3. Six scenarios are declared (Table 5); each starts from the analytical equilibrium preceding its first event. For scenario s the seven criteria are the loss intensity E_{loss}/E_u , IAE, ISE, global ITAE, event-reset ITAE, RMSE and MAE, each divided by its value for the normalization record ξ_0 . The scalar objective is the mean of the 6×7 ratios,

$$J_s(\xi) = \frac{1}{42} \sum_{s=1}^6 \mathbf{1}^\top r_s(\xi), \quad J_s(\xi_0) = 1. \quad (22)$$

MAE is IAE divided by the horizon and RMSE is the square root of ISE divided by it, so two of the seven entries are redundant; the induced weights (2/7 on the IAE family, 2/7 on the ISE family, 1/7 on each other criterion) are declared rather than left implicit. The objective ranks feasible candidates only.

Table 5: Averaged scenarios (the source is 48 V in all of them).

ID	T (ms)	reference	load pulse (+0.5 A)
S0	90	24→1→46 V at 30, 60 ms	15–25 ms
S1a	40	24→1 V at 10 ms	–
S1b	40	1→46 V at 10 ms	–
S1c	40	46→24 V at 10 ms	–
S2a	40	24 V	10–20 ms
S2b	40	46 V	10–20 ms

4.3. Thirty-three inequalities in engineering units

For each scenario five inequalities $g_{s,j} \leq 0$ are evaluated separately:

$$\begin{aligned}
g_{s,1} &= \frac{\max_t \sigma_k (v_o - r_k)}{1.5 \text{ V}} - 1 && \text{overshoot beyond each new level,} \\
g_{s,2} &= \frac{\max_{t \in \mathcal{T}_p} |r - v_o|}{0.5 \text{ V}} - 1 && \text{load-pulse deviation,} \\
g_{s,3} &= \frac{\max_t i_L + \Delta I_{L,pp}^{\max}/2}{23 \text{ A}} - 1 && \text{device current,} \\
g_{s,4} &= \frac{\max_k |\bar{e}_k|}{25 \text{ mV}} - 1 && \text{steady error,} \\
g_{s,5} &= \frac{\rho_{\ell,s} - 1}{0.005} - 1, \quad \rho_{\ell,s} = \frac{E_{\text{loss}}/E_u}{(E_{\text{loss}}/E_u)_{\xi_0}} && \text{loss intensity,}
\end{aligned} \tag{23}$$

where σ_k is the sign of the k -th reference step, $\mathcal{T}_p$ runs from the onset of the load pulse to the next event, $\bar{e}_k$ is the mean error over the last 2 ms of each constant segment and 23 A is the IRF540N continuous drain rating at 100 °C. The averaged peak current is augmented by the worst half ripple $\Delta I_{L,pp}^{\max}/2 = 1.17 \text{ A}$ (Table 4). A family that does not apply to a scenario (no step, no load pulse) is set to -1 . The loss-intensity gate keeps the design loss-aware: no scenario may convert energy less efficiently, per useful joule, than the Bryson record ξ_0 by more than 0.5 %. These 30 inequalities are completed by three measured ones,

$$g_{31} = \frac{\max_k \text{pp}(d)}{0.20} - 1, \quad g_{32} = \frac{\max_k |\bar{e}_{sw,k}|}{25 \text{ mV}} - 1, \quad g_{33} = \frac{\max_t i_{L,sw}}{23 \text{ A}} - 1, \tag{24}$$

obtained from one run of the switched replica over the transition sequence 24→1→46→24 V (steps at 2, 14 and 24 ms, 34 ms in total, 1 μ s RK4 with

exact PWM edges). The duty peak-to-peak and the mean error are measured over the last 4 ms of each level. A candidate is feasible when $\sum_j \max(g_j, 0) \leq 10^{-4}$; the screen costs about 12 ms per candidate against 14 ms for the six averaged scenarios.

Why the screen contains large transitions. The protocol was frozen after two pilot campaigns that are reported, not hidden. Pilot 1 used the analytical ripple bound of the earlier version of this study, $\rho_{rip} = \max_V |C_{fb}(z=-1)| \Delta V_{o,pp}(V)/2 \leq 0.20$, where C_{fb} is the discrete feedback path evaluated at the controller Nyquist frequency, which coincides with the carrier frequency because $T_s = 1/(2f_s)$. Every branch winner it produced satisfied the bound ($\rho_{rip} \approx 0.07$ – 0.19) and yet, on the switched model, several sustained a limit cycle with duty swings of 0.7–0.9 at 24 V and offsets of 0.3–1.8 V. Pilot 2 replaced the bound by steady 10 ms switched windows started *from equilibrium* at 1, 24 and 46 V. Its best design (178 of 180 runs feasible) passed that screen, but on the reference mission it entered, after the large 24→1 V transition, a different limit cycle in which one sample in four clips at d_{min} , leaving a -42 mV offset at 1 V. The loop thus holds *coexisting* switching limit cycles, and the one reached depends on the transient that precedes it; this is why the final screen is a transition sequence. ρ_{rip} is kept as a reported diagnostic only. Both pilots used the zero-order-hold filter; the triangle-hold update (19), adopted after the equivalence audit of Section 5.2, removes most of the limit-cycling designs by itself.

Useful-energy band. The earlier protocol also required $|E_u/E_{u,\xi_0} - 1| \leq 0.5\%$ in every scenario. We report this quantity but no longer constrain it. Anchored to ξ_0 , it penalizes the removal of the 9.8 V undershoot of ξ_0 on the 46→24 V step, because a controller that holds 24 V delivers more energy than one that undershoots; anchored to the ideally regulated task, it penalizes every controller by 1–5% on step-down scenarios, where the asynchronous converter can only discharge through its load. With absolute overshoot, load-deviation and steady-error gates the delivered task is already pinned, and the loss intensity is normalized per useful joule, so under-delivery cannot improve it.

Feasibility is stated in absolute units, not as non-inferiority against ξ_0 . With ratio gates, 24 of 36 constraints are active at ξ_0 and a gentler normalization record leaves no candidate that dominates it; with absolute gates every controller family of Section 4.5 is judged against the same specification, and

Table 6: Algorithms 1–7. Population 12, 240 global calls, then 60 refineBO calls initialized from the same run’s history (300 calls per run).

Alg.	Exploration / update	Exploitation / survival	Fixed parameters
1 PSO [37]	velocity with independent cognitive and social draws	personal and global Deb incumbents	$w = 0.9 - 0.5\tau$, $c_1 = c_2 = 1.7$, $ v \leq 0.2$
2 GA	binary Deb tournaments, SBX crossover	polynomial mutation, elitist $(\mu + \lambda)$	$\eta_c = 15$, $\eta_m = 20$, $p_m = 1/n$
3 ABC [35]	one-coordinate differential move (employed, onlooker)	greedy Deb replacement, scout	limit $\max(5, \text{round}(0.5 n_p n))$
4 pAEABC	ABC move scaled by diversity $s_k = \text{clip}(0.5 + 0.15/D_k, 0.5, 2)$, extra coordinate kick w.p. $0.25(1 - \tau)$	as ABC	inspired by Alsamia et al. [2]
5 pIGWO	three-leader GWO with $a = 2(1 - \tau^2)$, Gaussian kick w.p. $0.15(1 - \tau) + 0.02$	elitist pooling	inspired by Hou et al. [28]
6 pIGWO–DLH	linear $a = 2 - 2k/K$ GWO trial and an independently evaluated radial local-hunt trial	better trial replaces the wolf (non-elitist)	$R_i = \ x_i - x_\alpha\ /2$; inspired by Nadimi-Shahraki et al. [47]
7 refineBO	shared-kernel Matérn-5/2 GPs on J_s and $g_1, \dots, g_{33}$; pool of 1000 around the 10 Deb-best records, radius $0.04 \rightarrow 0.003$	$\alpha = P_f(\text{EI} + 0.02\sigma_J) + 10^{-4}P_f$, $P_f = \prod_j \Phi(-\mu_j/\sigma_j)$; restoration mode if no feasible incumbent	60 calls

502 ξ_0 itself is infeasible because it overshoots by 6.2 V on the 1→46 V step.

503 4.4. Algorithms and budgets

504 Constraint handling uses Deb’s rules [16]: feasible beats infeasible, fea-
505 sible records are ranked by J_s , infeasible ones by aggregate violation; no
506 penalty weight is tuned. All methods work in the normalized box $u \in [0, 1]^n$,
507 receive the matched seed $2026091200 + k$, $k = 1, \dots, 30$, and the same initial
508 population of 12: ξ_0 first, six further individuals within a normalized radius
509 0.05 of it, five uniform. One counted call is one complete evaluation (six
510 averaged scenarios, the switched screen, 33 inequalities). Table 6 lists the
511 operators.

512 The prefix “p” marks project variants that are inspired by, but not
513 claimed to be operator-identical with, the cited algorithms. τ is the fraction
514 of the budget consumed. The product P_f of marginal feasibility probabili-
515 ties is an independence approximation used for ordering only; every accepted
516 point is checked by the exact evaluator. Wall time is logged but never inter-
517 preted as an energy or performance quantity.

518 4.5. Controller families and fixed-rule comparators

519 To separate the value of the parameterization from that of the optimizer,
520 the identical protocol (evaluator, 33 inequalities, 7 algorithms, 30 seeds, 300
521 calls) is run on six families:

- 522 • **CMO–LQI–PIDF**: ξ of (11) $\rightarrow$ (10) $\rightarrow$ (14); 4 variables, reads v_o
523 only;
- 524 • **CMO–LQI–SF**: the same ξ and the same continuous gain, applied as
525 full-state LQI with measured i_L and i_C (the twin of Proposition 2);
- 526 • **PIDF-direct**: the same 2-DOF structure ($b = 1, c = 0, N = N_C$) with
527 $(\log K_p, \log K_i, \log K_d, \log K_b)$ searched directly over the gain ranges
528 spanned by the LQI box;
- 529 • **PIDF7-direct**: $K_p, K_i, K_d, N, b, c, K_b$ all free (7 variables);
- 530 • **PID-direct**: backward-difference derivative on $-v_o, b = 1, (K_p, K_i, K_d, K_b)$
531 free;
- 532 • **PI-direct**: (K_p, K_i, K_b) free.

533 *Fixed-rule comparators.* Six classical designs share the control layer and are
534 synthesized at 24 V, $T_s = 10 \mu\text{s}$, with the delay $1.5T_s$ (computation plus
535 ZOH) in every frequency-domain rule. *PI*: crossover $0.03f_s$, phase margin
536 60° , $K_b = K_i/K_p$. *PID*: zeros cancelling the LC pair of $\Delta(s)$, crossover set for
537 60° of phase margin including the ESR zero, backward-difference derivative
538 on $-v_o, b = 1, c = 0, K_b = 1/\sqrt{T_i T_d}$. *PIDF*: the Type-III rule, i.e. the
539 PID zeros plus a filter pole on the ESR zero $N = N_C$, 60° of phase margin.
540 *LQR*: discrete Riccati solution on the ZOH model with the Bryson limits of
541 ξ_0 , measured i_L and $v_C = v_o - r_C i_C$, no integral action. *LQG*: the LQR gain
542 with a steady-state Kalman predictor on v_o only (process noise 0.01 in duty,
543 measurement noise 0.05 V). *LQI*: discrete Riccati solution of the integral-
544 augmented ZOH model with the same weights, measured state, $K_b = \omega_B$.
545 None of them is tuned by the proposed search; they represent what the
546 standard rules deliver on this plant.

547 4.6. Statistics and validation

548 Methods are compared as matched blocks over the 30 seeds with the
549 Friedman test and Holm-adjusted paired Wilcoxon signed-rank tests [17];
550 a run’s score is J_s if feasible and 10^3 plus its violation otherwise, which is
551 consistent with Deb ordering. Families are compared pairwise on the same
552 (method, seed) cells. The retained controller of each family is the best feasible
553 record over its 180 runs; it is frozen and replayed on the 324 ms reference
554 mission of the Simulink model (24 $\rightarrow$ 1 $\rightarrow$ 46 V at 108 and 216 ms, +0.5 A load

555 pulse at 54–90 ms, initial state at the 24 V equilibrium), with the energy
 556 balance of (8).

557 5. Results and discussion

558 5.1. Formula-first verification

559 Every analytical quantity of Sections 2–3 was recomputed twice: from the
 560 closed forms and from independent numerical routes (state-space to transfer-
 561 function conversion, a general CARE solver, a frequency sweep of (12) against
 562 (13), and an SDP solver for (18)). The results of Section 3.5 agree with the
 563 values archived by the earlier version of this study, obtained with a different
 564 code base: the gain, the poles and θ_0 to all printed digits, and the LMI
 565 bounds α_{cert} , ζ_{cert} to within 2×10^{-7} relative, the bisection tolerance. The
 566 companion MATLAB script `cmo_formula_first.m` repeats the chain with
 567 `icare` and `freqresp`.

568 5.2. The equivalence, tested where it should hold and where it should fail

569 Table 7 and Fig. 5 test Proposition 2 on the 324 ms reference mission with
 570 continuous-time controllers on the nonlinear averaged plant (RK4, 0.05 μ s).
 571 With nominal output network and no load pulse the LQI and its 2-DOF
 572 PIDF produce identical trajectories to 1.6×10^{-13} V, although 1.1 % of the
 573 mission is spent in duty saturation, the averaged DCM guard $i_L \geq 0$ is
 574 active and the anti-windup path is exercised. Changing L by -20% and
 575 doubling r_L and R_{on} leaves the identity intact (2.8×10^{-14} V, with 34.1 %
 576 of saturation), exactly as the proof predicts, because these parameters never
 577 enter the output network. The three predicted failure modes appear with the
 578 predicted signs: a 0.5 A load pulse (0.411 V), a 20 % load mismatch (0.609 V)
 579 and a 20 % capacitance mismatch that detunes N from N_C (2.823 V).

580 Sampling is the practical case. With the zero-order-hold filter the sampled
 581 PIDF departs from the sampled full-state LQI by 14.54 V on the 1→46 V
 582 step; with the triangle-hold update (19) the departure falls to 0.35 V, while
 583 both sampled laws sit 2.54 V from the continuous trajectory because of the
 584 common one-sample delay. The realization is therefore exact in continuous
 585 time and remains a close realization under sampling *provided* the filter is
 586 discretized as the capacitor-voltage observer it is.

Table 7: Structural-equivalence audit (Proposition 2): largest $|v_o^{LQI} - v_o^{PIDF}|$ over the 324 ms mission.

Case	predicted	measured
nominal, $i_p = 0$	identical	1.6×10^{-13} V
$L - 20\%$, $r_L \times 2$, $R_{on} \times 2$	identical	2.8×10^{-14} V
0.5 A load pulse	$\neq$, Eq. (17)	0.411 V
$R + 20\%$	$\neq$, Eq. (17)	0.609 V
$C + 20\%$	$\neq$, $N \neq N_C$	2.823 V
sampled, ZOH filter, 1→46 V	close	14.54 V
sampled, FOH filter (19), 1→46 V	close	0.35 V

5.3. Seven algorithms on the LQI-weight space

Table 8 and Fig. 6(a) summarize the 180 runs of the CMO-LQI-PIDF family. 124 runs end feasible. All six branches converge to the same optimum: their best records lie between 0.8151 and 0.8153, a spread of 2×10^{-4} , and decode to practically the same controller. The LQI-weight space therefore has a single, well-defined optimum under the 33 inequalities, and the retained design is not an artefact of one operator or one seed. The retained record improves the normalized objective by 18.5 % with respect to the Bryson record ξ_0 , while ξ_0 itself violates the overshoot specification.

What separates the operators is reliability, not the optimum. The Friedman test over matched seeds rejects equality ($Q = 11.96$, $p = 0.035$); after Holm correction 1 pairwise difference remains (GA-pIGWO). pIGWO reaches a feasible design in 28 of 30 seeds and pAEABC in 25, against 13 for GA. The refinement stage matters most where the global stage is weakest: it raises the number of feasible runs from 8 to 17 for ABC and from 18 to 25 for pAEABC (Table 8), whereas it adds one run for pIGWO and none for PSO and GA. A practitioner who can afford only one run should therefore prefer the grey-wolf or adaptive-bee variant followed by refineBO; one who can afford a few seeds can use any of the six.

Retained controller. The retained weights are $\Delta_i = 10.842$ A, $\Delta_v = 3.301$ V, $\omega_B = 6505$ rad/s, giving $K = [0.090893, 0.165271, -945.806]$ and closed-loop poles -6493 and $-20149 \pm j17169$ rad/s. Its exact realization is

$$\theta^* = [K_p, K_i, K_d, N, b, c, K_b] = [0.17436, 945.81, 8.2629 \times 10^{-6}, 2 \times 10^5, 1, 0, 92951]. \quad (25)$$

Being an LQI law, it inherits the full-state LQR margins (minimum return difference 1, phase margin 70.25°), and the common- P certificate over the

Table 8: CMO–LQI–PIDF family: 30 matched seeds per algorithm (Algorithms 1–6, each followed by refineBO). J_s statistics over feasible runs; “global counts runs already feasible after the 240 global calls.

Algorithm	feasible	global	best J_s	median	IQR	mean rank
PSO	18/30	18/30	0.8152	0.8283	0.0208	3.77
GA	13/30	13/30	0.8151	0.8330	0.0190	4.23
ABC	17/30	8/30	0.8152	0.8163	0.0162	3.77
pAEABC	25/30	18/30	0.8151	0.8161	0.0177	2.77
pIGWO	28/30	27/30	0.8153	0.8308	0.0205	3.10
pIGWO-DLH	23/30	18/30	0.8152	0.8291	0.0256	3.37

operating polytope gives $\alpha_{cert} = 6414.8 \text{ rad/s}$ and $\zeta_{cert} = 0.7496$, i.e. 1.54 times the guaranteed decay rate of ξ_0 at slightly better guaranteed damping. None of these certificates is available for a gain vector found by direct search.

5.4. Does the LQI parameterization help? Six families, one protocol

Table 9 and Fig. 6(b) compare six families run under the identical protocol, so that the only difference between two rows is the space in which the seven algorithms search.

Same structure, different coordinates. PIDF-direct searches the same 2-DOF PIDF ($b = 1$, $c = 0$, $N = N_C$) directly in $(\log K_p, \log K_i, \log K_d, \log K_b)$ over the gain ranges spanned by the LQI box. It reaches the same optimum (best $J_s = 0.8154$ against 0.8151) with a similar number of feasible runs (129 against 124 of 180), and the paired comparison on the same (algorithm, seed) cells is not significant ($p = 0.74$). The LQI coordinates therefore do not make the search easier on this problem. What they change is what every candidate is. Inverting the map (14) and applying Kalman’s return-difference condition shows that the best direct-search design is itself LQ-optimal, $K = [0.0906, 0.1650, -943.2]$ with $\min_{\omega} |1 + L_K(j\omega)| = 1$, i.e. the gain search converges onto the LQ manifold; yet only 75 of its 129 feasible designs satisfy the condition, so 42 % of the controllers an equally lucky gain search may return carry no LQ optimality, no guaranteed margins and no reason to be certifiable. The LQI parameterization confines the search to that manifold from the first evaluation, at no cost in optimality.

Table 9: Controller families under the identical protocol (7 algorithms, 30 seeds, 300 calls, 33 inequalities). Paired comparison with CMO–LQI–PIDF on the same (algorithm, seed) cells: Deb-consistent score, two-sided Wilcoxon signed-rank test.

Family	variables	feasible runs	best J_s	median J_s (feasible)	CMO better / tie / worse	p	min. violation
CMO-LQI-PIDF	4 (LQI weights, K_b)	124/180	0.8151	0.8287	–	–	0.000
CMO-LQI-SF	4 (same, full state)	154/180	0.9054	0.9749	132 / 0 / 48	3.5×10^{-2}	0.000
PIDF-direct	4 (K_p, K_i, K_d, K_b)	129/180	0.8154	0.8273	99 / 0 / 81	7.4×10^{-1}	0.000
PIDF7-direct	7 (+ N, b, c)	163/180	0.8513	1.1018	121 / 0 / 59	7.7×10^{-1}	0.000
PID-direct	4	125/180	0.8249	0.8278	99 / 0 / 81	4.1×10^{-1}	0.000
PI-direct	3	0/180	–	–	180 / 0 / 0	2.7×10^{-31}	1.041

633 *Richer and poorer structures.* PID-direct (backward-difference derivative)
634 reaches best $J_s = 0.8249$ in 125 feasible runs and is not significantly dif-
635 ferent from CMO–LQI–PIDF ($p = 0.41$). PIDF7-direct, with free filter pole
636 and setpoint weights, finds more feasible runs (163) but a worse optimum
637 (0.8513), with $N = 141939$ rad/s, $b = 1.00$ and $c = 0.31$; on the switched mis-
638 sion this design holds the 1 V level with 0.0 mV of error and IAE 0.0348 V s,
639 i.e. the extra freedom buys switched robustness at the price of the averaged
640 objective. PI-direct never becomes feasible (minimum violation 1.04): a PI
641 cannot meet the overshoot, load-deviation and current specifications of the
642 six scenarios at once, and the paired comparison is decisive ($p = 2.7 \times 10^{-31}$).

643 *The full-state twin.* CMO–LQI–SF uses the same four variables but applies
644 the gain as a measured-state LQI. It is feasible more often (154 runs) but
645 at a worse averaged optimum (0.9054) than its output-feedback realization
646 ($p = 0.035$ in favour of the PIDF on the averaged objective). On the switched
647 mission the ordering reverses (Section 5.5): the twin is the more robust
648 controller at the 1 V level, which is the switched counterpart of the output-
649 current term of (17).

650 *What the protocol, rather than the parameterization, buys.* Every family tuned
651 under the constrained multi-fidelity protocol ends close to full compliance on
652 the reference mission (Table 10: u between 0.74 and 1.02; the lowest value
653 belongs to a slow PI whose IAE, 0.0943 V s, is 2.6 times that of the others),
654 whereas the six fixed-rule designs lie between 6.28 and 30.17. The decisive
655 ingredients are the engineering-unit specification and the switched transition
656 screen; the choice of search coordinates decides the guarantees that come
657 with the result.

Table 10: Switched replay on the 324 ms reference mission (24→1→46 V, 0.5 A load pulse). Specification ratios: overshoot/1.5 V, load deviation/0.5 V, peak i_L /23 A, worst steady error/25 mV, steady duty peak-to-peak/0.20; a ratio ≤ 1 meets the specification. u is the largest ratio. Energy residual below 4.5×10^{-6} % for every row.

Controller	IAE (Vs)	overshoot (V)	$i_{L,pk}$ (A)	$ e _{\max}$ (mV)	load dev. (V)	η (%)	E_{loss}/E_u	sat. frac.	u	specs met	sensors
CMO-LQI-PIDF (retained, v_o only)	0.0364	0.02	22.44	25.6	0.137	97.978	0.01801	0.089	1.02	4/5	v_o
CMO-LQI-SF (twin, measured i_L)	0.0347	0.02	22.87	0.0	0.214	97.978	0.01800	0.008	0.99	5/5	v_o, i_L, i_C
PIDF, direct gain search	0.0363	0.02	22.42	25.0	0.137	97.978	0.01801	0.089	1.00	5/5	v_o
PIDF7, direct search	0.0348	0.02	22.11	0.0	0.164	97.978	0.01800	0.011	0.96	5/5	v_o
PID, direct search	0.0368	0.02	21.83	23.7	0.138	97.980	0.01798	0.087	0.95	5/5	v_o
PI, direct search	0.0943	0.23	6.04	6.8	0.369	97.987	0.01786	0.009	0.74	5/5	v_o
Bryson LQI-PIDF ξ_0	0.0340	8.05	32.50	0.0	0.193	97.936	0.01845	0.012	5.37	3/5	v_o
PI (loop shaping)	0.0480	26.63	40.78	0.1	0.474	97.813	0.01972	0.012	17.76	3/5	v_o
PID (pole-zero)	0.0467	28.64	40.77	11.3	0.128	97.802	0.01984	0.093	19.09	3/5	v_o
PIDF (Type III)	0.0453	28.65	40.78	0.0	0.157	97.801	0.01986	0.013	19.10	3/5	v_o
LQR	0.1339	0.97	24.36	754.3	0.805	97.969	0.01811	0.001	30.17	2/5	v_o, i_L, i_C
LQG	0.0716	0.28	24.39	289.5	0.466	97.960	0.01818	0.000	11.58	3/5	v_o
LQI (discrete, full state)	0.0348	9.41	32.61	0.0	0.552	97.931	0.01849	0.013	6.28	2/5	v_o, i_L, i_C

5.5. Switched validation on the reference mission

Table 10 and Fig. 7 report the frozen controllers on the 324 ms mission of the reference model. The energy balance closes to better than 4.5×10^{-6} % of the input energy for every row, so all efficiency and loss figures are resolved by the integrator. As a fidelity check against the Simulink audit of the earlier version of this study, the replica gives for the fixed PI 26.63 V of overshoot, 40.78 A and IAE 0.0480 Vs (Simulink: 26.75 V, 40.76 A, 0.0464 Vs) and for the fixed LQI 9.41 V, 32.61 A and 0.0348 Vs (Simulink: 9.56 V, 31.27 A, 0.0346 Vs).

Answer to the comparison question. Against the six classical designs the result is unambiguous on the specification, and nuanced on individual indices.

- *PI, PID and PIDF* designed by standard frequency-domain rules hold every level but overshoot the 1→46 V step by 26.63–28.65 V and draw about 40.78 A, i.e. 1.8 times the 23 A device rating; their specification ratios are 17.76–19.10.
- *LQR and LQG*, having no integral action, leave offsets of 754.3 and 289.5 mV at the worst level.
- *LQI*, synthesized from the same Bryson limits and reading the full state, tracks well (IAE 0.0348 Vs) but overshoots by 9.41 V and peaks at 32.61 A.
- The retained *CMO-LQI-PIDF*, reading v_o only, removes the overshoot, stays at 22.44 A, keeps the load deviation at 0.137 V and converts at

97.978 %, against 97.80–97.97 % for the six fixed-rule designs. Its IAE, 0.0364 Vs, is within 5 % of the LQI and 7 % of ξ_0 , whose lower IAE is bought with 8–9 V of overshoot. It misses one of the five mission specifications by 0.6 mV: 25.6 mV of steady error at 1 V for a 25 mV limit ($u = 1.02$).

- Its full-state twin *CMO–LQI–SF*, with the same weights and a measured inductor current, meets all five specifications ($u = 0.99$) with IAE 0.0347 Vs.

The procedure is therefore superior to the six classical design rules in the sense that matters to an industrial user: every controller it returns, in any of the tuned families of Table 9, removes the overshoot, stays within the device rating and holds the levels, with specification ratios between 0.74 and 1.02 against 6.28–30.17 for PI, PID, PIDF, LQR, LQG and LQI. It does not dominate every index: the LQI and ξ_0 track slightly better in IAE, at the cost of 8–9 V of overshoot and 32–33 A of peak current. The retained CMO–LQI–PIDF and its direct-search counterpart are practically the same controller (IAE 0.0364 and 0.0363 Vs), and their 1 V steady error sits on the 25 mV line (25.6 and 25.0 mV); this level is the binding one, which the switched screen resolves only to within a millivolt because it is a shorter transient than the mission.

The value of the current sensor. Among the LQI-structured controllers, the full-state twin meets every specification and the output-feedback realization misses one by 0.6 mV. By Proposition 2 the two differ only by the term $-K_{ix}(i_o - v_o/R)$ of (17), an instantaneous feedback on the unmodelled output current. At 1 V in discontinuous conduction the output-current estimate v_o/R is least accurate relative to the signal, and the PIDF must remove the resulting bias through its integrator in the presence of a switching limit cycle; the twin removes it directly. The gap between the two rows of Table 10 is thus the measured dividend of one current sensor, predicted in sign and location by the theory. The efficiencies of all tuned designs agree within 0.01 percentage point (97.978–97.987 %), so the conversion loss does not discriminate between them; it does separate them from the fixed-rule designs, whose overshoots and current peaks cost 0.01–0.18 percentage point.

5.6. Limitations

The evidence is simulated. The switched replica reproduces the controller-independent figures of the reference Simulink model and its fixed compara-

tors, but the final numbers of Table 10 should be regenerated on the `.slx` with the provided S-function before being quoted as Simulink results. Losses are the modelled conduction and snubber losses of the declared boundary; dynamic switching loss, reverse recovery, magnetic and thermal effects are outside it, and the efficiency differences between rows (a few hundredths of a percentage point) are far below the accuracy of a laboratory power analyser. Component tolerances were not supplied and are not claimed: the common- P certificate covers the nominal operating polytope only. The mission and the specification are those of a fixed 48 V source; line regulation is outside the study. Finally, the specification set and the filter discretization were revised during pilot campaigns that are reported in Section 4 and Appendix B; the final campaign was run once, with the protocol frozen, and its switched validation was not used for selection.

6. Conclusions

A formula-first co-design was carried out for a non-ideal asynchronous Buck converter supplied at 48 V and commanded over 1 V to 46 V. Its search space is the set of Bryson excursions of an LQI cost, so every evaluated point is a Riccati-optimal law with LQR margins and an operating-polytope certificate, and every point is implemented exactly as a 2-DOF PIDF that measures the output voltage only.

Three results carry the paper.

Theory. The realization is structural, not only nominal: the derivative filter of the PIDF, with its pole at the ESR zero, reconstructs the capacitor voltage along every trajectory of the converter, so the PIDF and the full-state LQI coincide under saturation, anti-windup and discontinuous conduction and for any inductor-branch or semiconductor parameters. They differ only by an explicit feedback on the unmodelled output current, by a mismatch of the output network, and by sampling. Under sampling the equivalence survives when the filter is discretized as the observer it is: a triangle-hold update keeps the sampled PIDF within 0.35 V of the sampled LQI on a 45 V step, where the usual zero-order-hold update departs by 14.54 V.

Optimization. Seven algorithms applied to the four LQI weights converge to one optimum; they differ in reliability, pIGWO and pAEABC reaching feasibility in 28 and 25 of 30 seeds against 13 for GA, and the Gaussian-process refinement matters most where the global stage is weakest. Searching the same 2-DOF PIDF directly in gain space reaches the same optimum, which

turns out to be LQ-optimal; the LQI parameterization does not accelerate the search on this problem, but it confines it to the manifold on which the optimum lies and gives every candidate its margins and certificate, whereas 42% of the feasible direct-search designs are not LQ-optimal for any weight.

Validation. Switched admissibility is not inherited from an averaged model: an analytical ripple bound and a steady switched screen both admitted designs that limit-cycle on the reference mission, because the loop holds coexisting switching limit cycles selected by the preceding transient. A 34 ms switched transition screen inside the search removes them. On the reference mission, the retained CMO–LQI–PIDF removes the overshoot of the classical designs and stays within the 23 A device rating; its only miss is a steady error of 25.6 mV at 1 V against a 25 mV limit, which its full-state twin meets. PI, PID, PIDF, LQR, LQG and LQI designed by their standard rules exceed at least two specifications by factors of 6 to 30.

The contribution is therefore a design procedure an industrial engineer can apply with standard tools: choose admissible excursions, solve one Riccati equation, realize the gain as a PIDF with setpoint weight one and a derivative pole on the ESR zero, discretize the filter as a capacitor-voltage observer, and let a small, constrained, multi-fidelity search tune four physically meaningful numbers. Hardware validation, component-tolerance robustness and line regulation are the next evidence levels.

Appendix A. Reproducibility record

Reference model. buck fo lqi fixed reference v6_1.46V_R2022a.slx, SHA-256 948fbae2679b57ed726a92eeebcae398aaf0ca6b9b3a74216759ca80b390c7fe. All plant, mission and logging parameters of Table 3 were decoded from its model workspace; the snubber is resistive ($R_s = 100 \text{ k}\Omega$, $C_s = \infty$) on the MOSFET only, the diode snubber is disabled, and the MOSFET body diode has $R_d = 0.01 \Omega$, $V_{fd} = 0$. The saved model initializes L at 1.2 A and C at 12 V; all replays of this paper start at the 24 V equilibrium (2.4 A, 24 V).

Commands. From the repository root:

```
python scripts/cmo_formula_first.py    # Sections 3-4, Prop. 2 tests
python scripts/cmo_campaign.py          # 6 families x 6 methods x 30 seeds
python scripts/cmo_analyze.py           # statistics, freeze, switched replay
python scripts/cmo_figures.py; python scripts/cmo_numbers.py
```

In MATLAB (R2022a or later, Simscape Electrical, Control System Toolbox):

```
788 cmo_formula_first
789 T = run_cmo_validation(slx, 'results/cmo/controllers.csv');
```

790 The second call replaces only the controller S-function (`cmo_sfun`, a line-
791 by-line port of `cmo/ctrl.py`) and never saves the model.

792 *Seeds and budgets.* Seeds 2026091201, ..., 2026091230; population 12; 240
793 global and 60 refineBO calls per run; 30 runs per method and family. Each
794 checkpoint stores the method, seed, best decision vector, objective, the 33
795 inequalities, the global-stage record and the best-so-far curve.

796 **Appendix B. Protocol changes with respect to the earlier version**

797 **Data availability**

798 All code (Python replica, evaluator, algorithms, analysis, figures), the
799 MATLAB S-function and replay script for the reference Simulink model,
800 the per-run checkpoints and the generated tables are archived with the
801 manuscript repository; a public DOI will be assigned at acceptance.

802 **Declaration of competing interest**

803 The authors declare that they have no known competing financial inter-
804 ests or personal relationships that could have appeared to influence the work
805 reported in this paper.

806 **References**

- 807 [1] Abdelmalek, S., Dali, A., Bakdi, A., Bettayeb, M., 2020. Design and
808 experimental implementation of a new robust observer-based nonlinear
809 controller for DC–DC buck converters. *Energy* 213, 118816. doi:[10.1016/j.energy.2020.118816](https://doi.org/10.1016/j.energy.2020.118816).
810
- 811 [2] Alsamia, S., Koch, E., Albedran, H., Ray, R., 2024. Adaptive explo-
812 ration artificial bee colony for mathematical optimization. *AI* 5, 2218–
813 2236. doi:[10.3390/ai5040109](https://doi.org/10.3390/ai5040109).
- 814 [3] Anderson, B.D.O., Moore, J.B., 1990. *Optimal Control: Linear*
815 *Quadratic Methods*. Prentice Hall, Englewood Cliffs, NJ.

- 816 [4] Ang, K.H., Chong, G., Li, Y., 2005. PID control system analysis, design,
817 and technology. *IEEE Transactions on Control Systems Technology* 13,
818 559–576. doi:[10.1109/TCST.2005.847331](https://doi.org/10.1109/TCST.2005.847331).
- 819 [5] Åström, K.J., Hägglund, T., 2001. The future of PID control. *Control Engineering Practice* 9, 1163–1175. doi:[10.1016/S0967-0661\(01\)](https://doi.org/10.1016/S0967-0661(01)00062-4)
820 [00062-4](https://doi.org/10.1016/S0967-0661(01)00062-4).
821
- 822 [6] Åström, K.J., Hägglund, T., 2006. *Advanced PID Control*. ISA – The
823 Instrumentation, Systems, and Automation Society, Research Triangle
824 Park, NC.
- 825 [7] Åström, K.J., Rundqwist, L., 1989. Integrator windup and how
826 to avoid it, in: 1989 American Control Conference, pp. 1693–1698.
827 doi:[10.23919/ACC.1989.4790464](https://doi.org/10.23919/ACC.1989.4790464).
- 828 [8] Athans, M., 1971. The role and use of the stochastic linear-quadratic-
829 Gaussian problem in control system design. *IEEE Transactions on Au-*
830 *tomatic Control* 16, 529–552. doi:[10.1109/TAC.1971.1099818](https://doi.org/10.1109/TAC.1971.1099818).
- 831 [9] Bianchi, F.D., Mantz, R.J., Christiansen, C.F., 2008. Multivariable PID
832 control with set-point weighting via BMI optimisation. *Automatica* 44,
833 472–478. doi:[10.1016/j.automatica.2007.05.021](https://doi.org/10.1016/j.automatica.2007.05.021).
- 834 [10] Bouchama, Z., Khatir, A., Benagguene, S., Harmas, M.N., 2020. Design
835 and experimental validation of an intelligent controller for DC–DC buck
836 converters. *Journal of the Franklin Institute* 357, 10353–10366. doi:[10.](https://doi.org/10.1016/j.jfranklin.2020.08.011)
837 [1016/j.jfranklin.2020.08.011](https://doi.org/10.1016/j.jfranklin.2020.08.011).
- 838 [11] Bryson, A.E., Ho, Y.C., 1975. *Applied Optimal Control: Optimization,*
839 *Estimation, and Control*. Hemisphere, Washington, DC.
- 840 [12] Buso, S., Mattavelli, P., 2015. *Digital Control in Power Electronics*. 2
841 ed., Morgan & Claypool, San Rafael, CA.
- 842 [13] Chilali, M., Gahinet, P., 1996. H_∞ design with pole placement con-
843 straints: An LMI approach. *IEEE Transactions on Automatic Control*
844 41, 358–367. doi:[10.1109/9.486637](https://doi.org/10.1109/9.486637).
- 845 [14] Coutinho, J.P.L., Santos, L.O., Reis, M.S., 2023. Bayesian optimization
846 for automatic tuning of digital multi-loop PID controllers. *Computers &*

- 847 Chemical Engineering 173, 108211. doi:[10.1016/j.compchemeng.2023.](https://doi.org/10.1016/j.compchemeng.2023.108211)
848 [108211](https://doi.org/10.1016/j.compchemeng.2023.108211).
- 849 [15] Davison, E.J., 1976. The robust control of a servomechanism problem
850 for linear time-invariant multivariable systems. IEEE Transactions on
851 Automatic Control 21, 25–34.
- 852 [16] Deb, K., 2000. An efficient constraint handling method for genetic algo-
853 rithms. Computer Methods in Applied Mechanics and Engineering 186,
854 311–338. doi:[10.1016/S0045-7825\(99\)00389-8](https://doi.org/10.1016/S0045-7825(99)00389-8).
- 855 [17] Demšar, J., 2006. Statistical comparisons of classifiers over multiple
856 data sets. Journal of Machine Learning Research 7, 1–30. URL: [https:](https://www.jmlr.org/papers/v7/demsar06a.html)
857 [//www.jmlr.org/papers/v7/demsar06a.html](https://www.jmlr.org/papers/v7/demsar06a.html).
- 858 [18] Derrac, J., García, S., Molina, D., Herrera, F., 2011. A practical tutorial
859 on the use of nonparametric statistical tests as a methodology for com-
860 paring evolutionary and swarm intelligence algorithms. Swarm and Evo-
861 lutionary Computation 1, 3–18. doi:[10.1016/j.swevo.2011.02.002](https://doi.org/10.1016/j.swevo.2011.02.002).
- 862 [19] Doyle, J.C., 1978. Guaranteed margins for LQG regulators. IEEE Trans-
863 actions on Automatic Control 23, 756–757. doi:[10.1109/TAC.1978.](https://doi.org/10.1109/TAC.1978.1101812)
864 [1101812](https://doi.org/10.1109/TAC.1978.1101812).
- 865 [20] Doyle, J.C., Stein, G., 1979. Robustness with observers. IEEE Trans-
866 actions on Automatic Control 24, 607–611. doi:[10.1109/TAC.1979.](https://doi.org/10.1109/TAC.1979.1102095)
867 [1102095](https://doi.org/10.1109/TAC.1979.1102095).
- 868 [21] Erickson, R.W., Maksimović, D., 2020. Fundamentals of Power Elec-
869 tronics. 3 ed., Springer. doi:[10.1007/978-3-030-43881-4](https://doi.org/10.1007/978-3-030-43881-4).
- 870 [22] Eriksson, D., Pearce, M., Gardner, J.R., Turner, R., Poloczek, M., 2019.
871 Scalable global optimization via local Bayesian optimization, in: Ad-
872 vances in Neural Information Processing Systems, pp. 5496–5507.
- 873 [23] Francis, B.A., Wonham, W.M., 1976. The internal model principle of
874 control theory. Automatica 12, 457–465. doi:[10.1016/0005-1098\(76\)](https://doi.org/10.1016/0005-1098(76)90006-6)
875 [90006-6](https://doi.org/10.1016/0005-1098(76)90006-6).

- 876 [24] Gardner, J.R., Kusner, M.J., Xu, Z., Weinberger, K.Q., Cunningham,
877 J.P., 2014. Bayesian optimization with inequality constraints, in: Pro-
878 ceedings of the 31st International Conference on Machine Learning, pp.
879 937–945. URL: [https://proceedings.mlr.press/v32/gardner14.](https://proceedings.mlr.press/v32/gardner14.html)
880 [html](https://proceedings.mlr.press/v32/gardner14.html).
- 881 [25] Geyer, T., Papafotiou, G., Morari, M., 2008. Hybrid model predictive
882 control of the step-down DC–DC converter. *IEEE Transactions on Con-*
883 *trol Systems Technology* 16, 1112–1124.
- 884 [26] Holland, J.H., 1975. *Adaptation in Natural and Artificial Systems*. Uni-
885 *versity of Michigan Press, Ann Arbor, MI*.
- 886 [27] Horowitz, I.M., 1963. *Synthesis of Feedback Systems*. Academic Press,
887 *New York*.
- 888 [28] Hou, Y., Gao, H., Wang, Z., Du, C., 2022. Improved grey wolf opti-
889 mization algorithm and application. *Sensors* 22, 3810. doi:[10.3390/](https://doi.org/10.3390/s22103810)
890 [s22103810](https://doi.org/10.3390/s22103810).
- 891 [29] Infineon Technologies AG, 2026. IRF540NPbF data sheet.
892 URL: [https://www.infineon.com/assets/row/public/documents/](https://www.infineon.com/assets/row/public/documents/24/49/infineon-irf540n-datasheet-en.pdf)
893 [24/49/infineon-irf540n-datasheet-en.pdf](https://www.infineon.com/assets/row/public/documents/24/49/infineon-irf540n-datasheet-en.pdf). revision 2.1.
- 894 [30] Izci, D., Ekinici, S., Hekimoğlu, B., 2022. A new artificial ecosystem-
895 based optimization integrated with Nelder–Mead method for PID con-
896 troller design of buck converter. *Alexandria Engineering Journal* 61,
897 2030–2044. doi:[10.1016/j.aej.2021.07.037](https://doi.org/10.1016/j.aej.2021.07.037).
- 898 [31] Jones, D.R., Schonlau, M., Welch, W.J., 1998. Efficient global optimiza-
899 tion of expensive black-box functions. *Journal of Global Optimization*
900 13, 455–492. doi:[10.1023/A:1008306431147](https://doi.org/10.1023/A:1008306431147).
- 901 [32] Kalman, R.E., 1960. Contributions to the theory of optimal control.
902 *Boletín de la Sociedad Matemática Mexicana* 5, 102–119.
- 903 [33] Kalman, R.E., 1964. When is a linear control system optimal? *Journal*
904 *of Basic Engineering* 86, 51–60. doi:[10.1115/1.3653115](https://doi.org/10.1115/1.3653115).

- 905 [34] Karaboga, D., Basturk, B., 2007. A powerful and efficient algorithm
906 for numerical function optimization: Artificial bee colony (ABC) al-
907 gorithm. *Journal of Global Optimization* 39, 459–471. doi:[10.1007/
908 s10898-007-9149-x](https://doi.org/10.1007/s10898-007-9149-x).
- 909 [35] Karaboga, D., Basturk, B., 2008. On the performance of artificial bee
910 colony (ABC) algorithm. *Applied Soft Computing* 8, 687–697. doi:[10.
911 1016/j.asoc.2007.05.007](https://doi.org/10.1016/j.asoc.2007.05.007).
- 912 [36] Kazimierzuk, M.K., 2015. Pulse-Width Modulated DC–DC Power Con-
913 verters. 2 ed., Wiley, Chichester. doi:[10.1002/9781119009597](https://doi.org/10.1002/9781119009597).
- 914 [37] Kennedy, J., Eberhart, R., 1995. Particle swarm optimization, in: Pro-
915 ceedings of ICNN’95 – International Conference on Neural Networks,
916 pp. 1942–1948. doi:[10.1109/ICNN.1995.488968](https://doi.org/10.1109/ICNN.1995.488968).
- 917 [38] Kothare, M.V., Campo, P.J., Morari, M., Nett, C.N., 1994. A unified
918 framework for the study of anti-windup designs. *Automatica* 30, 1869–
919 1883. doi:[10.1016/0005-1098\(94\)90048-5](https://doi.org/10.1016/0005-1098(94)90048-5).
- 920 [39] Krein, P.T., Bentsman, J., Bass, R.M., Lesieutre, B.L., 1990. On the
921 use of averaging for the analysis of power electronic systems. *IEEE*
922 *Transactions on Power Electronics* 5, 182–190.
- 923 [40] Leung, F.H.F., Tam, P.K.S., Li, C.K., 1991. The control of switching
924 DC–DC converters—a general LQR problem. *IEEE Transactions on*
925 *Industrial Electronics* 38, 65–71.
- 926 [41] Liu, Z., Xie, L., Bemporad, A., Lu, S., 2018. Fast linear parameter vary-
927 ing model predictive control of buck DC–DC converters based on FPGA.
928 *IEEE Access* 6, 52434–52446. doi:[10.1109/ACCESS.2018.2869043](https://doi.org/10.1109/ACCESS.2018.2869043).
- 929 [42] Maksimović, D., Stanković, A.M., Thottuvelil, V.J., Verghese, G.C.,
930 2001. Modeling and simulation of power electronic converters. *Proceed-*
931 *ings of the IEEE* 89, 898–912.
- 932 [43] Mezura-Montes, E., Coello Coello, C.A., 2011. Constraint-handling
933 in nature-inspired numerical optimization: Past, present and future.
934 *Swarm and Evolutionary Computation* 1, 173–194. doi:[10.1016/j.
935 swevo.2011.10.001](https://doi.org/10.1016/j.swevo.2011.10.001).

- 936 [44] Middlebrook, R.D., Čuk, S., 1976. A general unified approach to mod-
 937 elling switching-converter power stages, in: 1976 IEEE Power Electron-
 938 ics Specialists Conference, pp. 18–34. doi:[10.1109/PESC.1976.7072895](https://doi.org/10.1109/PESC.1976.7072895).
- 939 [45] Minorsky, N., 1922. Directional stability of automatically steered bod-
 940 ies. *Journal of the American Society for Naval Engineers* 34, 280–309.
 941 doi:[10.1111/j.1559-3584.1922.tb04958.x](https://doi.org/10.1111/j.1559-3584.1922.tb04958.x).
- 942 [46] Mirjalili, S., Mirjalili, S.M., Lewis, A., 2014. Grey wolf optimizer. *Ad-
 943 vances in Engineering Software* 69, 46–61. doi:[10.1016/j.advengsoft.](https://doi.org/10.1016/j.advengsoft.2013.12.007)
 944 [2013.12.007](https://doi.org/10.1016/j.advengsoft.2013.12.007).
- 945 [47] Nadimi-Shahraki, M.H., Taghian, S., Mirjalili, S., 2021. An improved
 946 grey wolf optimizer for solving engineering problems. *Expert Systems
 947 with Applications* 166, 113917. doi:[10.1016/j.eswa.2020.113917](https://doi.org/10.1016/j.eswa.2020.113917).
- 948 [48] Nanyan, N.F., Ahmad, M.A., Hekimoğlu, B., 2024. Optimal PID
 949 controller for the DC–DC buck converter using the improved sine
 950 cosine algorithm. *Results in Control and Optimization* 14, 100352.
 951 doi:[10.1016/j.rico.2023.100352](https://doi.org/10.1016/j.rico.2023.100352).
- 952 [49] Neri, F., Cotta, C., 2012. Memetic algorithms and memetic computing
 953 optimization: A literature review. *Swarm and Evolutionary Computa-
 954 tion* 2, 1–14. doi:[10.1016/j.swevo.2011.11.003](https://doi.org/10.1016/j.swevo.2011.11.003).
- 955 [50] Neumann-Brosig, M., Marco, A., Schwarzmann, D., Trimpe, S., 2020.
 956 Data-efficient autotuning with Bayesian optimization: An industrial
 957 control study. *IEEE Transactions on Control Systems Technology* 28,
 958 730–740. doi:[10.1109/TCST.2018.2886159](https://doi.org/10.1109/TCST.2018.2886159).
- 959 [51] Olalla, C., Leyva, R., El Aroudi, A., Queinnec, I., 2009. Robust LQR
 960 control for PWM converters: An LMI approach. *IEEE Transactions on
 961 Industrial Electronics* 56, 2548–2558. doi:[10.1109/TIE.2009.2017556](https://doi.org/10.1109/TIE.2009.2017556).
- 962 [52] Peng, H., Prodić, A., Alarcón, E., Maksimović, D., 2007. Modeling
 963 of quantization effects in digitally controlled DC–DC converters. *IEEE
 964 Transactions on Power Electronics* 22, 208–215.
- 965 [53] Peterchev, A.V., Sanders, S.R., 2003. Quantization resolution and limit
 966 cycling in digitally controlled PWM converters. *IEEE Transactions on
 967 Power Electronics* 18, 301–308. doi:[10.1109/TPEL.2002.807092](https://doi.org/10.1109/TPEL.2002.807092).

- [54] Poli, R., Kennedy, J., Blackwell, T., 2007. Particle swarm optimization: An overview. *Swarm Intelligence* 1, 33–57. doi:[10.1007/s11721-007-0002-0](https://doi.org/10.1007/s11721-007-0002-0).
- [55] Rasmussen, C.E., Williams, C.K.I., 2006. *Gaussian Processes for Machine Learning*. MIT Press, Cambridge, MA.
- [56] Rodríguez-Molina, A., Mezura-Montes, E., Villarreal-Cervantes, M.G., Aldape-Pérez, M., 2020. Multi-objective meta-heuristic optimization in intelligent control: A survey on the controller tuning problem. *Applied Soft Computing* 93, 106342. doi:[10.1016/j.asoc.2020.106342](https://doi.org/10.1016/j.asoc.2020.106342).
- [57] Safonov, M.G., Athans, M., 1977. Gain and phase margin for multiloop LQG regulators. *IEEE Transactions on Automatic Control* 22, 173–179. doi:[10.1109/TAC.1977.1101470](https://doi.org/10.1109/TAC.1977.1101470).
- [58] Shahriari, B., Swersky, K., Wang, Z., Adams, R.P., de Freitas, N., 2016. Taking the human out of the loop: A review of Bayesian optimization. *Proceedings of the IEEE* 104, 148–175. doi:[10.1109/JPROC.2015.2494218](https://doi.org/10.1109/JPROC.2015.2494218).
- [59] Siano, P., Citro, C., 2014. Designing fuzzy logic controllers for DC–DC converters using multi-objective particle swarm optimization. *Electric Power Systems Research* 112, 74–83. doi:[10.1016/j.epsr.2014.03.010](https://doi.org/10.1016/j.epsr.2014.03.010).
- [60] Siddhartha, V., Hote, Y.V., Saxena, S., 2018. Non-ideal modelling and IMC based PID controller design of PWM DC–DC buck converter. *IFAC-PapersOnLine* 51, 639–644. doi:[10.1016/j.ifacol.2018.06.168](https://doi.org/10.1016/j.ifacol.2018.06.168).
- [61] Sitbon, M., Aharon, I., Averbukh, M., Baimel, D., Sassonker, M., 2020. Disturbance observer based robust voltage control of photovoltaic generator interfaced by current mode buck converter. *Energy Conversion and Management* 209, 112622. doi:[10.1016/j.enconman.2020.112622](https://doi.org/10.1016/j.enconman.2020.112622).
- [62] Snoek, J., Larochelle, H., Adams, R.P., 2012. Practical Bayesian optimization of machine learning algorithms, in: *Advances in Neural Information Processing Systems*. URL: https://proceedings.neurips.cc/paper_files/paper/2012/hash/05311655a15b75fab86956663e1819cd-Abstract.html.

- 1001 [63] Sörensen, K., 2015. Metaheuristics—the metaphor exposed. Interna-
1002 tional Transactions in Operational Research 22, 3–18. doi:[10.1111/
1003 itor.12001](https://doi.org/10.1111/itor.12001).
- 1004 [64] STMicroelectronics, 2023. STPST10H100: 100 V–10 A power Schottky
1005 trench diode, data sheet. URL: [https://www.st.com/resource/en/
1006 datasheet/stpst10h100.pdf](https://www.st.com/resource/en/datasheet/stpst10h100.pdf).
- 1007 [65] Sun, J., Mitchell, D.M., Greuel, M.F., Krein, P.T., Bass, R.M., 2001.
1008 Averaged modeling of PWM converters operating in discontinuous con-
1009 duction mode. IEEE Transactions on Power Electronics 16, 482–492.
1010 doi:[10.1109/63.931052](https://doi.org/10.1109/63.931052).
- 1011 [66] Tan, S.C., Lai, Y.M., Tse, C.K., 2008. General design issues of sliding-
1012 mode controllers in DC–DC converters. IEEE Transactions on Industrial
1013 Electronics 55, 1160–1174.
- 1014 [67] Valencia-Rivera, G.H., Benavides-Robles, M.T., Vela Morales, A.,
1015 Amaya, I., Cruz-Duarte, J.M., Ortiz-Bayliss, J.C., Aviña-Cervantes,
1016 J.G., 2024. A systematic review of metaheuristic algorithms in elec-
1017 tric power systems optimization. Applied Soft Computing 150, 111047.
1018 doi:[10.1016/j.asoc.2023.111047](https://doi.org/10.1016/j.asoc.2023.111047).
- 1019 [68] Wolpert, D.H., Macready, W.G., 1997. No free lunch theorems for op-
1020 timization. IEEE Transactions on Evolutionary Computation 1, 67–82.
1021 doi:[10.1109/4235.585893](https://doi.org/10.1109/4235.585893).
- 1022 [69] Young, P.C., Willems, J.C., 1972. An approach to the linear multi-
1023 variable servomechanism problem. International Journal of Control 15,
1024 961–979. doi:[10.1080/00207177208932211](https://doi.org/10.1080/00207177208932211).
- 1025 [70] Ziegler, J.G., Nichols, N.B., 1942. Optimum settings for automatic
1026 controllers. Transactions of the ASME 64, 759–768. doi:[10.1115/1.
1027 4019264](https://doi.org/10.1115/1.4019264).

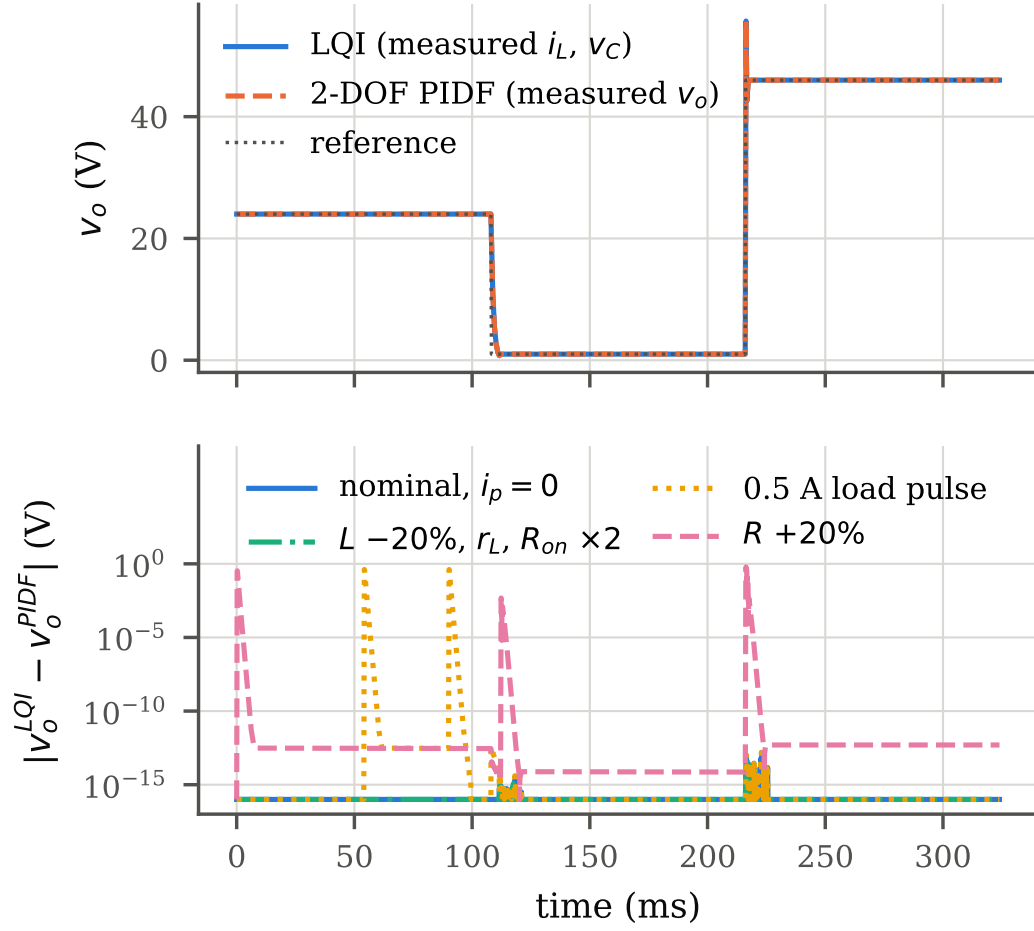


Figure 5: Top: LQI with measured (i_L, v_C) and its 2-DOF PIDF with measured v_o on the reference mission (continuous time, averaged nonlinear plant, saturation active). Bottom: absolute output difference; the nominal and inductor-branch-mismatch curves lie at the floating-point floor, the load-pulse and load-mismatch curves show the predicted departures.

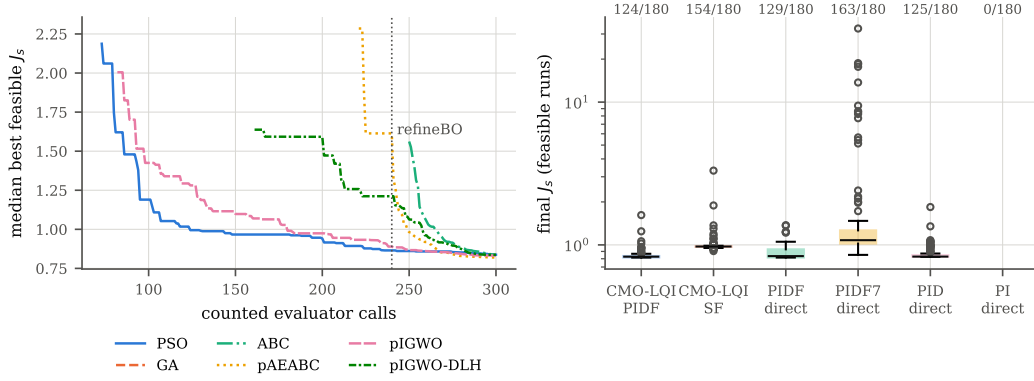


Figure 6: (a) Median best-feasible objective against counted calls for the CMO-LQI-PIDF family (dotted line: end of the global stage); a curve starts once at least half of the 30 seeds hold a feasible record, which GA never achieves (13/30). (b) Final objective of the feasible runs of every family under the identical protocol, with the number of feasible runs out of 180 above each box.

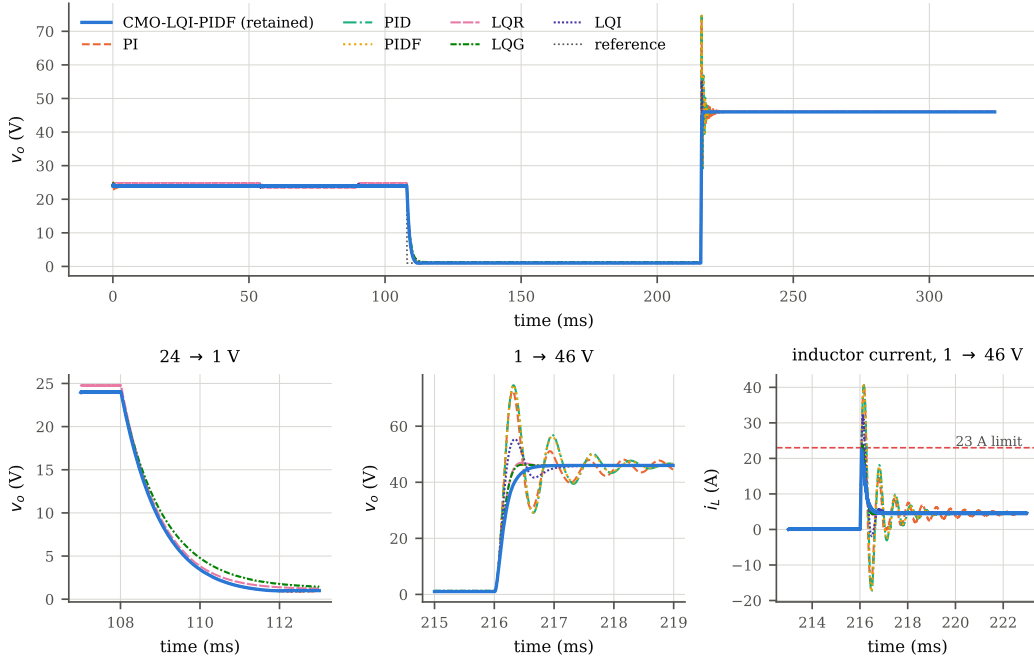


Figure 7: Switched replay on the reference mission: retained CMO-LQI-PIDF and the six fixed-rule comparators. Bottom: 24→1 V and 1→46 V transitions and the inductor current on the 1→46 V step against the 23 A device limit.

Table B.1: Declared changes and their reasons.

Change	Reason
Feasibility in engineering units instead of ratios to ξ_0	with ratio gates 24 of 36 constraints are active at ξ_0 , and a gentle record leaves no dominating candidate; absolute gates make all families comparable
Analytical ripple bound $\rightarrow$ switched transition screen (g_{31} – g_{33})	pilots 1 and 2: the bound and a steady screen both admitted limit-cycling designs (Section 4)
Device current limit 23 A (IRF540N at 100 °C)	the earlier retained design used 90 % of the 25 °C rating
refineBO budget stated once: 60 calls	the earlier text gave both 20 and 60
Structural equivalence (Prop. 2)	replaces the claim that saturation, DCM and PWM break the realization
Triangle-hold (FOH) discretization of the derivative filter, Eq. (19)	the ZOH filter makes the sampled PIDF deviate by up to 14.54 V from the sampled LQI on the 1 $\rightarrow$ 46 V step; FOH reduces it to 0.35 V (identified by the equivalence audit, before the final campaign)
Useful-energy band reported, not constrained	ill-posed on step-down transients of an asynchronous converter (Section 4); identified before the final campaign
Six added families and six fixed-rule comparators on one specification	separates parameterization from optimizer