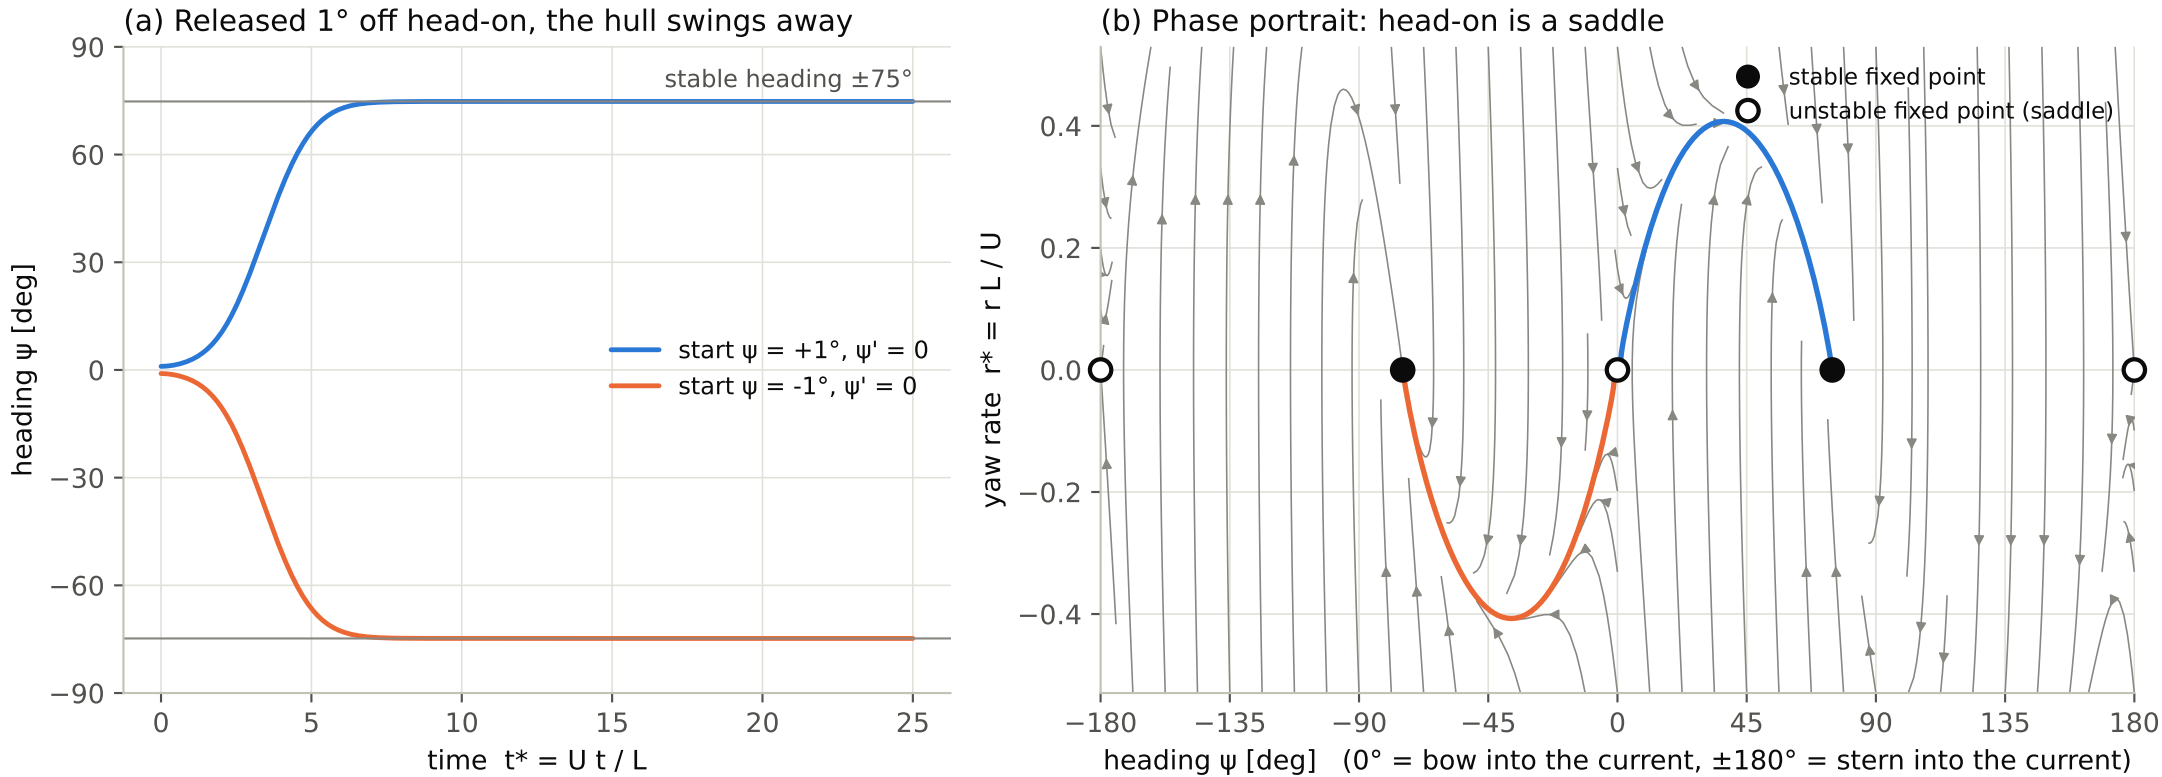Bare hull held by a pin at midship (no hawser), 100 % load