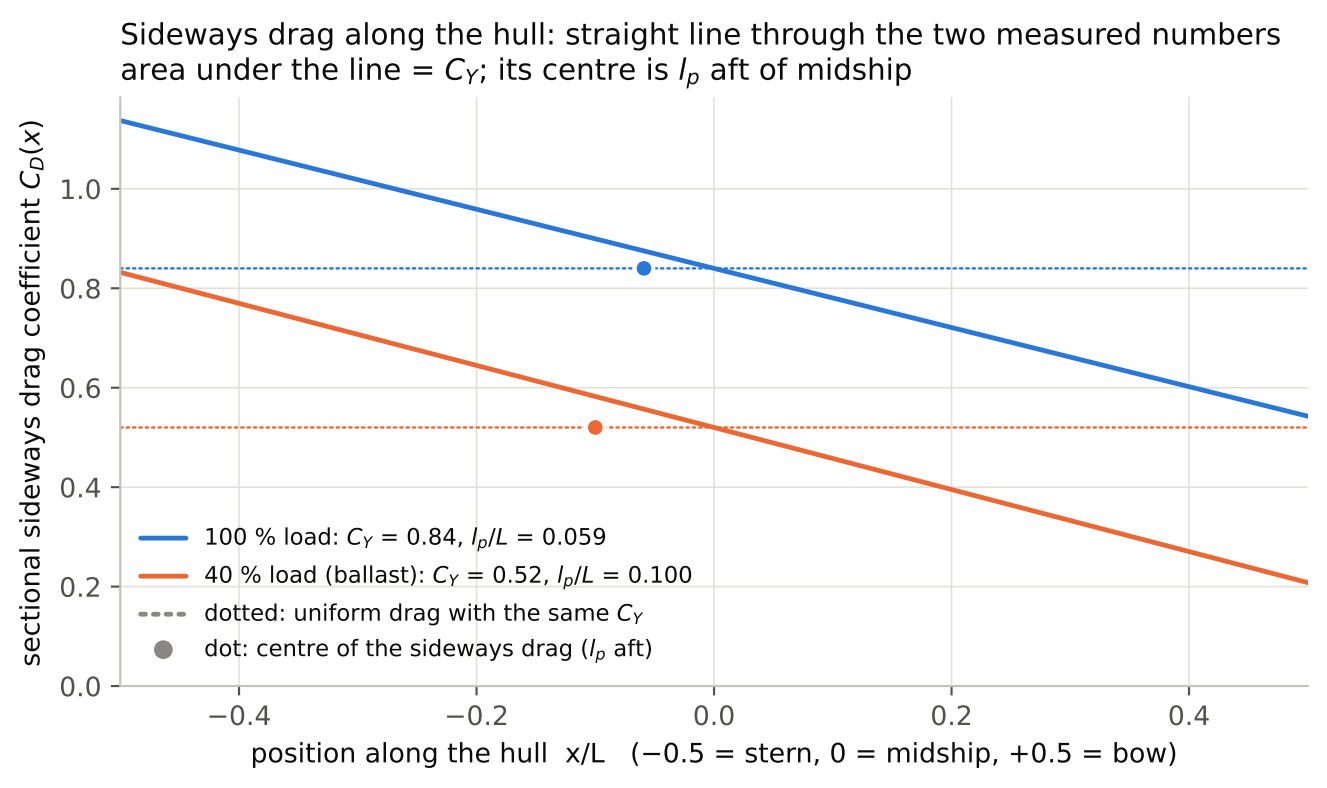
Sideways drag along the hull: straight line through the two measured numbers
area under the line = C_Y; its centre is l_p aft of midship
sectional sideways drag coefficient $C_D(x)$
1.0
0.8
0.6
0.4
0.2
0.0
−0.4
−0.2
0.0
0.2
0.4
position along the hull x/L (−0.5 = stern, 0 = midship, +0.5 = bow)
100 % load: C_Y = 0.84, l_p/L = 0.059
40 % load (ballast): C_Y = 0.52, l_p/L = 0.100
dotted: uniform drag with the same C_Y
dot: centre of the sideways drag (l_p aft)