


AirMon / Carrier fabrication drawing

Prototype r0.1 | 2026-09-06 | Dimensions in mm; do not scale drawing

HOLD: verify supplied PM socket and exact display-board harness before fabrication.

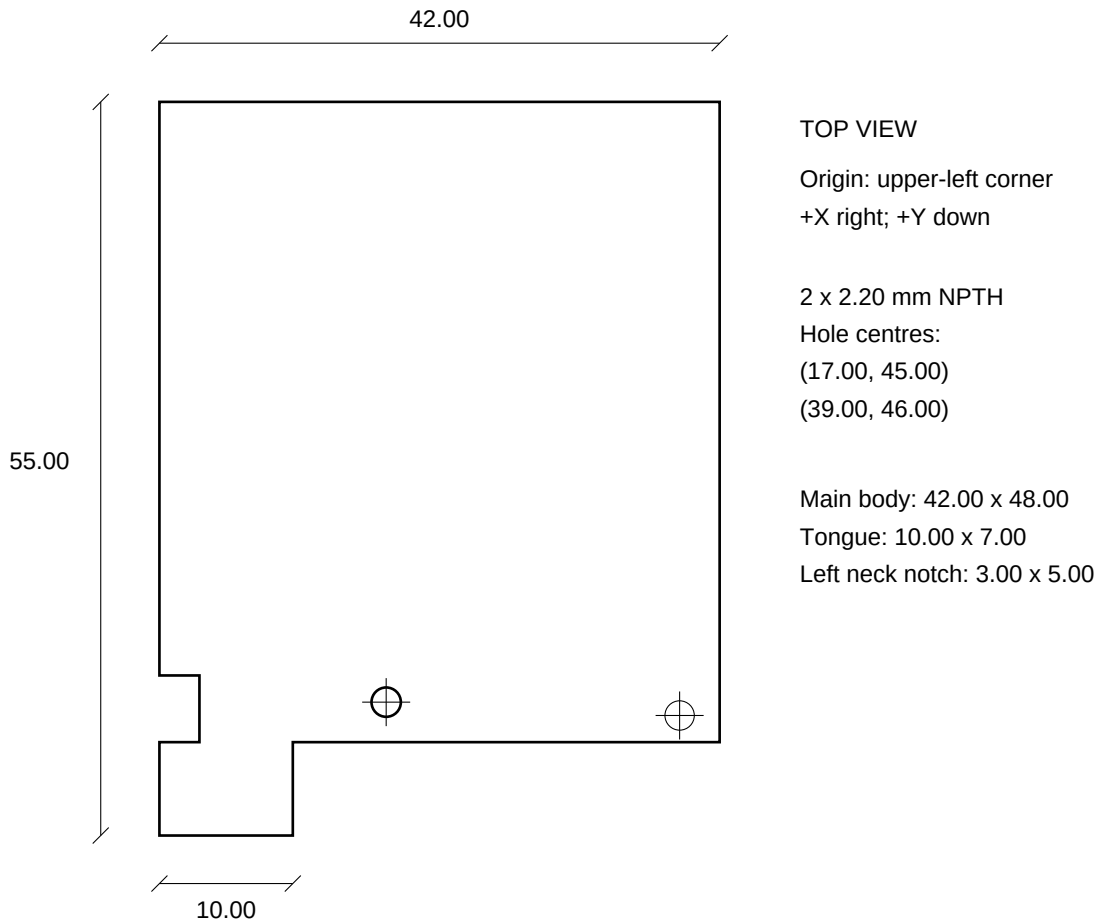

Fabrication and assembly notes

2 copper layers; FR-4; finished board thickness 1.60 mm; 1 oz copper.

Solder mask both sides; lead-free finish; no controlled impedance requirement.

Minimum designed track width 0.25 mm; clearance 0.20 mm.

Through vias: 0.30 mm drill / 0.60 mm copper diameter. No via-in-pad.

Follow Gerber outline and Excellon files for complete machining geometry.

Non-dimensioned tolerances: confirm manufacturer standard capability before order.

Assemble both sides using drawings, BOM, and placement CSV; check bottom rotation.

J1/J2 through-hole assembly is separate from SMT; J5 supplied socket is optional.

Keep SHT40 aperture free of flux contamination, wash, adhesive, and coating.

No production approval implied: electrical load, thermal behavior, and fit tests pending.

Source of truth: [hardware/airmon.kicad_pcb](#) and [hardware/exports/airmon-gerbers.zip](#)

See [docs/HARDWARE.md](#) for harness pinout and prototype release gates.