4004
SINGLE CHIP 4-BIT P-CHANNEL MICROPROCESSOR

- 4-Bit Parallel CPU With 46 Instructions
- Instruction Set Includes Conditional Branching, Jump to Subroutine and Indirect Fetching
- Binary and Decimal Arithmetic Modes
- 10.8 Microsecond Instruction Cycle
- CPU Directly Compatible With MCS-40 ROMs and RAMs
- Easy Expansion—One CPU can Directly Drive up to 32,768 Bits of ROM and up to 5120 Bits of RAM
- Standard Operating Temperature Range of 0° to 70°C
- Also Available With -40° to +85°C Operating Range

The Intel® 4004 is a complete 4-bit parallel central processing unit (CPU). The 4004 easily interfaces with keyboards, switches, displays, A-D converters, printers and other peripheral equipment.

The CPU can directly address 4K 8-bit instruction words of program memory and 5120 bits of data storage RAM. Sixteen index registers are provided for temporary data storage. Up to 16 4-bit input ports and 16 4-bit output ports may also be directly addressed.

The 4004 is fabricated with P-channel silicon gate MOS technology.

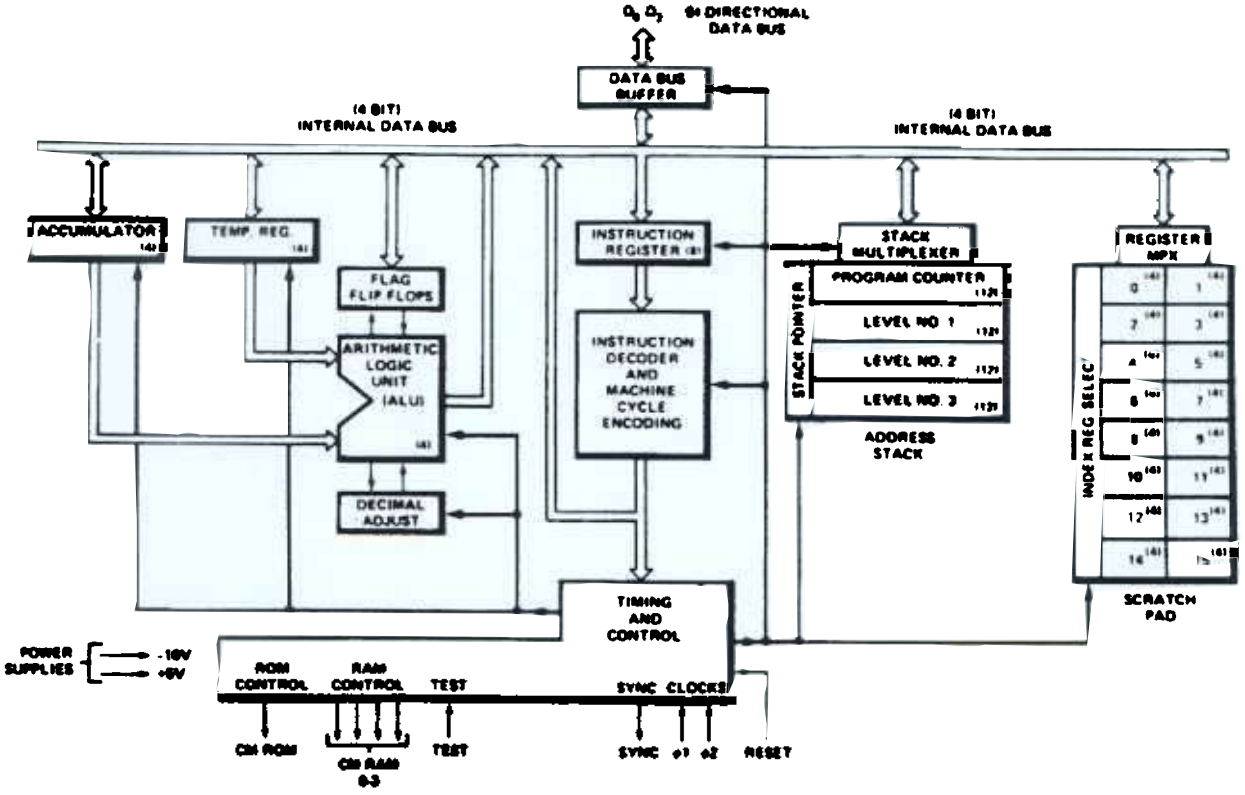

March 1987
Order Number: 231962

Pin Description

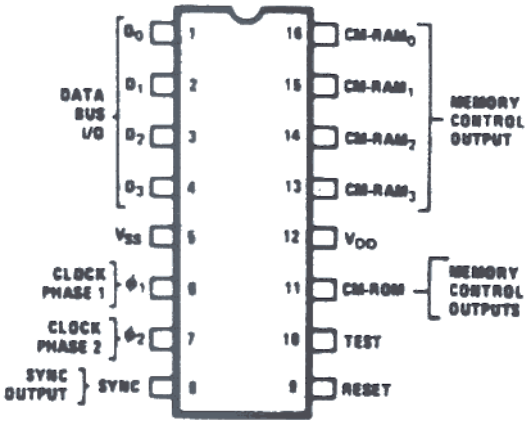

D_0-D_3

BIDIRECTIONAL DATA BUS. All address and data communication between the processor and the RAM and ROM chips occurs on these 4 lines.

RESET

RESET input. A logic "1" level at this input clears all flags and status registers and forces the program counter to zero. To completely clear all address and index registers, RESET must be applied for 64 clock cycles (8 machine cycles).

TEST

TEST input. The logical state of this signal may be tested with the JCN instruction.

SYNC

SYNC output. Synchronization signal generated by the processor and set to the ROM and RAM chips. It indicates the beginning of an instruction cycle.

CM-ROM

CM-ROM output. This is the ROM selection signal sent out by the processor when data is required from program memory.

CM-RAM$_0$ – CM-RAM$_3$

CM-RAM outputs. These are the bank selection signals for the 4002 RAM chips in the system.

ϕ_1, ϕ_2

Two phase clock inputs.

V_{SS}

Most positive voltage.

V_{DD}

V_{SS} -15 ±5% main supply voltage.

Instruction Set Format

A. Machine Instructions

- 1 word instruction – 8-bits requiring 8 clock periods (instruction cycle).
- 2 word instruction – 16-bits requiring 16 clock periods (2 instruction cycles).

Each instruction is divided into two four-bit fields. The upper 4-bits is the OPR field containing the operation code. The lower 4-bits is the OPA field containing the modifier. For two word instructions, the second word contains address information or data.

The upper 4-bits (OPR) will always be fetched before the lower 4-bits (OPA) during M_1 and M_2 times respectively.

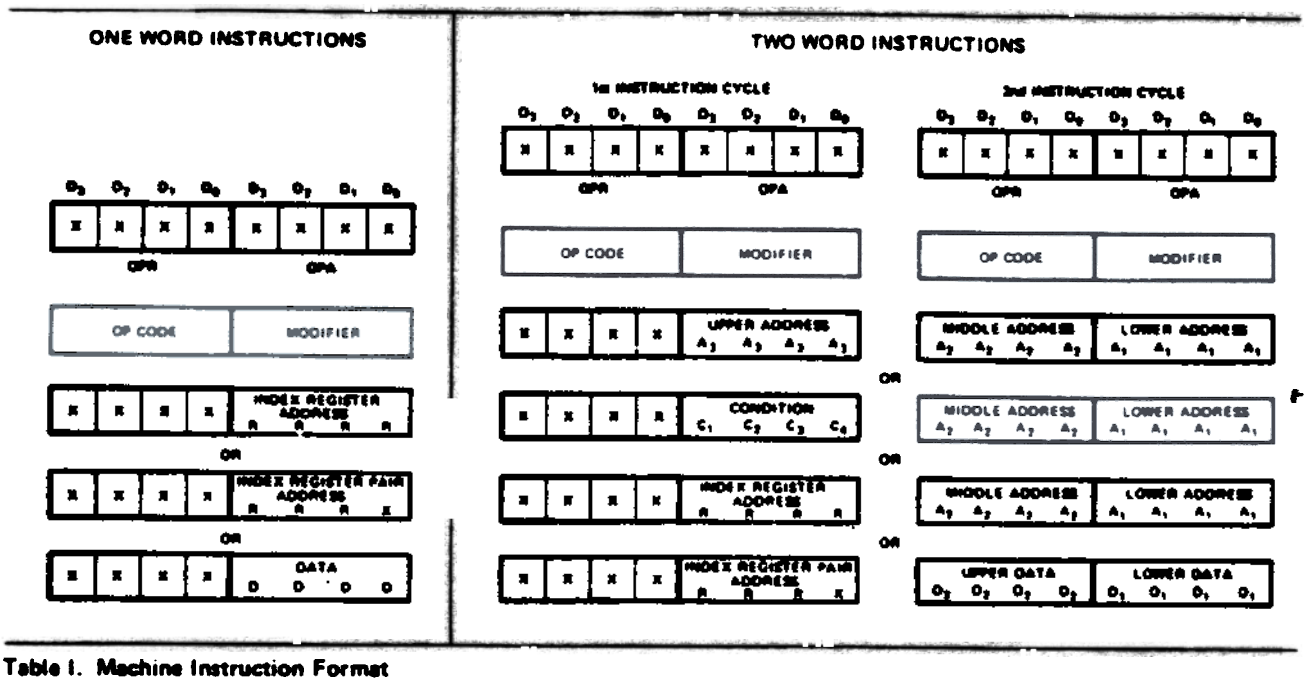

Table I. Machine Instruction Format

B. Input/Output and RAM Instructions and Accumulator Group Instructions

In these instructions (which are all single word) the OPR contains a 4-bit code which identifies either the I/O instruction or the accumulator group instruction and the OPA contains a 4-bit code which identifies the operation to be performed. Table II illustrates the contents of each 4-bit field.

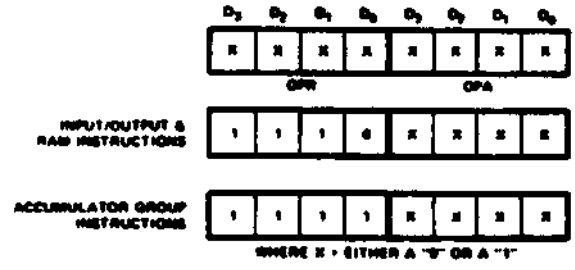

Table II. I/O and Accumulator Group Instruction Formats

4004 Instruction Set

BASIC INSTRUCTIONS (* = 2 Word Instructions)

Hex Code	MNEMONIC	OPR $D_3 D_2 D_1 D_0$	OPA $D_3 D_2 D_1 D_0$	DESCRIPTION OF OPERATION
00	NOP	0 0 0 0	0 0 0 0	No operation.
1 - - -	*JCN	0 0 0 1 $A_3 A_2 A_1 A_0$	$C_3 C_2 C_1 C_0$ $A_7 A_6 A_5 A_4$	Jump to ROM address $A_7 A_6 A_5 A_4 . A_3 A_2 A_1 A_0$ (within the same ROM that contains this JCN instruction) if condition $C_3 C_2 C_1 C_0$ is true, otherwise go to the next instruction in sequence
2 - - -	*FIM	0 0 1 0 $D_3 D_2 D_1 D_0$	R R R 0 $D_7 D_6 D_5 D_4$	Fetch immediate (direct) from ROM Data $D_7 D_6 D_5 D_4 D_3 D_2 D_1 D_0$ to index register pair location RRR
3 -	FIN	0 0 1 1	R R R 0	Fetch indirect from ROM. Send contents of index register pair location 0 out as an address. Data fetched is placed into register pair location RRR.
3 -	JIN	0 0 1 1	R R R 1	Jump indirect. Send contents of register pair RRR out as an address at A_1 and A_2 time in the instruction cycle.
4 - - -	*JUN	0 1 0 0 $A_3 A_2 A_1 A_0$	$A_3 A_2 A_1 A_0$ $A_7 A_6 A_5 A_4$	Jump unconditional to ROM address $A_7 A_6 A_5 A_4 A_3 A_2 A_1 A_0$.
5 - - -	*JMS	0 1 0 1 $A_3 A_2 A_1 A_0$	$A_3 A_2 A_1 A_0$ $A_7 A_6 A_5 A_4$	Jump to subroutine ROM address $A_7 A_6 A_5 A_4 A_3 A_2 A_1 A_0$. save old address (up 1 level in stack)
6 -	INC	0 1 1 0	R R R R	Increment contents of register RRRR
7 - - -	*ISZ	0 1 1 1 $A_3 A_2 A_1 A_0$	R R R R $A_7 A_6 A_5 A_4$	Increment contents of register RRRR. Go to ROM address $A_7 A_6 A_5 A_4$ $A_3 A_2 A_1 A_0$ (within the same ROM that contains this ISZ instruction) if result $\neq 0$, otherwise go to the next instruction in sequence
8 -	ADD	1 0 0 0	R R R R	Add contents of register RRRR to accumulator with carry
9 -	SUB	1 0 0 1	R R R R	Subtract contents of register RRRR to accumulator with borrow
A -	LD	1 0 1 0	R R R R	Load contents of register RRRR to accumulator
B -	XCH	1 0 1 1	R R R R	Exchange contents of index register RRRR and accumulator
C -	BBL	1 1 0 0	D D D D	Branch back (down 1 level in stack) and load data DDDD to accumulator
D -	LDM	1 1 0 1	D D D D	Load data DDDD to accumulator
F0	CLB	1 1 1 1	0 0 0 0	Clear both (Accumulator and carry)
F1	CLC	1 1 1 1	0 0 0 1	Clear carry.
F2	IAC	1 1 1 1	0 0 1 0	Increment accumulator.
F3	CMC	1 1 1 1	0 0 1 1	Complement carry.
F5	RAL	1 1 1 1	0 1 0 1	Rotate left (Accumulator and carry)
F6	RAR	1 1 1 1	0 1 1 0	Rotate right. (Accumulator and carry)
F7	TCC	1 1 1 1	0 1 1 1	Transmit carry to accumulator and clear carry.
F8	DAC	1 1 1 1	1 0 0 0	Decrement accumulator.
F9	TCS	1 1 1 1	1 0 0 1	Transfer carry subtract and clear carry.
FA	STC	1 1 1 1	1 0 1 0	Set carry
FB	DAA	1 1 1 1	1 0 1 1	Decimal adjust accumulator.
FC	KBP	1 1 1 1	1 1 0 0	Keyboard process. Converts the contents of the accumulator from a one out of four code to a binary code.
FD	DCL	1 1 1 1	1 1 0 1	Designate command line.

4001/4002/4008/4009/4289 INPUT/OUTPUT AND RAM INSTRUCTIONS

Hex Code	MNEMONIC	OPR $D_3 D_2 D_1 D_0$	OPA $D_3 D_2 D_1 D_0$	DESCRIPTION OF OPERATION
2 ·	SRC	0 0 1 0	R R R 1	Send register control. Send the address (contents of index register pair RRR) to ROM and RAM at X_2 and X_3 time in the instruction cycle
E0	WRM	1 1 1 0	0 0 0 0	Write the contents of the accumulator into the previously selected RAM main memory character
E1	WMP	1 1 1 0	0 0 0 1	Write the contents of the accumulator into the previously selected RAM output port (Output Lines)
E2	WRR	1 1 1 0	0 0 1 0	Write the contents of the accumulator into the previously selected ROM output port. (I/O Lines)
E3	WPM	1 1 1 0	0 0 1 1	Write the contents of the accumulator into the previously selected half byte of read/write program memory (used with 4008/4009 or 4289 only)
E4	WR0	1 1 1 0	0 1 0 0	Write the contents of the accumulator into the previously selected RAM status character 0.
E5	WR1	1 1 1 0	0 1 0 1	Write the contents of the accumulator into the previously selected RAM status character 1
E6	WR2	1 1 1 0	0 1 1 0	Write the contents of the accumulator into the previously selected RAM status character 2.
E7	WR3	1 1 1 0	0 1 1 1	Write the contents of the accumulator into the previously selected RAM status character 3
E8	SBM	1 1 1 0	1 0 0 0	Subtract the previously selected RAM main memory character from accumulator with borrow
E9	RDM	1 1 1 0	1 0 0 1	Read the previously selected RAM main memory character into the accumulator
EA	RDR	1 1 1 0	1 0 1 0	Read the contents of the previously selected ROM input port into the accumulator (I/O Lines)
EB	ADM	1 1 1 0	1 0 1 1	Add the previously selected RAM main memory character to accumulator with carry
EC	RD0	1 1 1 0	1 1 0 0	Read the previously selected RAM status character 0 into accumulator
ED	RD1	1 1 1 0	1 1 0 1	Read the previously selected RAM status character 1 into accumulator
EE	RD2	1 1 1 0	1 1 1 0	Read the previously selected RAM status character 2 into accumulator
EF	RD3	1 1 1 0	1 1 1 1	Read the previously selected RAM status character 3 into accumulator

Hex	Mnemonic		Hex	Mnemonic			Hex	Mnemonic		Hex	Mnemonic	
00	–		40	JUN		⎫	80	ADD	0	C0	BBL	0
01	–		41	JUN		⎪	81	ADD	1	C1	BBL	1
02	–		42	JUN		⎪	82	ADD	2	C2	BBL	2
03	–		43	JUN		⎪	83	ADD	3	C3	BBL	3
04	–		44	JUN		⎪	84	ADD	4	C4	BBL	4
05	–		45	JUN		⎪	85	ADD	5	C5	BBL	5
06	–		46	JUN		⎪	86	ADD	6	C6	BBL	6
07	–		47	JUN		⎪	87	ADD	7	C7	BBL	7
08	–		48	JUN		⎪	88	ADD	8	C8	BBL	8
09	–		49	JUN		⎪	89	ADD	9	C9	BBL	9
0A	–		4A	JUN		⎪	8A	ADD	10	CA	BBL	10
0B	–		4B	JUN		⎪	8B	ADD	11	CB	BBL	11
0C	–		4C	JUN		⎪	8C	ADD	12	CC	BBL	12
0D	–		4D	JUN		⎪	8D	ADD	13	CD	BBL	13
0E	–		4E	JUN		⎪ Second hex	8E	ADD	14	CE	BBL	14
0F	–		4F	JUN		⎪ digit is part	8F	ADD	15	CF	BBL	15
10	JCN	CN=0	50	JMS		⎪ of jump	90	SUB	0	D0	LDM	0
11	JCN	CN=1 also JNT	51	JMS		⎪ address.	91	SUB	1	D1	LDM	
12	JCN	CN=2 also JC	52	JMS		⎪	92	SUB	2	D2	LDM	2
13	JCN	CN=3	53	JMS		⎪	93	SUB	3	D3	LDM	3
14	JCN	CN=4 also JZ	54	JMS		⎪	94	SUB	4	D4	LDM	4
15	JCN	CN=5	55	JMS		⎪	95	SUB	5	D5	LDM	5
16	JCN	CN=6	56	JMS		⎪	96	SUB	6	D6	LDM	6
17	JCN	CN=7	57	JMS		⎪	97	SUB	7	D7	LDM	7
18	JCN	CN=8	58	JMS		⎪	98	SUB	8	D8	LDM	8
19	JCN	CN=9 also JT	59	JMS		⎪	99	SUB	9	D9	LDM	9
1A	JCN	CN=10 also JNC	5A	JMS		⎪	9A	SUB	10	DA	LDM	10
1B	JCN	CN=11	5B	JMS		⎪	9B	SUB	11	DB	LDM	11
1C	JCN	CN=12 also JNZ	5C	JMS		⎪	9C	SUB	12	DC	LDM	12
1D	JCN	CN=13	5D	JMS		⎪	9D	SUB	13	DD	LDM	13
1E	JCN	CN=14	5E	JMS		⎪	9E	SUB	14	DE	LDM	14
1F	JCN	CN=15	5F	JMS		⎭	9F	SUB	15	DF	LDM	15
20	FIM	0	60	INC	0		A0	LD	0	E0	WRM	
21	SRC	0	61	INC	1		A1	LD	1	E1	WMP	
22	FIM	2	62	INC	2		A2	LD	2	E2	WRR	
23	SRC	2	63	INC	3		A3	LD	3	E3	WPM	
24	FIM	4	64	INC	4		A4	LD	4	E4	WR0	
25	SRC	4	65	INC	5		A5	LD	5	E5	WR1	
26	FIM	6	66	INC	6		A6	LD	6	E6	WR2	
27	SRC	6	67	INC	7		A7	LD	7	E7	WR3	
28	FIM	8	68	INC	8		A8	LD	8	E8	SBM	
29	SRC	8	69	INC	9		A9	LD	9	E9	RDM	
2A	FIM	10	6A	INC	10		AA	LD	10	EA	RDR	
2B	SRC	10	6B	INC	11		AB	LD	11	EB	ADM	
2C	FIM	12	6C	INC	12		AC	LD	12	EC	RD0	
2D	SRC	12	6D	INC	13		AD	LD	13	ED	RD1	
2E	FIM	14	6E	INC	14		AE	LD	14	EE	RD2	
2F	SRC	14	6F	INC	15		AF	LD	15	EF	RD3	
30	FIN	0	70	ISZ	0		B0	XCH	0	F0	CLB	
31	JIN	0	71	ISZ	1		B1	XCH	1	F1	CLC	
32	FIN	2	72	ISZ	2		B2	XCH	2	F2	IAC	
33	JIN	2	73	ISZ	3		B3	XCH	3	F3	CMC	
34	FIN	4	74	ISZ	4		B4	XCH	4	F4	CMA	
35	JIN	4	75	ISZ	5		B5	XCH	5	F5	RAL	
36	FIN	6	76	ISZ	6		B6	XCH	6	F6	RAR	
37	JIN	6	77	ISZ	7		B7	XCH	7	F7	TCC	
38	FIN	8	78	ISZ	8		B8	XCH	8	F8	DAC	
39	JIN	8	79	ISZ	9		B9	XCH	9	F9	TCS	
3A	FIN	10	7A	ISZ	10		BA	XCH	10	FA	STC	
3B	JIN	10	7B	ISZ	11		BB	XCH	11	FB	DAA	
3C	FIN	12	7C	ISZ	12		BC	XCH	12	FC	KBP	
3D	JIN	12	7D	ISZ	13		BD	XCH	13	FD	DCL	
3E	FIN	14	7E	ISZ	14		BE	XCH	14	FE	–	
3F	JIN	14	7F	ISZ	15		BF	XCH	15	FF	–	

Absolute Maximum Ratings*

Ambient Temperature Under Bias	.... 0°C to 70°C
Storage Temperature	-55°C to + 125°C
Input Voltages and Supply Voltage with respect to Vss	+0.5V to -20V
Power Dissipation	.... 1.0 Watt

*COMMENT:
Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

D.C. and Operating Characteristics

T_A = 0°C to 70°C; V_{SS} -V_{DD} = 15V ± 5%; $t_{\phi PW}$ = $t_{\phi D1}$ = 400 nsec; logic "0" is defined as the more positive voltage (V_{IH}, V_{OH}); logic "1" is defined as the more negative voltage (V_{IL}, V_{OL}); Unless Otherwise Specified.

SUPPLY CURRENT

Symbol	Parameter	Limit Min.	Limit Typ.	Limit Max.	Unit	Test Conditions
I_{DD}	Average Supply Current		30	40	mA	T_A=25°C
INPUT CHARACTERISTICS						
I_{LI}	Input Leakage Current			10	µA	V_{IL}=V_{DD}
V_{IH}	Input High Voltage (Except Clocks)	V_{SS}-1.5		V_{SS}+.3	V	
V_{IL}	Input Low Voltage (Except Clocks)	V_{DD}		V_{SS}-5.5	V	
V_{ILO}	Input Low Voltage	V_{DD}		V_{SS}-4.2	V	4004 TEST Input
V_{IHC}	Input High Voltage Clocks	V_{SS}-1.5		V_{SS}+.3	V	
V_{ILC}	Input Low Voltage Clocks	V_{DD}		V_{SS}-13.4	V	
OUTPUT CHARACTERISTICS						
I_{LO}	Data Bus Output Leakage Current			10	µA	V_{OUT}=-12V
V_{OH}	Output High Voltage	V_{SS}-.5V	V_{SS}		V	Capacitance Load
I_{OL}	Data Lines Sinking Current	8	15		mA	V_{OUT}=V_{SS}
I_{OL}	CM-ROM Sinking Current	6.5	12		mA	V_{OUT}=V_{SS}
I_{OL}	CM-RAM Sinking Current	2.5	6		mA	V_{OUT}=V_{SS}
V_{OL}	Output Low Voltage, Data Bus, CM, SYNC	V_{SS}-12		V_{SS}-6.5	V	I_{OL}=0.5mA
R_{OH}	Output Resistance, Data Line "0" Level		150	250	Ω	V_{OUT}=V_{SS}-.5V
R_{OH}	CM-ROM Output Resistance, Data Line "0" Level		320	600	Ω	V_{OUT}=V_{SS}-.5V
R_{OH}	CM-RAM Output Resistance, Data Line "0" Level		1.1	1.8	kΩ	V_{OUT}=V_{SS}-.5V
CAPACITANCE						
C_ϕ	Clock Capacitance		14	20	pF	V_{IN}=V_{SS}
C_{DB}	Data Bus Capacitance		7	10	pF	V_{IN}=V_{SS}
C_{IN}	Input Capacitance			10	pF	V_{IN}=V_{SS}
C_{OUT}	Output Capacitance			10	pF	V_{IN}=V_{SS}

Typical D.C. Characteristics

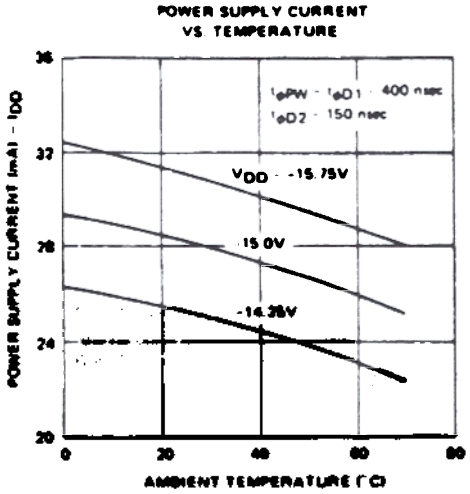

A.C. Characteristics

T_A=0°C to 70°C, V_{SS}-V_{DD} = 15V ±5%

Symbol	Parameter	Limit Min.	Limit Typ.	Limit Max.	Unit	Test Conditions
t_{CY}	Clock Period	1.35		2.0	μsec	
$t_{\phi R}$	Clock Rise Time			50	ns	
$t_{\phi F}$	Clock Fall Times			50	ns	
	Clock Width	380		480	ns	
	Clock Delay ϕ_1 to ϕ_2	400		550	ns	
	Clock Delay ϕ_2 to ϕ_1	150			ns	
	Data-In, CM, SYNC Write Time	350	100		ns	
	Data-In, CM, SYNC Hold Time	40	20		ns	
	Data Bus Hold Time During M_2-X_1 and and X_2-X_3 Transition.	150			ns	
t_{OS}[2]	Set Time (Reference)	0			ns	
	Data-Out Access Time					C_{OUT} =
	Data Lines			930	ns	500pF Data Lines
	Data Lines			700	ns	200pF Data Lines[4]
	SYNC			930	ns	500pF SYNC
	CM-ROM			930	ns	180pF CM-ROM
	CM-RAM			930	ns	50pF CM-RAM
t_{OH}	Data-Out Hold Time	50	150		ns	C_{OUT}=20pF

Notes: 1. t_H measured with $t_{\phi R}$ = 10nsec.
2. T_{ACC} is Data Bus, SYNC and CM-line output access time referred to the ϕ_2 trailing edge which clocks these lines out. t_{OS} is the same output access time referred to the leading edge of the next ϕ_2 clock pulse.
3. All MCS-40 components which may transmit instruction or data to the 4004 at M_2 and X_2 always enter a float state until the 4004 takes over the data bus at X_1 and X_3 time. Therefore the t_H requirement is always insured since each component contributes 10μA of leakage current and 10pF of capacitance which guarantees that the data bus cannot change faster than 1V/μs.
4. $C_{DATA\ BUS}$ = 200pF if 4008 and 4009 or 4289 is used.

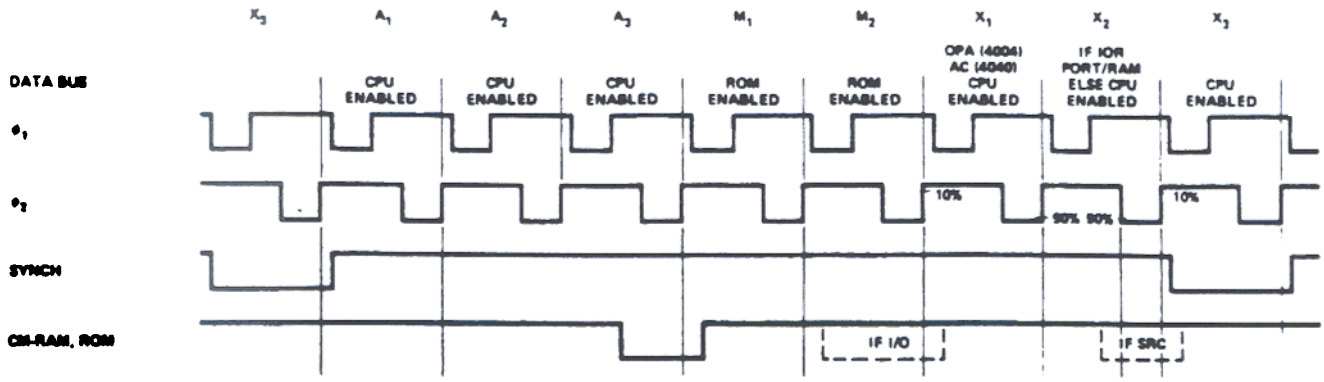

Figure 1. Timing Diagram.

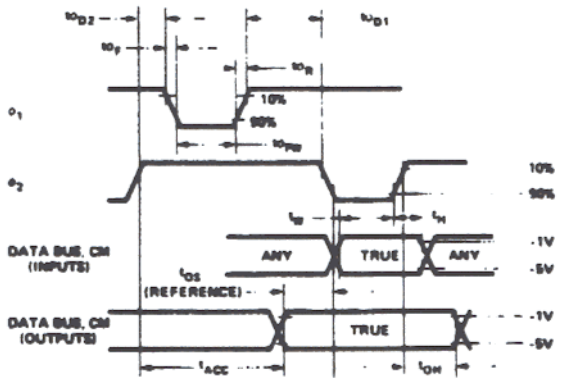

Figure 2. Timing Detail.