

HVL 512V 25AH-B25PL-M3-10W


HIGH VOLTAGE LITHIUM SOLUTION

Our HV range of Lithium backup Solutions are designed for High Voltage UPS & Energy storage Applications and are compatible with all kinds of two Wire (Non-centre tap) and three wire (Centre tap) systems.



Pictorial representation for reference purpose only

ENERTECT VISION TECHNOLOGIES PVT. LTD.

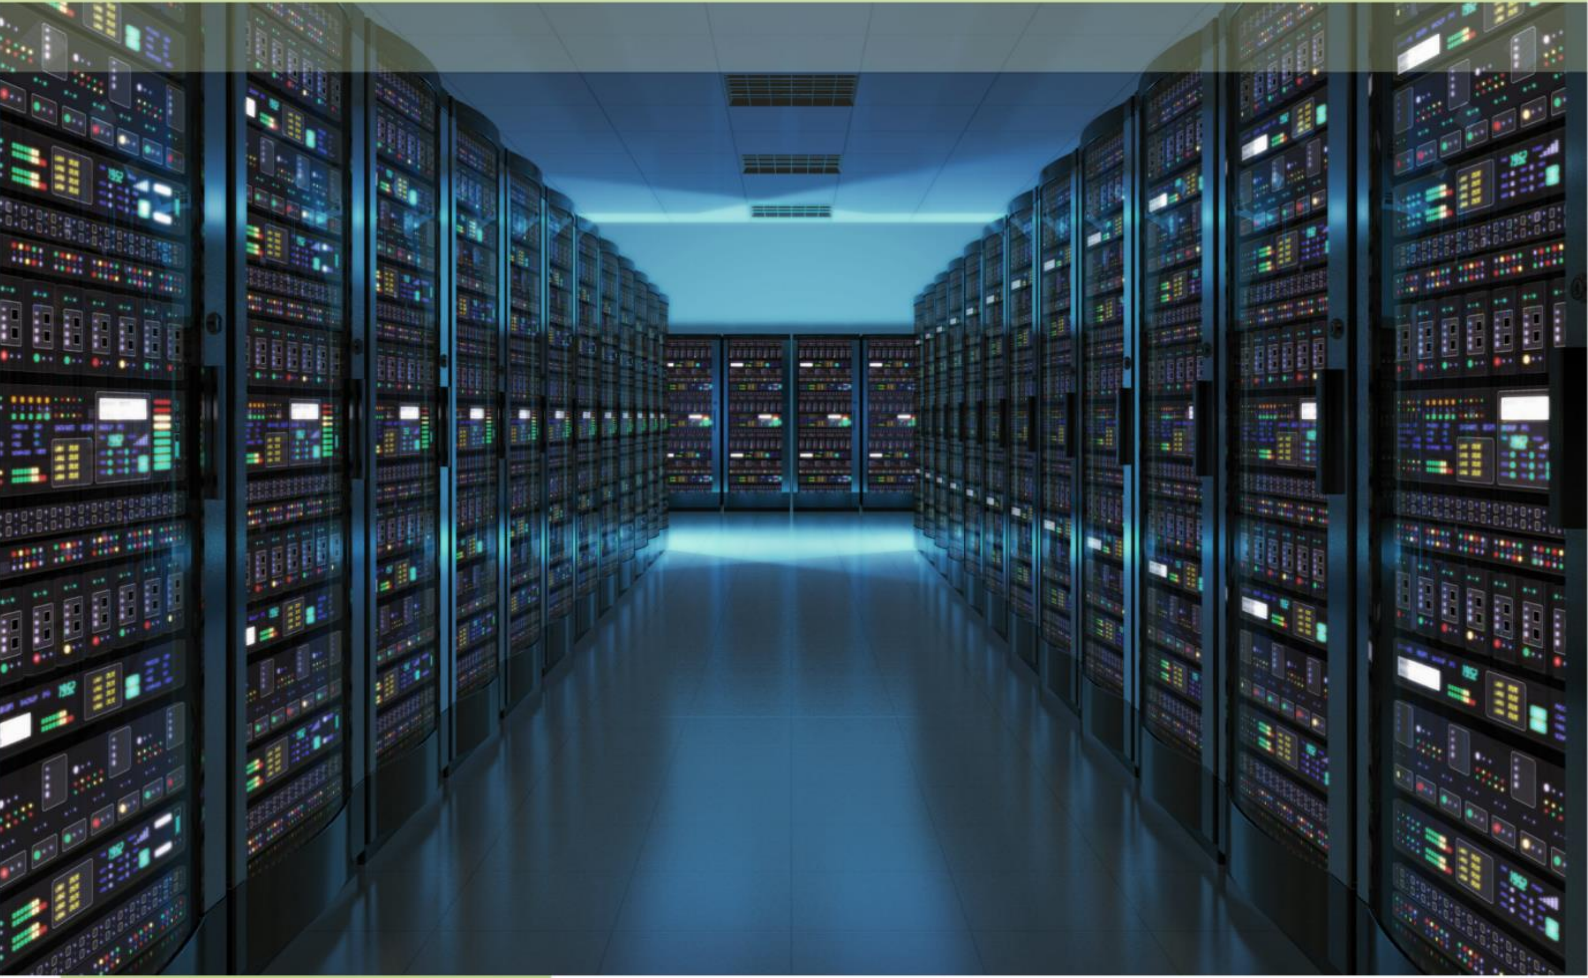

Global Power Source Group of Companies have dominated the Power Backup Industry since 1988. With 30 plus years of experience and a strong network that spans over 30 countries, we continuously strive to provide high-quality industrial products, solutions, and service around the globe with an assurance of unmatched quality.

We aim to be renowned pioneers while continuously evolving to provide exceptional, innovative and effective solutions. With our new division dedicated for Lithium batteries namely

“ENERTECT VISION TECHNOLOGIES PVT. LTD. (EVTPL)” we look forward to cater the backup industry with the latest technology and high quality of performance as per tailor made customer's requirement.

EVTPL's Lithium battery solutions for UPS& Solar energy storage applications have been developed in house and tested vigorously for these applications. The BMS used in this system is developed locally and in-house in cooperation with Ellithion technology from USA as per the specific design requirement for these application. This BMS monitors, controls and enhances the performance of the battery solution effectively as these packs are used for critical and important applications. EVTPL follows the make-in-India initiative completely and each pack is manufactured in local facility near Mumbai, India with the highest level of quality regulations.

LITHIUM BATTERY PACK UPS APPLICATIONS

HVL 512V 25AH

Strict choice for cells:

We ensure the good consistency of the product by choosing the highest grade and quality of cells. The cells are selected based on the capacity, internal resistance and the lowest delta voltage difference.

Full-featured BMS:

We use the advance featured BMS system which focuses on utmost operational and Environmental safety. The BMS not only monitors temperature, voltage and capacity but also can regulate and protect the modules and battery pack with its advance technology.

Rack arrangement:

The battery packs are designed in modular rack system which focuses on optimum foot print in terms of space and weight.

Stable system performance:

The battery pack are time tested to provide stable performance with benefit to the user in terms of return on investment (ROI),
utilization, lower carbon foot print.




LITHIUM BATTERY FEATURES

NO.	FEATURES	REMARKS
1.	Flexibility	Solutions are customized to match the exact requirement of the application & compatibility with the UPS systems.
2.	Form Factor	Our solution ensures the smallest footprint built in customized racks.
3.	Float service life @25°C	12 to 15 years
4.	No. of Cycles	5000 cycles at 80% DOD. (As per cell chemistry and Charge / Discharge Ratings)
5.	Rate of Discharge	High Rate Discharge / Longer Backup solutions
6.	General Usage Temperature	25°C +/- 2 (recommended for Optimal Performance)
7.	Usage	Float / Cyclic depending on Application requirement
8.	Weight	Smaller foot print as compared to other technologies

BATTERY PACK SPECIFICATIONS

NO.	PARAMETER	STANDARD VALUE
1.	Nominal Voltage	512V
2.	Typical Capacity (Capacity can vary by +/- 2%)	25Ah
3.	Maximum Allowable Discharge Current of Battery Pack	75A (Max. 3C)
4.	Discharge cut-off voltage	448V
5.	Charge Voltage (Charge Mode: CC/CV, use special Lithium Charger)	576V
6.	Charge Current	2.5A to 12.5A or 0.1C to 0.5C
7.	Allowable Discharge current as per BMS rating	50A
8.	Total Available Energy of System	12.8kwh
9.	No. of Modules	(10 Module+1BPU) per System*1
10.	Modules Capacity	51.2V 25Ah
11.	Battery configuration (2 Wire or 3 Wire)	3 Wire
12.	Cell Chemistry	LFP
13.	Cell Type	Prismatic
14.	Recommended Operating Temperature	25°C +/- 2°C
15.	Total Weight (Approx.)	370kg per Rack * 1
16.	Size (W*D*H) (+/-1%) (Can be tailor made)	(600mm * 800mm * 1704mm) per Rack *1
17.	Temperature	- Working temperature : - Charging Temperature: 0~45°C - Discharging Temperature: -20~60°C - Storage Temperature: 0~35°C for 6 months
18.	Communication Interface	RS485/TCP-IP
19.	Protection Functions	- Pack over voltage protection - Pack under voltage protection - Charge over current protection - Over & Under Temperature Protection - Balance Function - Cell over voltage protection - Discharge over current protection - Cell under voltage protection

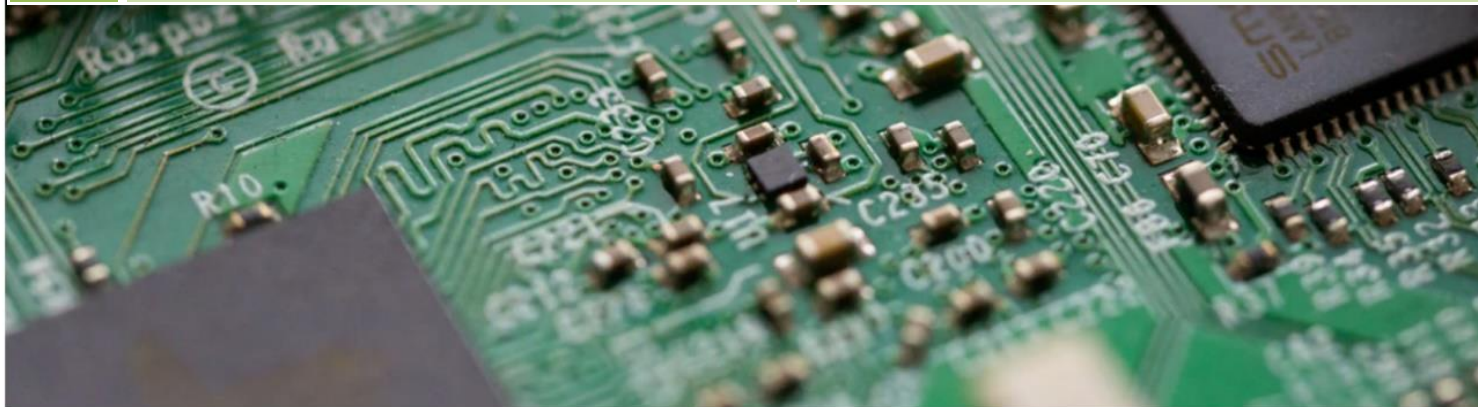

ELECTRICAL CHARACTERISTICS OF BATTERY MANAGEMENT SYSTEM

- BMS monitors the total voltage of battery as well as of individual cells which helps users to determine the health and performance of the batteries.
- Measures the amount of current which flows through each battery as this enables the user to optimize the current flow in the system.
- Temperature at pack level is measured to help users prevent thermal runaway and overheating.
- It measures and indicates the battery capacity in percentage, which helps the user to accurately determine the power of battery pack.

TECHNICAL SPECIFICATIONS

PARAMETER	FUNCTION	REMARKS
Voltage	Charge Mode	CC/CV
	Single cell charged balance Voltage	Available
Current	Continuous charge /discharge current	Available
Over voltage protection	Overcharge protection voltage	Available
	Overcharge release voltage	Available
	Under discharge Voltage protection	Available
Under voltage protection	Under discharge release voltage	Available
	Overcharge current protection function	Available
Over current protection	Over discharge current protection function	Available
	Over discharge current release function	Cut off Load, release automatically
Short circuit protection	Condition	Exterior Short Circuit
	Release Condition	Cut off Load, release automatically
Temperature	Overcharge/ Discharge Temperature protection	Available
Remote alert notification (Optional & Ons)	Via Internet or Sim cards	Subscription & Device charges apply extra as applicable



HVL BATTERY PACK SERIES

EVTP's High voltage Lithium battery Series is offered for UPS & Energy Storage Applications.

WHY EVTP?

EVTP's High voltage Lithium battery Series adopts the leading Lithium technology to ensure the batteries are designed for longer float life, optimum performance, operational safety and environmental safety. The battery pack are designed for each customized application specifically.

WARRANTY

Ten Years

SERVICES AVAILABLE

Technical Support
Installation
Commissioning
Maintenance
Application Support
Hardware Support

OTHER AVAILABLE PRODUCTS

Energy Storage Solutions
Hybrid Solar Solutions
Electric Vehicle Solutions

APPLICATION:

UPS / ESS

VISIT US AT:



For warranty details, refer to T&C of warranty usage and handling.