

EFL 36V 30AH-D15CB-R


LOW VOLTAGE LITHIUM SOLUTION

Our LV range of Lithium backup solutions are designed for Low Voltage UPS & Energy storage applications.



Pictorial representation for reference purpose only

ENERTECT VISION TECHNOLOGIES PVT. LTD.

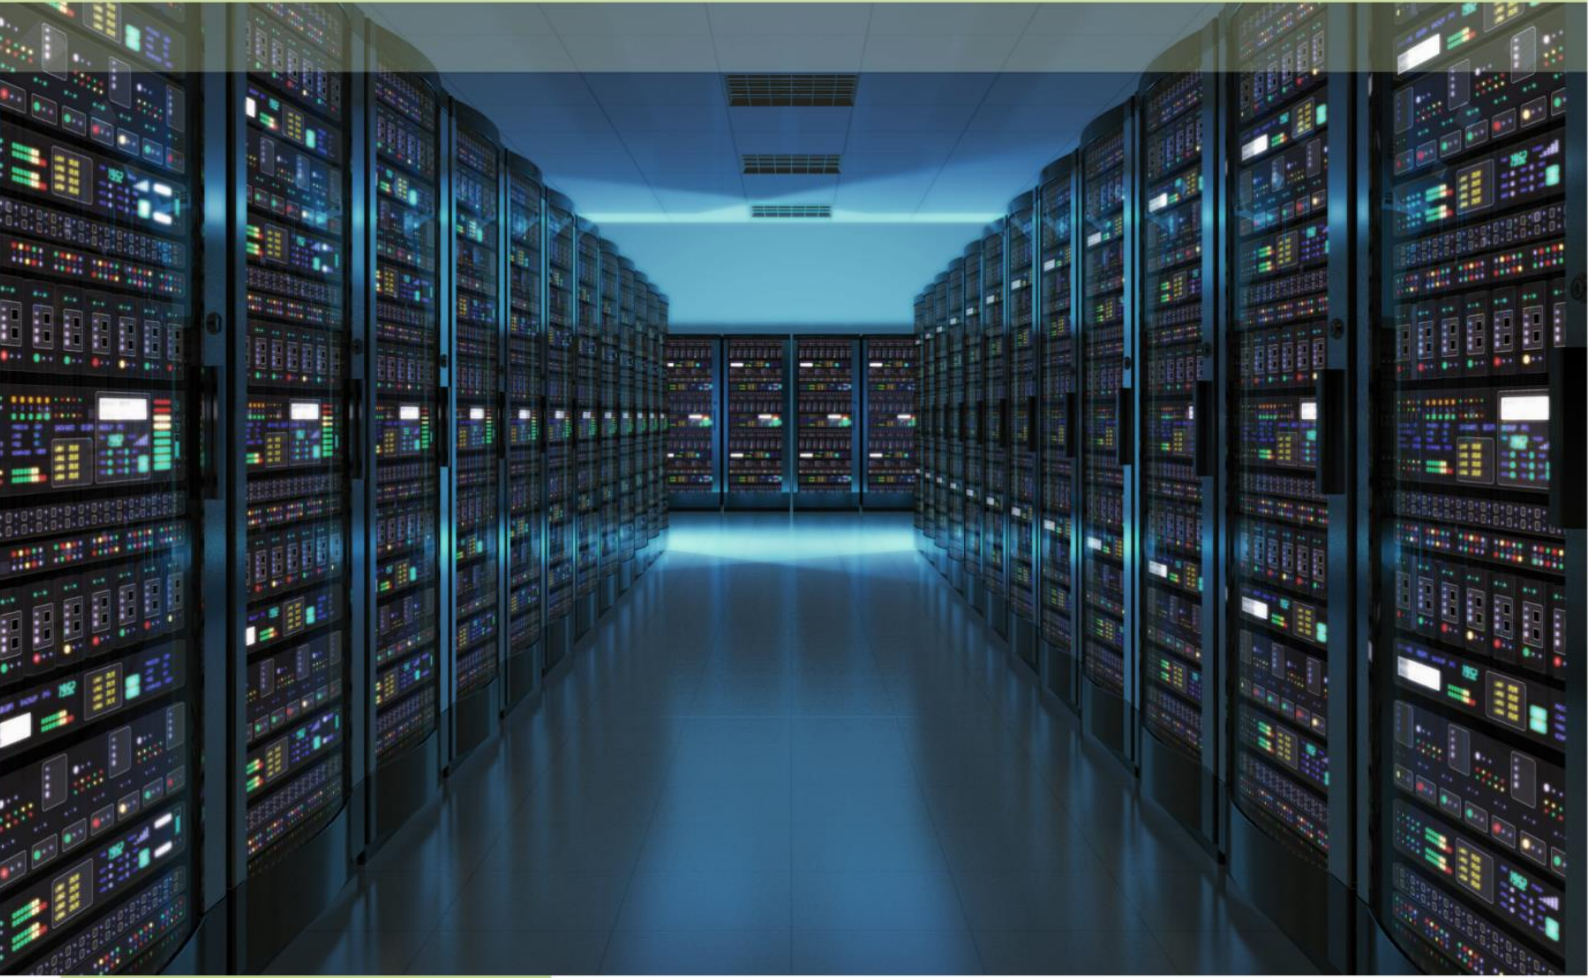

Global Power Source Group of Companies have dominated the Power Backup Industry since 1988. With 30 plus years of experience and a strong network that spans over 30 countries, we continuously strive to provide high-quality industrial products, solutions, and service around the globe with an assurance of unmatched quality.

We aim to be renowned pioneers while continuously evolving to provide exceptional, innovative and effective solutions. With our new division dedicated for Lithium batteries namely

“ENERTECT VISION TECHNOLOGIES PVT. LTD. (EVTPL)” we look forward to cater the backup industry with the latest technology and high quality of performance as per tailor made customer's requirement.

EVTPL's Lithium battery solutions for UPS& Solar energy storage applications have been developed in house and tested vigorously for these applications. The BMS used in this system is developed locally and in-house in cooperation with Ellithion technology from USA as per the specific design requirement for these application. This BMS monitors, controls and enhances the performance of the battery solution effectively as these packs are used for critical and important applications. EVTPL follows the make-in-India initiative completely and each pack is manufactured in local facility near Mumbai, India with the highest level of quality regulations.

LITHIUM BATTERY PACK UPS APPLICATIONS

EFL 36V 30AH

Strict choice for Individual cells:

We ensure the good consistency of the product by choosing the highest grade and quality of cells. The cells are selected based on the capacity, internal resistance and the lowest delta voltage difference.

Full-featured BMS:

We use the advance featured BMS system which focuses on utmost operational and Environmental safety. The BMS not only monitors temperature, voltage and capacity but also can regulate and protect the modules and battery pack with its advance technology.

Efficient TMS:

It can keep track on temperature of the battery pack at different locations.

Stable system performance:

The battery pack are time tested to provide stable performance with benefit to the user in terms of return on investment (ROI), space utilization, lower carbon foot print.



BATTERY PACK SPECIFICATIONS

NO.	PARAMETERS	STANDARD VALUE	REMARK
1.	Nominal Voltage	35.2V	-
2.	Typical Capacity	30Ah	Capacity can vary by +/- 2%
3.	Maximum Allowable Discharge Current of Battery Pack	60A	Max. 2C
4.	Discharge cut-off voltage	30.8V	-
5.	Charge Voltage	39.6V	Charge Mode: CC/CV use a constant current, constant voltage (CC/CV) please use special Lithium charger.
6.	Charge Current	3A to 15A or 0.1C to 0.5C	
7.	Cell Chemistry	LFP	
8.	Cell Type	Cylindrical	
9.	Total Weight (Approx.)	25Kg +/- 1Kg	
10.	Size (W*D*H) (+/-2%)	483mm x 270mm x 176mm	
11.	Communication	UART	
12.	Cycle Life @25°C	3000 cycles @ 80% DOD	
13.	Allowable Discharge Current as per BMS rating	30A	
14.	Recommended Operating Temp	25°C for Optimum Performance	
15.	Working temperature range	Charging 0°C ~ +45°C Discharging -20°C ~ +60°C	The Capacity may vary with different temperature levels
16.	Storing temperature range	0°C ~ +35°C for 6 Months	

ELECTRICAL CHARACTERISTICS OF BATTERY MANAGEMENT SYSTEM

- BMS monitors the total voltage of battery as well as of individual cells which helps users to determine the health and performance of the batteries.
- Measures the amount of current which flows through each battery as this enables the user to optimize the current flow in the system.
- Temperature at pack level is measured to help users prevent thermal runaway and overheating.
- It measures and indicates the battery capacity in percentage, which helps the user to accurately determine the power of battery pack.

TECHNICAL SPECIFICATIONS

PARAMETER	FUNCTION	REMARKS
Voltage	Charge Mode	CC/CV
	Single cell charged balance Voltage	Available
Current	Continuous charge /discharge current	Available
Over voltage protection	Overcharge protection voltage	Available
	Overcharge release voltage	Available
Under voltage protection	Under discharge Voltage protection	Available
	Under discharge release voltage	Available
Over current protection	Overcharge current protection function	Available
	Over discharge current protection function	Available
	Over discharge current release function	Cut off Load, release automatically
Short circuit protection	Condition	Exterior Short Circuit
	Release Condition	Cut off Load, release automatically
Temperature	Overcharge/ Discharge Temperature protection	Available
Remote alert notification (Optional & Ons)	Via Internet or Sim cards	Subscription & Device charges apply extra as applicable



HVL BATTERY PACK SERIES

EVTP's High voltage Lithium battery Series is offered for UPS & Energy Storage Applications.

WHY EVTP?

EVTP's High voltage Lithium battery Series adopts the leading Lithium technology to ensure the batteries are designed for longer float life, optimum performance, operational safety and environmental safety. The battery pack are designed for each customized application specifically.

STANDARD WARRANTY

Five Years

SERVICES AVAILABLE

Technical Support
Installation
Commissioning
Maintenance
Application Support
Hardware Support

OTHER AVAILABLE PRODUCTS

Energy Storage Solutions
Hybrid Solar Solutions
Electric Vehicle Solutions

APPLICATION:

UPS / ESS

VISIT US AT:



For warranty details, refer to T&C of warranty usage and handling.