



LG308 LoRaWAN Gateway User Manual

Document Version: 1.1.3

Firmware Version: LG02_LG08--build-v5.3.1574523484-20191123-2339

Version	Description	Date
1.0	Release	2018-Nov-17
1.1	Add notice for recover mode. Add hardware source code Add FAQ for customized frequency.	2019-Jan-10
1.1.1	Add how to control LED. Add	
1.1.2	Remove SX1276 description and GPS.	
1.1.3	Change the HTTP Port and SSH port for firmware version > v5.3	2019-Nov-26

1. Introduction.....	4
1.1 What is LG08 & LG308.....	4
1.2 Specifications.....	4
1.3 Features.....	6
1.4 Hardware System Structure.....	6
1.5 LG308 Applications.....	7
2. Access LG308	8
2.1 Access and configure LG308	8
3. Typical Network Setup	9
3.1 Overview	9
3.2 Use WAN port to access Internet.....	9
3.3 Access Internet as a WiFi Client.....	10
3.4 Use built-in 4G modem for internet access	12
3.5 Check Internet connection.....	14
4. Example : Configure as a LoRaWAN gateway.....	15
4.1 Create a gateway in TTN Server	15
4.2 Configure LG308 to connect to TTN.....	17
4.3 Configure frequency	18
4.4 Add a LoRaWAN End Device	19
5. Linux System	21
5.1 SSH Access for Linux console	21
5.2 Edit and Transfer files	22
5.3 File System.....	22
5.4 Package maintain system	23
6. Upgrade Linux Firmware	24
6.1 Upgrade via Web UI	24
6.2 Upgrade via Linux console.....	24
7. FAQ.....	25

7.1	How can I configure for customized frequency band?.....	25
7.2	Can I make my own firmware for LG308? Where can I find the source code of LG308?	29
7.3	Can I use the 868Mhz version for 915Mhz bands?.....	29
7.4	Can I control the LEDs?.....	29
7.5	More FAQs about general LoRa questions	29
8.	Trouble Shooting.....	30
8.1	I get kernel error when install new package, how to fix?	30
8.2	How to recover the LG308 if firmware crash.....	31
8.3	I configured LG308 for WiFi access and lost its IP. What to do now?	32
9.	Order Info	33
10.	Packing Info	33
11.	Support.....	33
12.	Reference.....	35

1. Introduction

1.1 What is LG08 & LG308


The LG308 is an open source **LoRaWAN Pico Gateway**. It lets you bridge LoRa wireless network to an IP network via WiFi, Ethernet, 3G or 4G cellular network. The LoRa wireless allows users to send data and reach extremely long ranges at low data-rates.

The LG308 uses **Semtech packet forwarder** and fully compatible with LoRaWAN protocol. It includes a **SX1301 LoRa concentrator**, which provides 10 programmable parallel demodulation paths.

LG308 has **pre-configured standard LoRaWAN frequency bands** to use for different countries.

User can also **customized the frequency bands** to use in their own LoRa network.

LG308 In a LoRaWAN IoT Network:

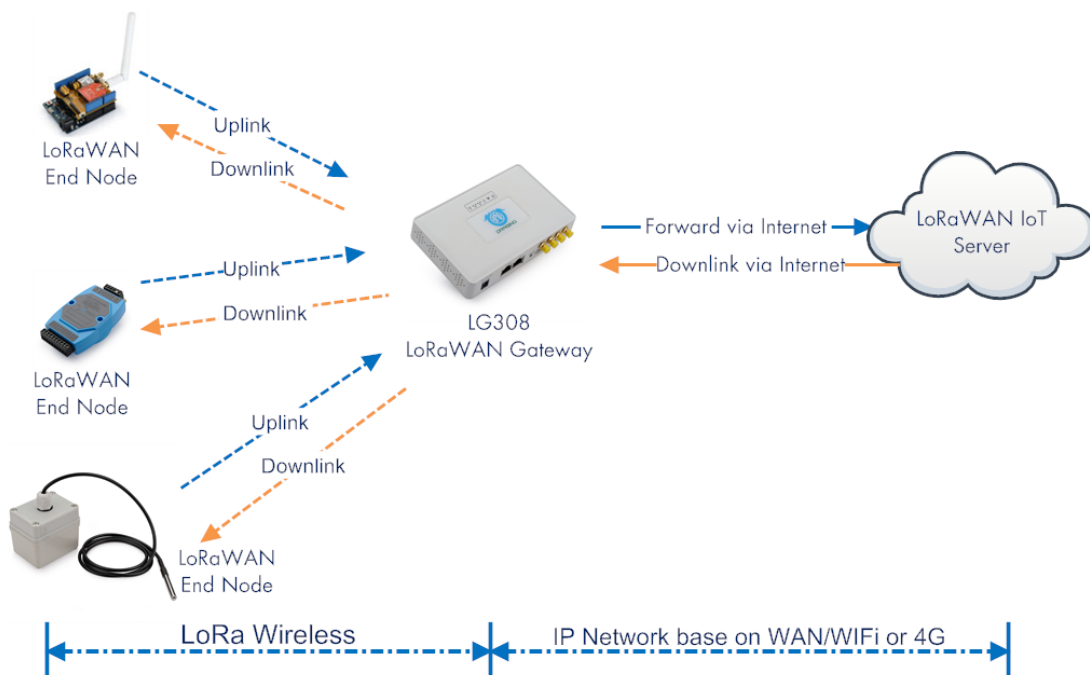

1.2 Specifications

Hardware System:

Linux Part:

- 400Mhz ar9331 processor
- 64MB RAM
- 16MB Flash

Interface:

- 10M/100M RJ45 Ports x 2
- WiFi : 802.11 b/g/n
- LoRaWAN Wireless
- Power Input: 12V DC, 1 A
- USB 2.0 host connector x 1
- Mini-PCI E connector x 1
- SX1301 + 2 x SX1257

WiFi Spec:

- IEEE 802.11 b/g/n
- Frequency Band: 2.4 ~ 2.462GHz
- Tx power:
 - ✓ 11n tx power : mcs7/15: 11db mcs0 : 17db
 - ✓ 11b tx power: 18db
 - ✓ 11g 54M tx power: 12db
 - ✓ 11g 6M tx power: 18db
- Wifi Sensitivity
 - ✓ 11g 54M : -71dbm
 - ✓ 11n 20M : -67dbm

LoRa Spec:

- Up to -142.5dBm sensitivity with SX1257 Tx/Rx front-end
- 70 dB CW interferer rejection at 1 MHz offset
- Able to operate with negative SNR, CCR up to 9dB
- Emulates 49x LoRa demodulators and 1x (G)FSK demodulator
- Dual digital TX&RX radio front-end interfaces
- 10 programmable parallel demodulation paths
- Dynamic data-rate (DDR) adaptation
- True antenna diversity or simultaneous dual-band operation

Cellular 4G LTE (optional):


- Quectel [EC25 LTE module](#)
- Micro SIM Slot
- External 4G Sticker Antenna.
- Up to 150Mbps downlink and 50Mbps uplink data rates
- Worldwide LTE, UMTS/HSPA+ and GSM/GPRS/EDGE coverage
- MIMO technology meets demands for data rate and link reliability in modern wireless communication systems

1.3 Features

- ✓ Open Source OpenWrt system
- ✓ Managed by Web GUI, SSH via LAN or WiFi
- ✓ Emulates 49x LoRa demodulators
- ✓ LoRaWAN Gateway
- ✓ 10 programmable parallel demodulation paths

1.4 Hardware System Structure

LG308 System Overview:

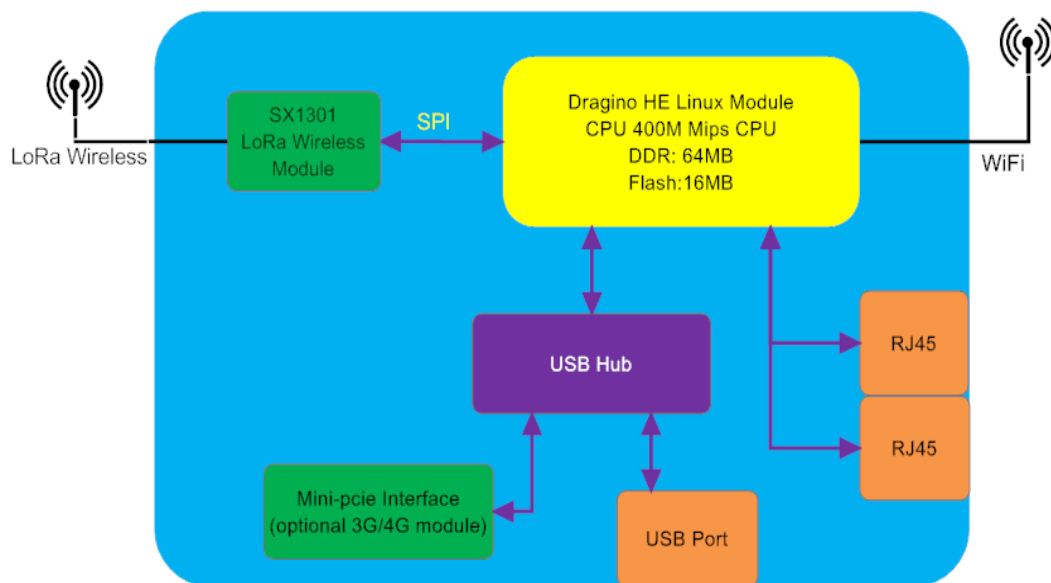

1.5 LG308 Applications



2. Access LG308

2.1 Access and configure LG308

The LG308 is configured as a WiFi AP by factory default. User can access and configure the LG308 after connect to its WiFi network.

At the first boot of LG308, it will auto generate an unsecure WiFi network call **dragino-xxxxxx**

User can use the laptop to connect to this WiFi network. The laptop will get an IP address 10.130.1.xxx and the LG308 has the default IP **10.130.1.1**



Open a browser in the laptop and type


<http://10.130.1.1/>

User will see the login interface of LG308.

The account for Web Login is:

User Name: root

Password: dragino

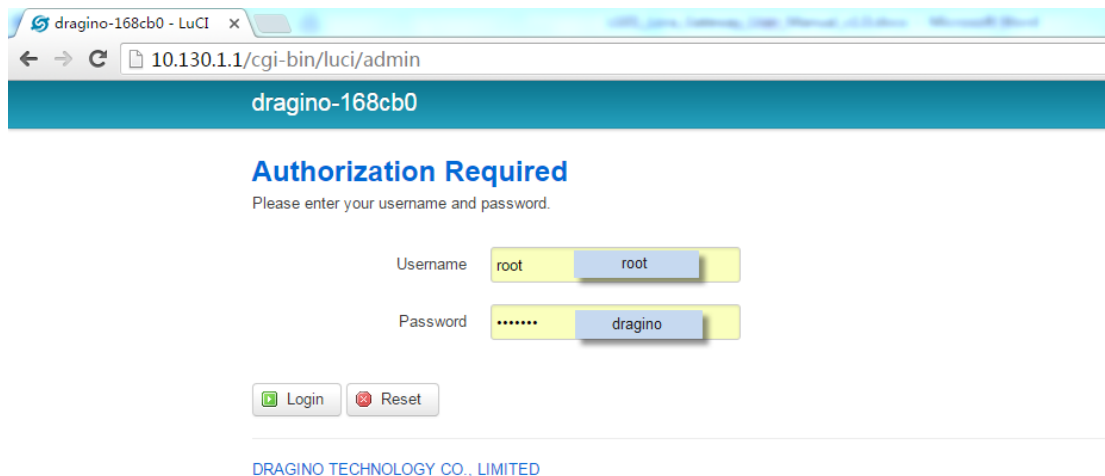

Notice: In case the WiFi network is disabled, user can connect PC to LG308's LAN port, the PC will get DHCP from LG308, and be able to access it.

Note: the LG308 can also be accessed via WAN interface (WAN port or WiFi when device acts as WiFi Client). But for security reason, for firmware version >5.3, the http access on WAN interface has been set to 8000, SSH access has been set to 2222.

3. Typical Network Setup


3.1 Overview

LG308 supports flexible network set up for different environment. This section describes the typical network topology can be set in LG308. The typical network set up includes:

- ✓ **WAN Port Internet Mode**
- ✓ **WiFi Client Mode**
- ✓ **WiFi AP Mode**
- ✓ **USB Dial Up Mode**

3.2 Use WAN port to access Internet

By default, the LG308 set to use WAN port as network connection. When connect LG308's WAN port to router, LG308 will get IP from router and have internet access. The network status can be checked as below:

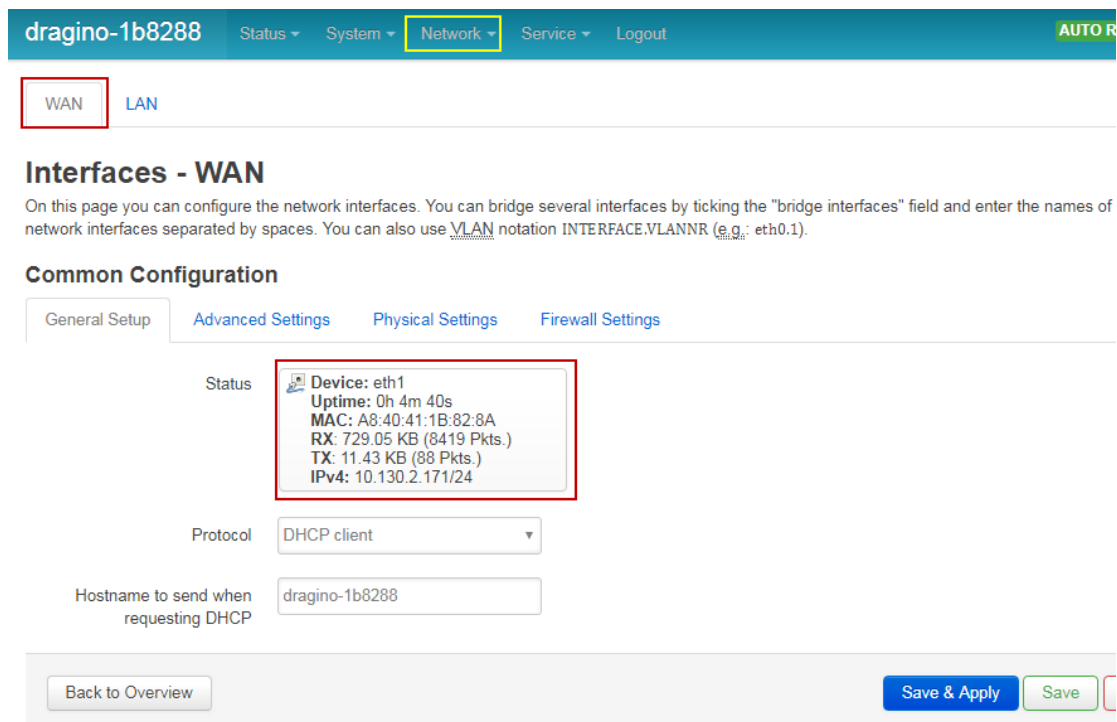

The screenshot shows the Dragino web interface for device 'dragino-1b8288'. The 'Network' tab is selected in the top navigation bar. Below it, the 'WAN' tab is highlighted. The main section is titled 'Interfaces - WAN'. A descriptive text explains that users can configure network interfaces, bridge them, or use VLAN notation. Below this is the 'Common Configuration' section with tabs for 'General Setup', 'Advanced Settings', 'Physical Settings', and 'Firewall Settings'. The 'General Setup' tab is active, showing the 'Status' of the WAN interface (eth1) with details like Uptime, MAC, RX/TX statistics, and IPv4 address. The 'Protocol' is set to 'DHCP client' and the 'Hostname to send when requesting DHCP' is 'dragino-1b8288'. At the bottom, there are buttons for 'Back to Overview', 'Save & Apply', and 'Save'.

dragino-1b8288 Status System **Network** Service Logout AUTO R


WAN LAN

Interfaces - WAN

On this page you can configure the network interfaces. You can bridge several interfaces by ticking the "bridge interfaces" field and enter the names of network interfaces separated by spaces. You can also use VLAN notation INTERFACE.VLANNR (e.g.: eth0.1).

Common Configuration

General Setup **Advanced Settings** Physical Settings Firewall Settings

Status
 **Device:** eth1
Uptime: 0h 4m 40s
MAC: A8:40:41:1B:82:8A
RX: 729.05 KB (8419 Pkts.)
TX: 11.43 KB (88 Pkts.)
IPv4: 10.130.2.171/24

Protocol DHCP client ▼

Hostname to send when requesting DHCP dragino-1b8288


Back to Overview Save & Apply Save

3.3 Access Internet as a WiFi Client.

In the WiFi Client Mode, Dragino acts as a WiFi client and gets DHCP from uplink router via WiFi. The step to set is as below:

Step1:

In network -> Wireless, select Radio0 interface and scan.

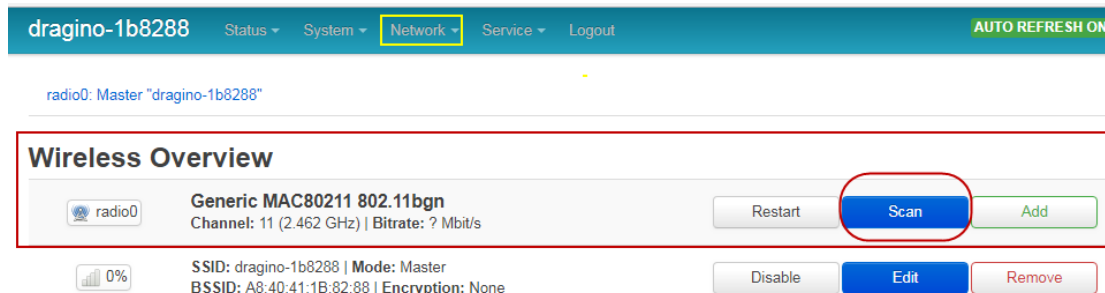

dragino-1b8288 Status System **Network** Service Logout AUTO REFRESH ON


radio0: Master "dragino-1b8288"

Wireless Overview

radio0	Generic MAC80211 802.11bgn Channel: 11 (2.462 GHz) Bitrate: ? Mbit/s	Restart	Scan	Add
0%	SSID: dragino-1b8288 Mode: Master BSSID: A8:40:41:1B:82:88 Encryption: None	Disable	Edit	Remove

Step2:


Select the wireless AP and join:

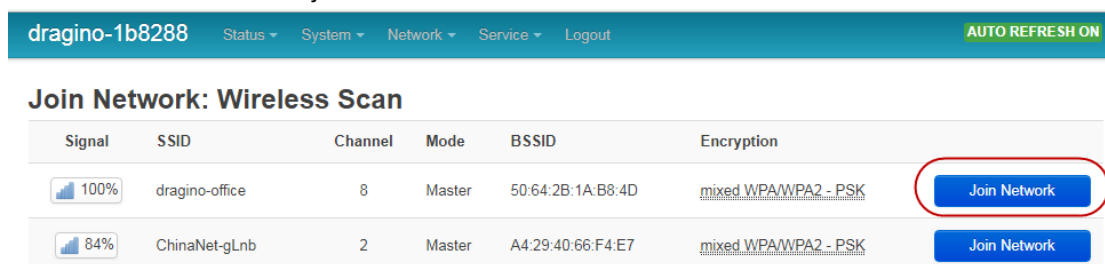

dragino-1b8288 Status System Network Service Logout AUTO REFRESH ON

Join Network: Wireless Scan

Signal	SSID	Channel	Mode	BSSID	Encryption	
100%	dragino-office	8	Master	50:64:2B:1A:B8:4D	mixed WPA/WPA2 - PSK	Join Network
84%	ChinaNet-gLnb	2	Master	A4:29:40:66:F4:E7	mixed WPA/WPA2 - PSK	Join Network

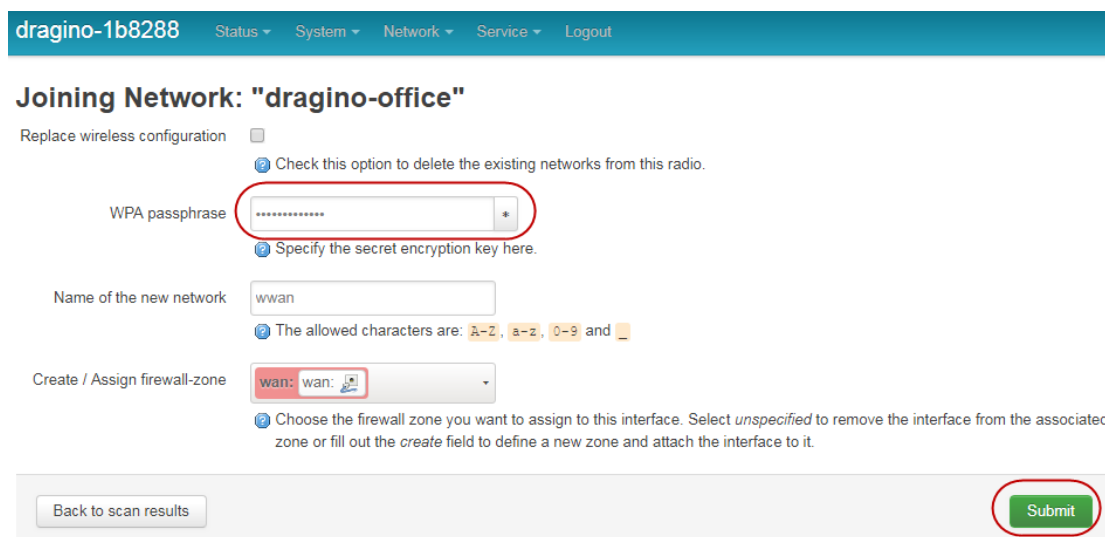

dragino-1b8288 Status System Network Service Logout

Joining Network: "dragino-office"

Replace wireless configuration ☐

☒ Check this option to delete the existing networks from this radio.

WPA passphrase:

☒ Specify the secret encryption key here.

Name of the new network:

☒ The allowed characters are: A-Z, a-z, 0-9 and _

Create / Assign firewall-zone:

☒ Choose the firewall zone you want to assign to this interface. Select *unspecified* to remove the interface from the associated zone or fill out the *create* field to define a new zone and attach the interface to it.

Step3:

In network->wireless page, disable WiFi AP network. Notice: After doing that, you will lose connection if your computer connects to the LG308 via LG308's wifi network.

dragino-1b8288
Status
System
Network
Service
Logout
UNSAVED CHANGES: 13
AUTO REFRESH ON

radio0: Master "dragino-1b8288"

Wireless Overview

radio0	Generic MAC80211 802.11bgn Channel: 11 (2.462 GHz) Bitrate: ? Mbit/s	Restart	Scan	Add
0%	SSID: dragino-1b8288 Mode: Master BSSID: A8:40:41:1B:82:88 Encryption: None	Disable	Edit	Remove
0%	SSID: dragino-office Mode: Client BSSID: 50:64:2B:1A:B8:4D Encryption: -	Disable	Edit	Remove

Associated Stations




Network	MAC-Address	Host	Signal / Noise	RX Rate / TX Rate
No information available				

After successful associate, the WiFi network interface can be seen in the same page:

dragino-1b8288
Status
System
Network
Service
Logout
AUTO REFRESH ON

WAN WWAN LAN

Interfaces

LAN  br-lan	Protocol: Static address Uptime: 2h 0m 4s MAC: A8:40:41:1B:82:8B RX: 1.40 MB (13346 Pkts.) TX: 2.79 MB (10321 Pkts.) IPv4: 10.130.1.1/24	Restart Stop Edit Delete
WAN  eth1	Protocol: DHCP client MAC: A8:40:41:1B:82:8A RX: 4.30 MB (51840 Pkts.) TX: 55.77 KB (429 Pkts.)	Restart Stop Edit Delete
WWAN  Client "dragino-office"	Protocol: DHCP client Uptime: 0h 6m 6s MAC: A8:40:41:1B:82:88 RX: 549.38 KB (5659 Pkts.) TX: 14.90 KB (94 Pkts.) IPv4: 10.130.2.169/24	Restart Stop Edit Delete


Add new interface...

Save & Apply Save Reset

3.4 Use built-in 4G modem for internet access


For the LG308 model with 4G version, user can configure the modem for internet access.

Step 1: Add New Interface

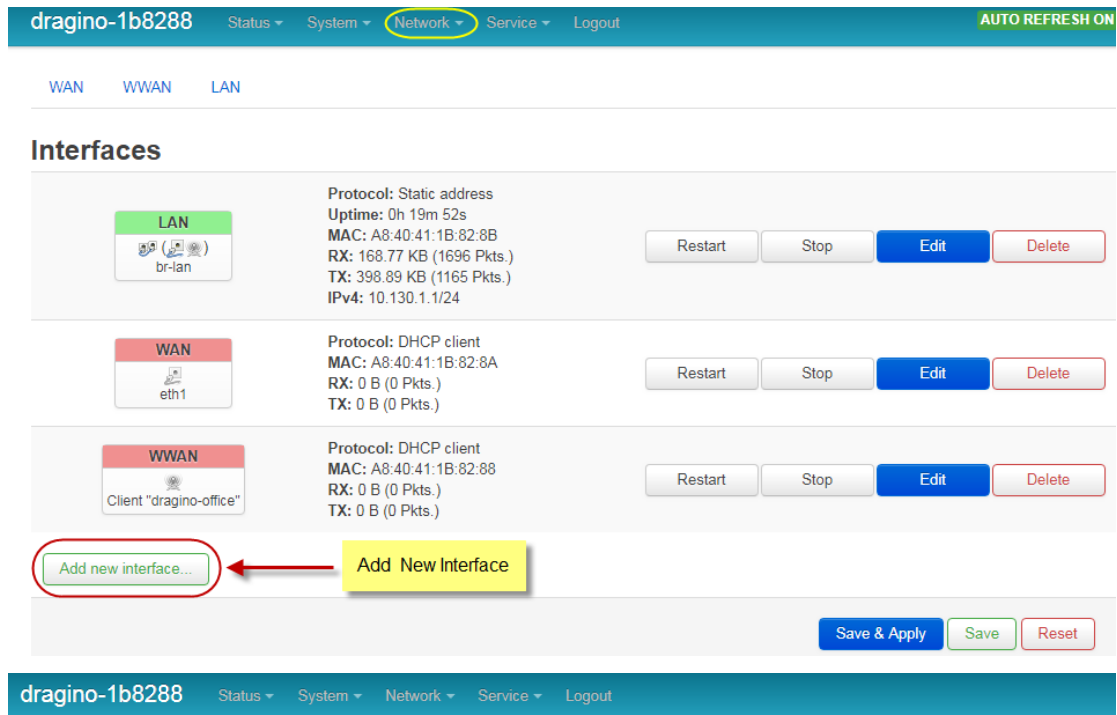

The screenshot shows the Dragino web interface for device 'dragino-1b8288'. The 'Network' menu item is selected. Below the navigation bar, there are tabs for 'WAN', 'WWAN', and 'LAN'. The 'Interfaces' section lists three interfaces: LAN (br-lan), WAN (eth1), and WWAN (Client "dragino-office"). Each interface has details like Protocol, Uptime, MAC, RX/TX statistics, and IPv4 address. At the bottom of the list, there is a button labeled 'Add new interface...' which is circled in red. A yellow callout box with the text 'Add New Interface' points to this button. Below the list, there are buttons for 'Save & Apply', 'Save', and 'Reset'.

Create Interface

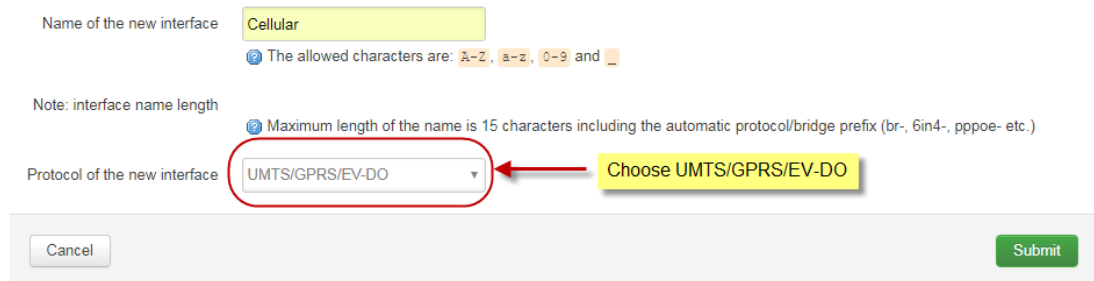

The screenshot shows the 'Create Interface' form. The 'Name of the new interface' field is set to 'Cellular'. Below it, a note states: 'Note: interface name length'. A help icon indicates: 'The allowed characters are: A-Z, a-z, 0-9 and _'. Another note states: 'Maximum length of the name is 15 characters including the automatic protocol/bridge prefix (br-, 6in4-, pppoe- etc.)'. The 'Protocol of the new interface' dropdown is set to 'UMTS/GPRS/EV-DO', which is circled in red. A yellow callout box with the text 'Choose UMTS/GPRS/EV-DO' points to this dropdown. At the bottom, there are 'Cancel' and 'Submit' buttons.

Step 2: Configure cellular interface


dragino-1b8288 Status System Network Service Logout **UNSAVED C**

Interfaces - CELLULAR

On this page you can configure the network interfaces. You can bridge several interfaces by ticking the "bridge interfaces" field and network interfaces separated by spaces. You can also use VLAN notation INTERFACE.VLANNR (e.g.: eth0.1).

Common Configuration

General Setup Advanced Settings Firewall Settings

Status  Device: 3g-Cellular
RX: 0 B (0 Pkts.)
TX: 0 B (0 Pkts.)

Protocol UMTS/GPRS/EV-DO

Modem device /dev/ttyUSB2 Use ttyUSB2 to dial up

Service Type UMTS/GPRS

APN 3gnet Different provider has different APN

PIN

PAP/CHAP username

PAP/CHAP password Some provider may need additional user info


Dial number *99***1#

Step 3: Check Result

dragino-1b8288 Status System Network Service Logout **AUTO REFRESH ON**

WAN WWAN **CELLULAR** LAN

Interfaces

<div>CELLULAR</div> <div> 3g-Cellular</div>	Protocol: UMTS/GPRS/EV-DO Uptime: 0h 0m 49s MAC: 00:00:00:00:00:00 RX: 116 B (6 Pkts.) TX: 680 B (16 Pkts.) IPv4: 10.160.169.29/32	Restart Stop Edit Delete
--	---	---------------------------------

Get IP from provider means dial up

Note: In case you don't know whether your device has 4G modem, you can run `lsusb` command in SSH access to check, as below:

```
10.130.1.1 - SecureCRT
文件(F) 编辑(E) 查看(V) 选项(O) 传输(T) 脚本(S) 工具(L) 帮助(H)
10.130.1.1
root@dragino-1b8288:~# lsusb
Bus 001 Device 003: ID 2c7c:0125 Terminus Technology, Inc. Hub
Bus 001 Device 001: ID 1d6b:0002 Linux Foundation 2.0 USB
root@dragino-1b8288:~#
root@dragino-1b8288:~#
```

use lsusb command

This is the 4G modem

3.5 Check Internet connection

User can use the diagnostics page to check and analyze Internet connection.

dragino-1b8288

Status ▾

System ▾

Network ▾

Service ▾

Logout

Diagnostics

Network Utilities

openwrt.org

IPv4 ▾

Ping

openwrt.org

Traceroute

openwrt.org

Nslookup

Install iputils-traceroute6 for IPv6 traceroute


```
PING openwrt.org (139.59.209.225): 56 data bytes
64 bytes from 139.59.209.225: seq=0 ttl=45 time=386.898 ms
64 bytes from 139.59.209.225: seq=1 ttl=45 time=401.656 ms
64 bytes from 139.59.209.225: seq=2 ttl=45 time=387.708 ms
64 bytes from 139.59.209.225: seq=3 ttl=45 time=378.894 ms
64 bytes from 139.59.209.225: seq=4 ttl=45 time=384.156 ms

--- openwrt.org ping statistics ---
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max = 378.894/387.862/401.656 ms
```

4. Example : Configure as a LoRaWAN gateway

LG308 is fully compatible with LoRaWAN protocol. It use the legacy Semtech Packet forwarder to forward the LoRaWAN packets to server, the structure is as below.

LG308 In a LoRaWAN IoT Network:

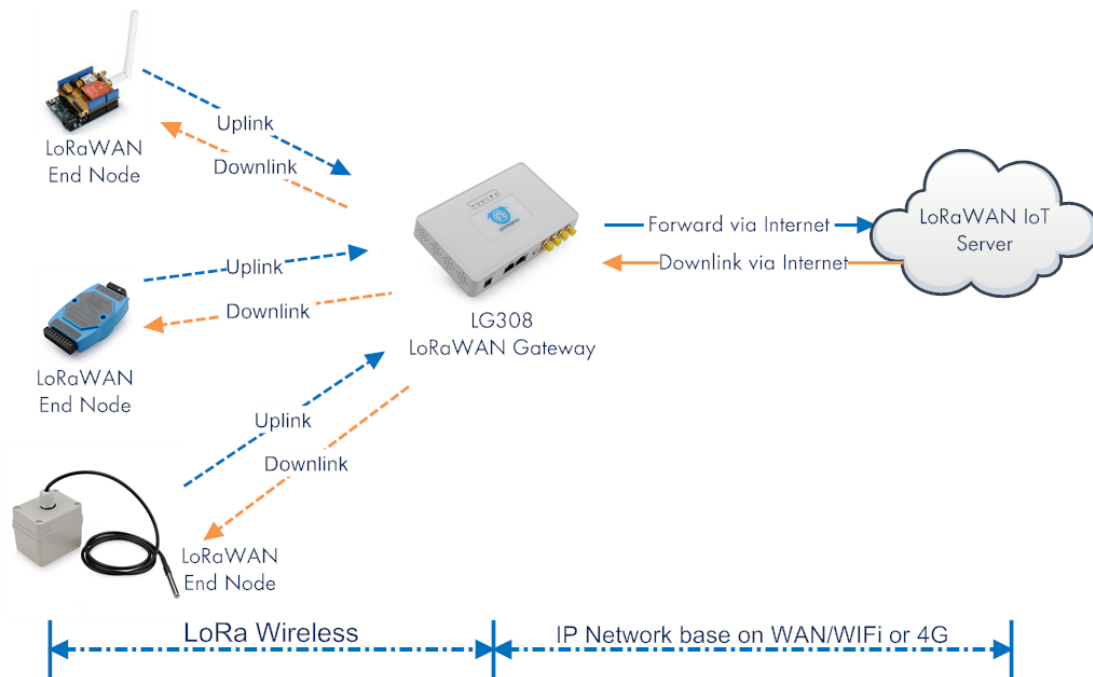

This chapter describes how to use LG308 to work with [TTN LoRaWAN Server](#). The method to work with other LoRaWAN server is similar.

4.1 Create a gateway in TTN Server

Step 1: Get a Unique gateway ID.

Every LG308 has a unique gateway id. The id can be found at LoRaWAN page:

dragino-1b8288
Status ▾ System ▾ Network ▾ Service ▾ Logout

LoRa Gateway Settings

Configuration to communicate with LoRa devices and LoRaWAN server

LoRaWAN Server Settings

Server Address

Server Port

Gateway ID


Mail Address

Latitude



Longitude

The gateway id is: **a840411b8268ffff**

Step 2: Sign up a user account in TTN server

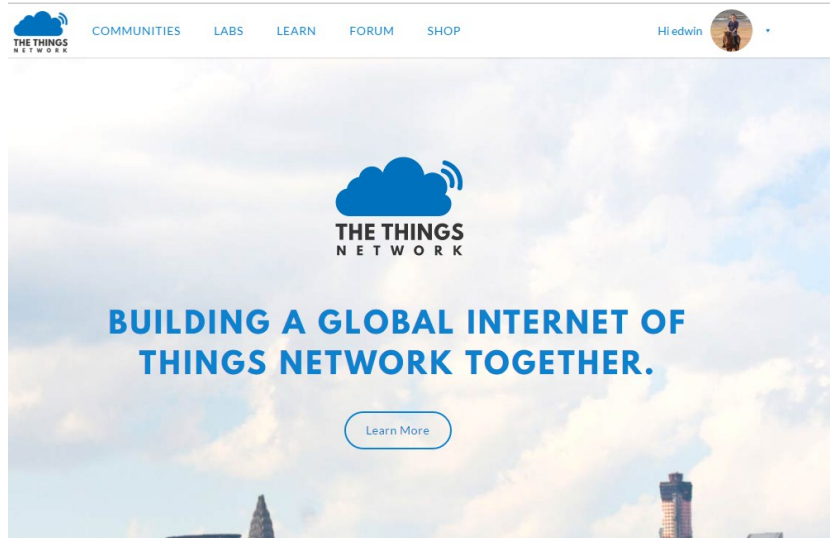

Step 3: Create a Gateway

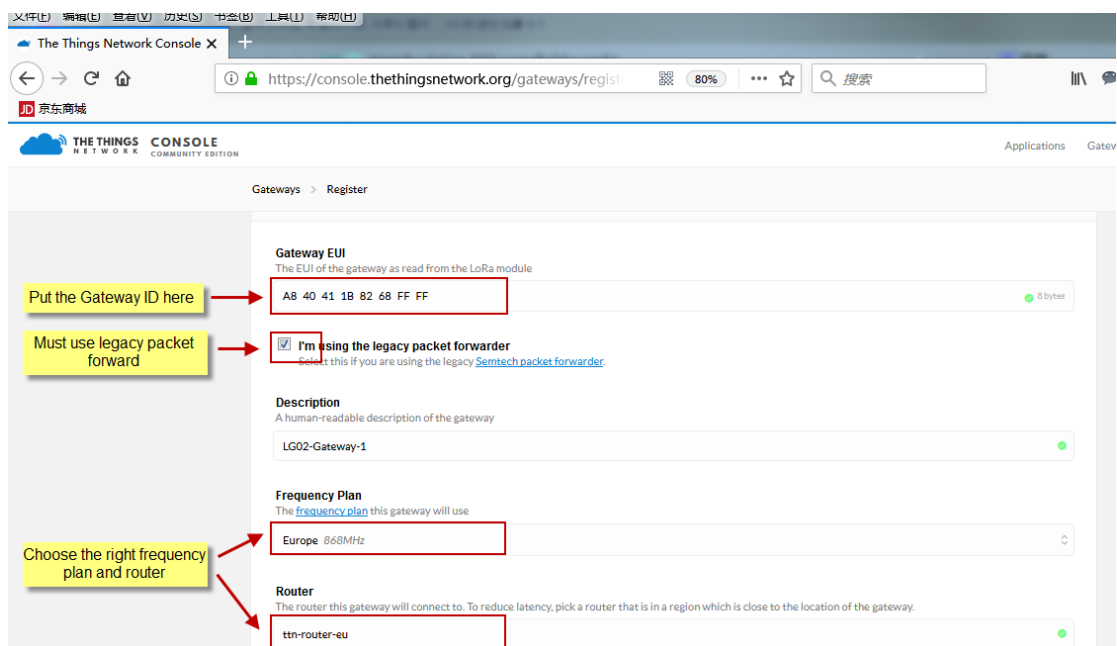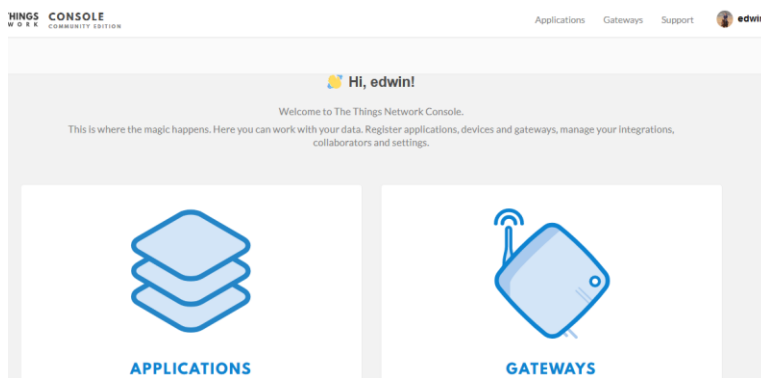


After create the gateway, we can see the gateway info, as below

GATEWAY OVERVIEW ⚙ settings

Gateway ID eui-a840411b8268ffff

Description Gateway-1

Owner  **edwin** [Transfer ownership](#)

Status not connected

Frequency Plan Europe 868MHz

Router ttn-router-eu

Gateway Key base64

4.2 Configure LG308 to connect to TTN

We should configure the LG308 now to let it connect to TTN network. Make sure your LG308 has Internet Connection first.

Step1: Configure LG308 to act as raw forwarder

dragino-1b8288
Status ▾
System ▾
Network ▾
Service ▾
Logout

IoT Service

IoT Service Lorawan/RAW forwarder ▾

Debug Level No debug ▾

Save & Apply
Save
Reset

DRAGINO TECHNOLOGY CO., LIMITED

Step2: Input server info and gateway id

Choose the correct the server address and gateway ID.

dragino-1b8288
Status ▾
System ▾
Network ▾
Service ▾
Logout

LoRa Gateway Settings

Configuration to communicate with LoRa devices and LoRaWAN server

LoRaWAN Server Settings

Service Provider
The Things Network ▾

Server Address
ttn-router-eu ▾

Server Port
1700

Gateway ID
a840411b8268ffff


Mail Address
edwin@dragino.com

Latitude
22.73

Longitude
114.23


Check Result

After above settings, the LG308 should be able to connect to TTN, below is the result seen from TTN:

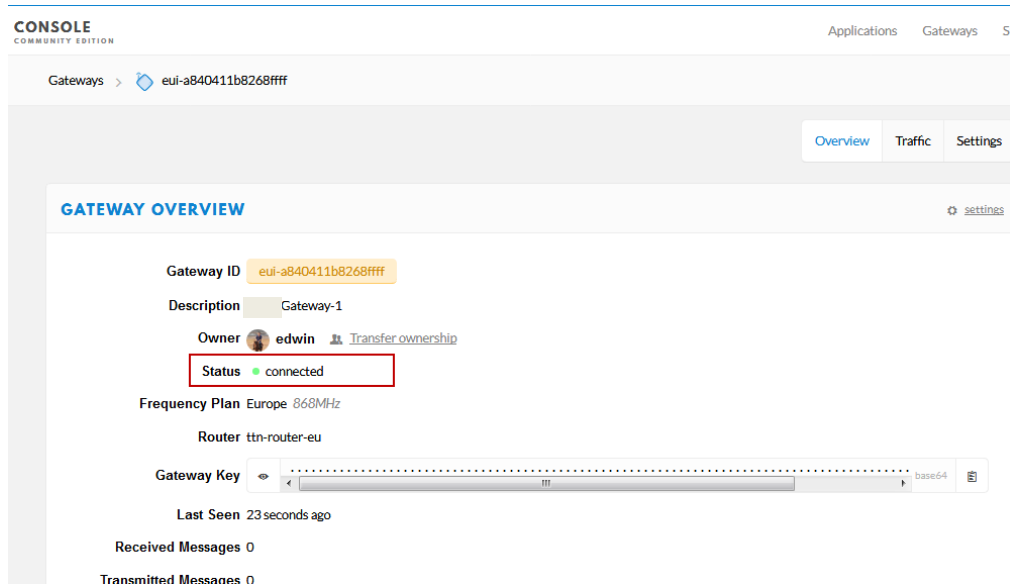

The screenshot shows the TTN Console Gateway Overview page. The gateway ID is eui-a840411b8268ffff. The description is Gateway-1. The owner is edwin. The status is connected (highlighted with a red box). The frequency plan is Europe 868MHz. The router is ttn-router-eu. The gateway key is shown in a base64 encoded format. The last seen time is 23 seconds ago. The received and transmitted messages are both 0.

4.3 Configure frequency

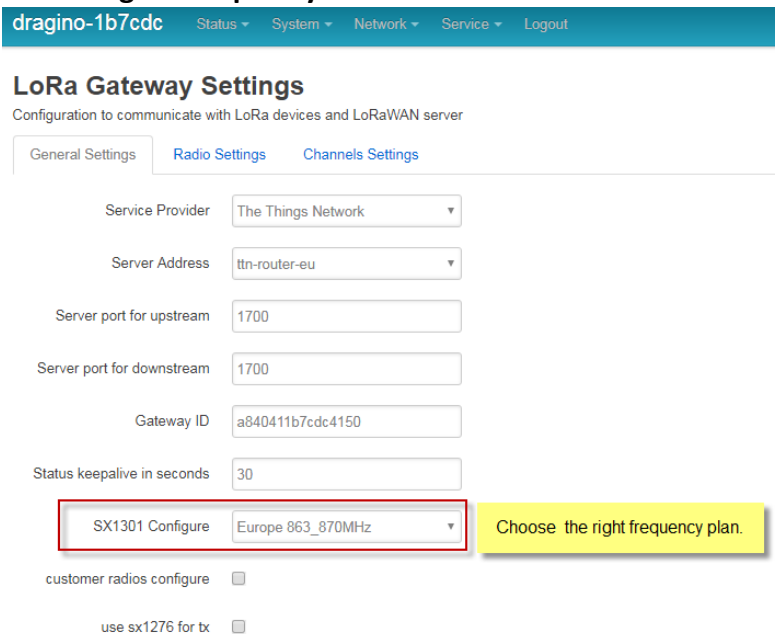

The screenshot shows the LoRa Gateway Settings page in the dragino-1b7cdc interface. The settings are as follows:

- Service Provider: The Things Network
- Server Address: ttn-router-eu
- Server port for upstream: 1700
- Server port for downstream: 1700
- Gateway ID: a840411b7cdc4150
- Status keepalive in seconds: 30
- SX1301 Configure: Europe 863_870MHz (highlighted with a red box)
- customer radios configure: ☐
- use sx1276 for tx: ☐

A yellow box highlights the SX1301 Configure dropdown with the text "Choose the right frequency plan."

After doing above LG308 will be able to act as LoRaWAN. Below section shows how to add a LoRaWAN End device in this LoRaWAN network and see the data from TTN.

We use LT-33222-L as a reference below, for other LoRaWAN devices will be more or less the same.


4.4 Add a LoRaWAN End Device



Step 1: Create a device in TTN with the OTAA keys from LT IO controller.
Each LT is shipped with a sticker with the default device EUI as below:



User can enter this key in their LoRaWAN Server portal. Below is TTN screen shot:
Add APP EUI in the application.

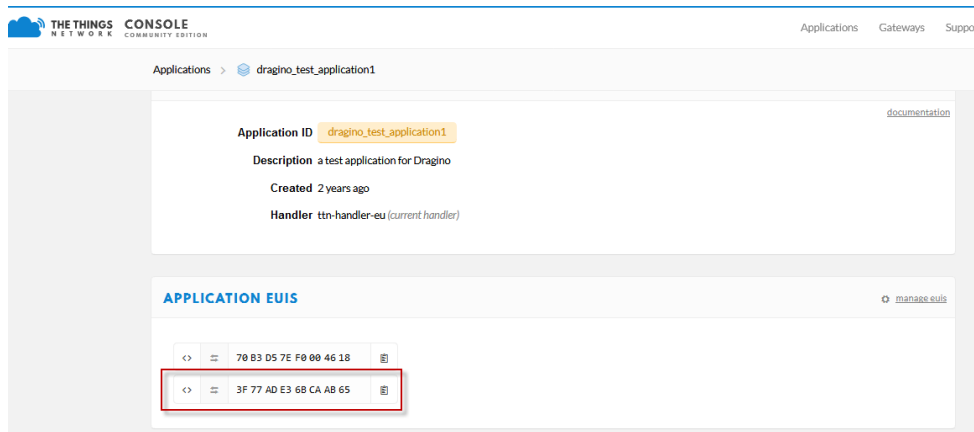

Add APP KEY and DEV EUI

THE THINGS NETWORK CONSOLE COMMUNITY EDITION

Applications Gateways Support

Applications > dragino_test_application1 > Devices

REGISTER DEVICE [bulk import devices](#)

Device ID
This is the unique identifier for the device in this app. The device ID will be immutable.
It-33222-I-5480

Device EUI
The device EUI is the unique identifier for this device on the network. You can change the EUI later.
A8 40 41 00 01 81 85 48

App Key
The App Key will be used to secure the communication between you device and the network.
57 4E 37 E6 8A EC FC CD B3 89 3D 87 A9 38 4B 2C

App EUI
3F 77 AD E3 68 CA AB 65

Step 2: Power on LT and it will auto join to the TTN network. After join success, it will start to upload message to TTN and user can see in the panel and analyze the data

ONSOLE COMMUNITY EDITION

Applications Gateways Settings

Applications > dragino_test_application1 > Devices > It-33222-I-5362 > Data

Overview **Data** Settings

APPLICATION DATA [pause](#) [clear](#)

Filters: [uplink](#) [downlink](#) [activation](#) [ack](#) [error](#)


time	counter	port	retry	payload
16:54:53	0	2	retry	00 02 01 36 04 C1 04 C2 38
16:54:47				dev addr: 26 01 2C 6B app eui: FCDEC9B2D32FA6 61 dev eui: A8 40 41 00
16:54:40				dev addr: 26 01 2C 85 app eui: FCDEC9B2D32FA6 61 dev eui: A8 40 41 00
16:54:33				dev addr: 26 01 2E EC app eui: FCDEC9B2D32FA6 61 dev eui: A8 40 41 00

5. Linux System

The LG308 bases on OpenWrt Linux System. It is open source, and user are free to configure and modify the inside Linux settings.

5.1 SSH Access for Linux console

User can access to the Linux console via SSH protocol. Make sure your PC and the LG01 is in the same network, then use a SSH tool (such as [putty](#)) to access it. Below are screenshots:

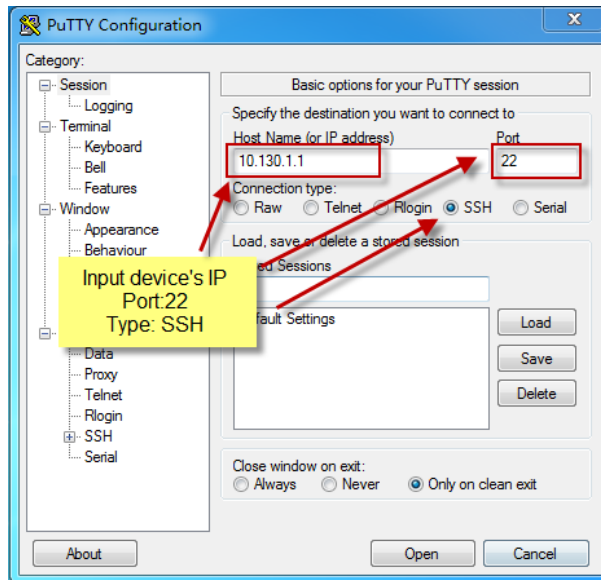

IP address: IP address of LG308


Port: 22 or 2222

User Name:

root


Password: **dragino** (default)

After log in, you will be in the Linux console and type command here.

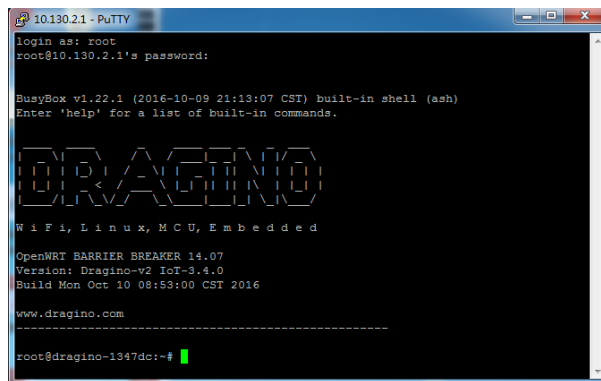

5.2 Edit and Transfer files

The LG308 support **SCP protocol** and has a built **SFTP server**. There are many ways to edit and transfer files using these two protocols. One of the easiest is through [WinSCP](#) utility. After access via WinSCP to the device, use can use a FTP alike window to drag / drop files to the LG308 or Edit the files directly in the windows. Screenshot is as below:

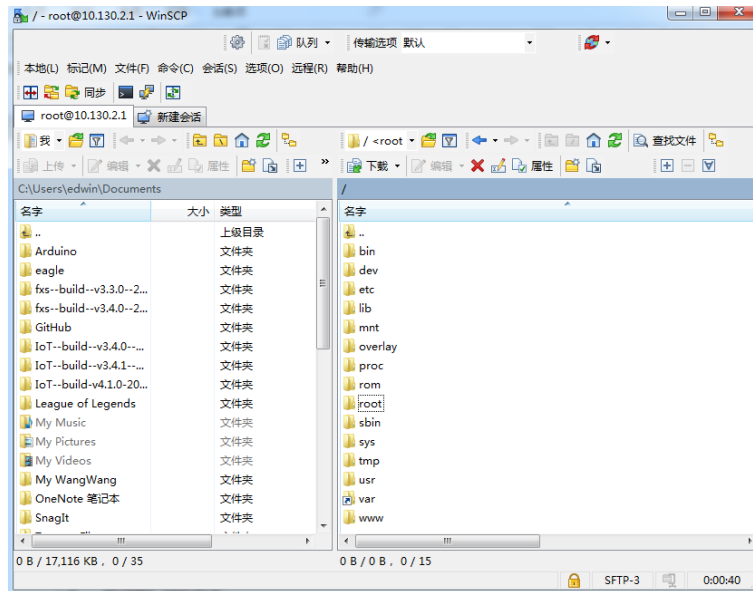

5.3 File System

The LG308 has a 16MB flash and a 64MB RAM. The /var and /tmp directory are in the RAM, contents stored in /tmp and /var will be erased after reboot the device. Other directories are in the flash and will keep after reboot.

The Linux system use around 8MB ~10MB flash size which means there is not much room for user to store data in the LG308 flash. User can use an external USB flash to extend the size for storage.

5.4 Package maintain system

LG308 uses [OPKG package maintain system](#). There are more than 3000+ packages available in our package server for user to install for their applications. For example, if user wants to add iperf tool, they can install the related packages and configure LG308 to use iperf

Below is some examples opkg command, more please refer [OPKG package maintain system](#)

In Linux Console run:

```
root@dragino-169d30:~# opkg update // to get the latest packages list
```

```
root@dragino-169d30:~# opkg list //shows the available packages
```

```
root@dragino-169d30:~# opkg install iperf // install iperf, it will auto install the required packages.
```

```
root@dragino-169d30:/etc/opkg# opkg install iperf
```

```
Installing iperf (2.0.12-1) to root...
```

```
Downloading http://downloads.openwrt.org/snapshots/packages/mips_24kc/base/iperf_2.0.12-1_mips_24kc.ipk
```

```
Installing uclibcxx (0.2.4-3) to root...
```

```
Downloading
```

```
http://downloads.openwrt.org/snapshots/packages/mips_24kc/base/uclibcxx_0.2.4-3_mips_24kc.ipk
```

```
Configuring uclibcxx.
```

```
Configuring iperf.
```

6. Upgrade Linux Firmware


We keep improving the LG308 Linux side firmware for new features, bug fixes. The latest firmware can be found on [LoRa Gateway Firmware](#), and the Change Log can be found here: [Firmware Change Log](#).

The file named as **xxxxx--xxxxx-squashfs-sysupgrade.bin** is the upgrade Image. There are different methods to upgrade, as below:

6.1 Upgrade via Web UI

Go to the page: **Web --> System --> Back Up and flash firmware**, Select the image and click Flash Image, the image will be uploaded to the device and then click Process Update to upgrade.

System will auto boot to the new firmware after upgrade.

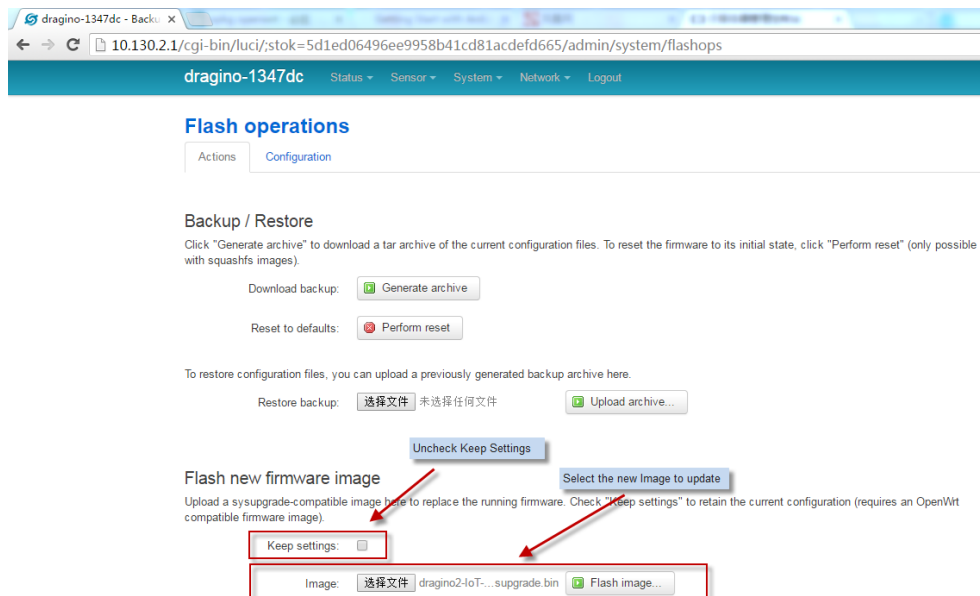

6.2 Upgrade via Linux console

SCP the firmware to the system **/var** directory and then run

```
root@OpenWrt:~# /sbin/sysupgrade -n /var/Your_Image
```

note: it is important to transfer the image in the **/var** directory, otherwise it may exceed the flash size.

7. FAQ

7.1 How can I configure for customized frequency band?

User can customized their LoRaWAN channel since firmware after 2018-Dec-28.

For example: if user want to set the gateway to meet the India LoRoIT frequency band:

LoRoIT Frequency plan for India

Channel	Frequency	Modulation / BW	
0	865.400 MHz	MultiSF	125 kHz
1	865.600 MHz	MultiSF	125 kHz
2	865.800 MHz	MultiSF	125 kHz
3	866.000 MHz	MultiSF	125 kHz
4	866.200 MHz	MultiSF	125 kHz
5	866.400 MHz	MultiSF	125 kHz
6	866.600 MHz	MultiSF	125 kHz
7	866.800 MHz	MultiSF	125 kHz
LoRa	865.700 MHz	SF7	250 kHz
FSK	865.700 MHz	FSK	250 kHz, 64 kbps
RX2 channel (downlink)			
RX2	865.200 MHz	SF12	125 kHz

Step 1: Choose Frequency Band to use “Customized Bands”

LoRa Gateway Settings

Configuration to communicate with LoRa devices and LoRaWAN server

General Settings
Radio Settings
Channels Settings

IoT Service
LoRaWAN/RAW forwarder

Debug Level
Little message output

Service Provider
The Things Network

Server Address
ttn-router-eu

Server port for upstream
1700

Server port for downstream
1700

Gateway ID
a840411b7e104150

Status keepalive in seconds
30

Frequency Plan
Customized Bands

Step 2: Configure Radio 0 & 1 Frequency

The LG308 has two Radios from SX1308, we can configure these eight channels base on these two radios. Go to page Radio Settings and enable Radio 0 to 865700000 / enable Radio 1 to 866500000.

General Settings
Radio Settings
Channels Settings

radio 0 enable ☒

Radio_0 frequency

Radio_0 for tx ☒

Radio_0 tx min frequency

Radio_0 tx max frequency

radio 1 enable ☒

Radio_1 frequency

Radio_1 for tx ☐

Step 3: Configure Channel Frequency.

What we need to configure for LoRiot is 0~7 multiSF channel frequency and LoRa frequency as per LoRiot frequency plan.

Each Channel Configure include below parameters:

- ✓ Radio used for this channel.
- ✓ Channel IF, frequency shift base on Radio Frequency.

Below is the settings for the LoRiot frequency plan:

General Settings
Radio Settings
Channels Settings

multiSF channel 0 enable ☒

Channel 0 frequency=radio0 – 300000Hz
= 865700000-300000 = 865.4Mhz

multiSF channel 0 radio

multiSF channel 0 IF

multiSF channel 1 enable ☒

Channel 1 frequency= 865.6Mhz

multiSF channel 1 radio

multiSF channel 1 IF

multiSF channel 2 enable ☒

Channel 2 frequency= 865.8Mhz

multiSF channel 2 radio

multiSF channel 2 IF

multiSF channel 3 enable	<input checked="" type="checkbox"/>	Channel 3 frequency= 866.0Mhz
multiSF channel 3 radio	<input type="text" value="radio0"/>	
multiSF channel 3 IF	<input type="text" value="300000"/>	
multiSF channel 4 enable	<input checked="" type="checkbox"/>	Channel 4 frequency= 866.2Mhz
multiSF channel 4 radio	<input type="text" value="radio1"/>	
multiSF channel 4 IF	<input type="text" value="-300000"/>	
multiSF channel 5 enable	<input checked="" type="checkbox"/>	Channel 5 frequency= 866.4Mhz
multiSF channel 5 radio	<input type="text" value="radio1"/>	
multiSF channel 5 IF	<input type="text" value="-100000"/>	
multiSF channel 6 enable	<input checked="" type="checkbox"/>	Channel 6 frequency= 866.6Mhz
multiSF channel 6 radio	<input type="text" value="radio1"/>	
multiSF channel 6 IF	<input type="text" value="100000"/>	
multiSF channel 7 enable	<input checked="" type="checkbox"/>	Channel 7 frequency= 866.8Mhz
multiSF channel 7 radio	<input type="text" value="radio1"/>	
multiSF channel 7 IF	<input type="text" value="300000"/>	
lorastd channel enable	<input checked="" type="checkbox"/>	Channel LoRaSTD frequency= 865.7Mhz, SF7, BW250Khz
LoRa channel radio	<input type="text" value="radio0"/>	
LoRa channel IF	<input type="text" value="0"/>	
LoRa channel SF	<input type="text" value="7"/>	
LoRa channel BW	<input type="text" value="250k"/>	

Step 4: Save & Apply & check result in logread page.

Logread

FreqINFO	Report	RxTxJson	ErrorMSG
<pre> SX1301 Channels frequency ----- chan_multiSF_0 LORA MAC, 125kHz, all SF, 865400000 Hz ----- chan_multiSF_1 LORA MAC, 125kHz, all SF, 865600000 Hz ----- chan_multiSF_2 LORA MAC, 125kHz, all SF, 865800000 Hz ----- chan_multiSF_3 LORA MAC, 125kHz, all SF, 866000000 Hz ----- chan_multiSF_4 LORA MAC, 125kHz, all SF, 866200000 Hz ----- chan_multiSF_5 LORA MAC, 125kHz, all SF, 866400000 Hz ----- </pre>			

7.2 Can I make my own firmware for LG308? Where can I find the source code of LG308?

Yes, User can make own firmware for LG308 for branding purpose or add customized application. The LG308 source code and compile instruction can be found at:

https://github.com/dragino/openwrt_lede-18.06

7.3 Can I use the 868Mhz version for 915Mhz bands?

It is possible, you can select US915 frequency band in 868Mhz version hardware, it will work but you will see performance is highly decrease because the 868Mhz version has RF filter for band 863~870Mhz, all other frequency will have high attenuation.

7.4 Can I control the LEDs?

Except the PWR LED is controlled by +3v3 power directly. All other LEDs can be controlled by developer.

Control Globe LED:

ON: echo 1 > /sys/class/leds/dragino2\:red\:wlan/brightness

OFF: echo 0 > /sys/class/leds/dragino2\:red\:wlan/brightness

Control HEART LED:

First export the gpio27 and set to out

echo 27 > /sys/class/gpio/export

echo out > /sys/class/gpio/gpio27/direction

ON: echo 0 > /sys/class/gpio/gpio27/value

OFF: echo 1 > /sys/class/gpio/gpio27/value

7.5 More FAQs about general LoRa questions

We keep updating more FAQs in our Wiki about some general questions. The link is here:

http://wiki.dragino.com/index.php?title=LoRa_Questions

8. Trouble Shooting

8.1 I get kernel error when install new package, how to fix?

In some case, when install package, it will generate kernel error such as below:

```
root@dragino-16c538:~# opkg install kmod-dragino2-si3217x_3.10.49+0.2-1_ar71xx.ipk
Installing kmod-dragino2-si3217x (3.10.49+0.2-1) to root...
Collected errors:
* satisfy_dependencies_for: Cannot satisfy the following dependencies for
kmod-dragino2-si3217x:
*   kernel (= 3.10.49-1-4917516478a753314254643facdf360a) *
* opkg_install_cmd: Cannot install package kmod-dragino2-si3217x.
```

In this case, user can use the `--force-depends` option to install such package.

```
opkg install kmod-dragino2-si3217x_3.10.49+0.2-1_ar71xx.ipk --force-depends
```


8.2 How to recover the LG308 if firmware crash

LG308 provide user a full control on its Linux system, it is possible that the device will brick and can't boot after improper modification in some booting files.

In this case, user can recover the whole Linux system by uploading a new firmware via Web Failsafe mode.

Procedure is as below:

- Use a RJ45 cable to connect the PC to LG308's port directly.
- Set the PC to ip 192.168.255.x, netmask 255.255.255.0
- Pressing the toggle button and power on the device
- All LEDs of the device will blink, release the toggle button after four blinks
- All LEDs will then blink very fast once, this means device detect a network connection and enter into the web-failsafe mode. Your PC should be able to ping 192.168.255.1 after device enter this mode.
- Open 192.168.255.1 in web browser
- Select a squashfs-sysupgrade type firmware and update firmware.

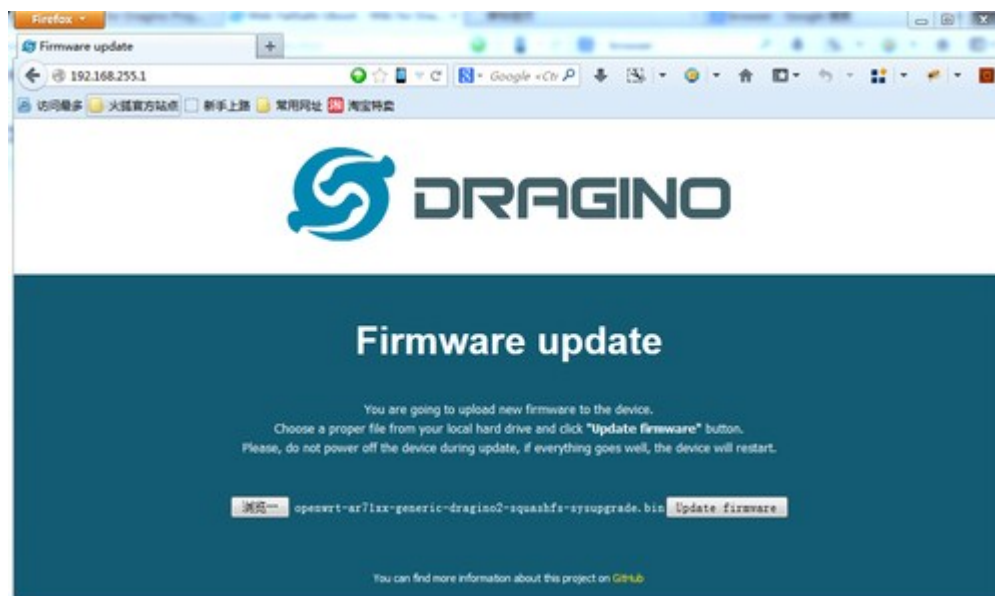

Note: If user sees all LEDs blink very fast in Step 5. This means the network connection is established. If in this case, PC still not able to see the web page, user can check:

- ✓ Try different browser.
- ✓ Check if your PC is in 192.168.255.x
- ✓ Check if you have connected two RJ45 cable to device, If so, remove the unused one

8.3 I configured LG308 for WiFi access and lost its IP. What to do now?


The LG01 has a fall-back ip in its LAN port. This IP is always enabled so user can use fall back ip to access LG01 no matter what the WiFi IP is. The fall back ip is useful for connect and debug the unit.

(Note: fallback ip can be disabled in the LAN and DHCP page)

Steps to connect via fall back IP:

1. Connect PC's Ethernet port to LG01's LAN port
2. Configure PC's Ethernet port has IP: 172.31.255.253 and netmask: 255.255.255.252

As below photo:

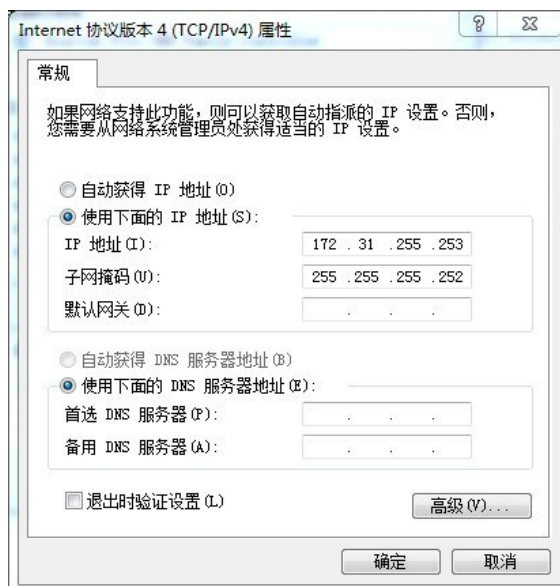

3. In PC, use 172.31.255.254 to access LG01 via Web or Console.

8.4 How can I see if the SIM card is connected insert?

```
root@dragino-1bbd90:~# comgt -d /dev/ttyUSB3
```

SIM ready

Waiting for Registration..(120 sec max)

Registered on Home network: "CHN-CT",7

Signal Quality: 19,99

```
root@dragino-1bbd90:~#
```


9. Order Info

PART: LG308-XXX-YYY:

XXX: Frequency Band

- **868**: valid frequency: 863Mhz ~ 870Mhz. for band EU868 or IN865.
- **915**: valid frequency: 902Mhz ~ 928Mhz. for bands US915, AU915, AS923 or KR920

YYY: 4G Cellular Option

- **EC25-E**: EMEA, Korea, Thailand, India.
- **EC25-A**: North America/ Rogers/AT&T/T-Mobile.
- **EC25-AU**: Latin America, New Zeland, Taiwan
- **EC25-J**: Japan, DOCOMO/SoftBank/ KDDI

More info about valid bands, please see [EC25-E product page](#).

10. Packing Info

Package Includes:

- ✓ LG308 or LG08 LoRa Gateway x 1
- ✓ Stick Antenna for LoRa RF part. Frequency is one of 433 or 868 or 915Mhz depends the model ordered
- ✓ Power Adapter: EU/AU/US type power adapter depends on country to be used
- ✓ Packaging with environmental protection paper box

Dimension and weight:

- ✓ Device Size: 12 x 8.5 x 3 cm
- ✓ Device Weight: 150g
- ✓ Package Size / pcs : 21.5 x 10 x 5 cm
- ✓ Weight / pcs : 360g
- ✓ Carton dimension: 45 x 31 x 34 cm. 36pcs per carton
- ✓ Weight / carton : 12.5 kg

11. Support

- Try to see if your questions already answered in the [wiki](#).
- Support is provided Monday to Friday, from 09:00 to 18:00 GMT+8. Due to different timezones we cannot offer live support. However, your questions will be answered as soon as possible in the before-mentioned schedule.
- Provide as much information as possible regarding your enquiry (product models, accurately describe your problem and steps to replicate it etc) and send a mail to

support@dragino.com

12. Reference

- ✧ Source code for LG08 LoRa Gateway
https://github.com/dragino/openwrt_lede-18.06
- ✧ OpenWrt official Wiki
<http://www.openwrt.org/>
- ✧ Firmware
http://www.dragino.com/downloads/index.php?dir=LoRa_Gateway/LG308-OLG308/Firmware/
- ✧ Hardware Source code:
<https://github.com/dragino/motherboard-hardware/tree/master/LG308>