ADC_DelSig example project
2.10

Features

- Project uses Default Differential mode
- Continuous conversion mode with 16-bit resolution
- Reference used is internal reference

General Description

This example project demonstrates the operation of Delta Sigma ADC in differential mode.

Development kit configuration

1. This project is written with a 2X16 LCD display as the one available in the Cypress kit CY8CKIT-001.
2. Build the project and program the hex file on to CY8C3866AXI-040 using MiniProg3.
3. Connect pins as described below and power cycle the device.
4. Observe the ADC output on the LCD.

Project configuration

The example project consists of ADC_DelSig, VDAC and Char LCD components. The top design schematic is shown in Figure 1. The Character LCD component is used for displaying the ADC output. The VDAC component is used to supply analog input to the negative input of the ADC.

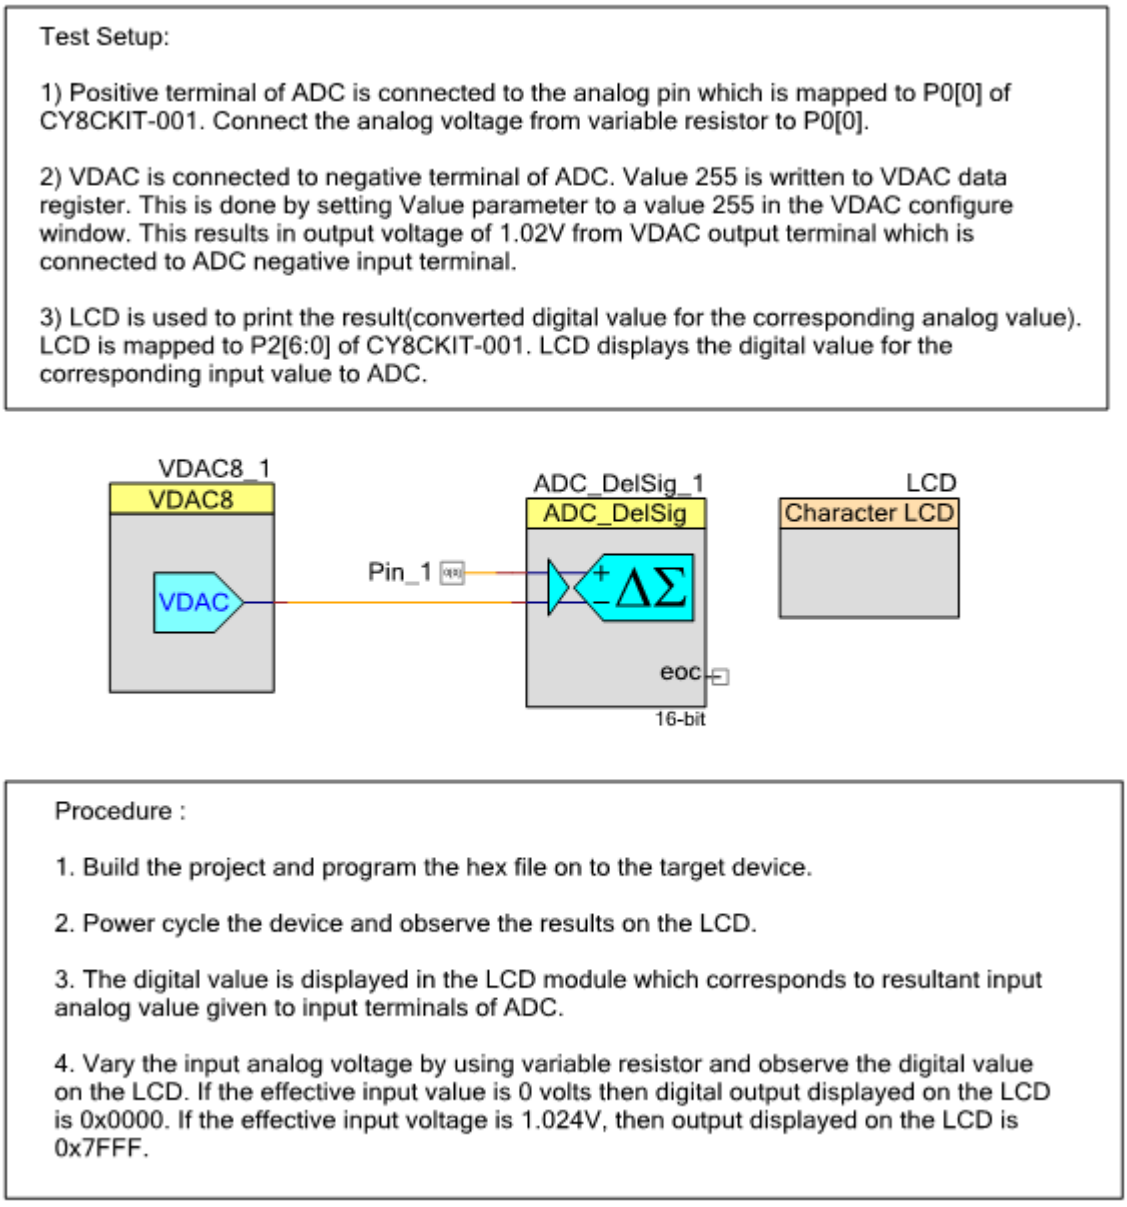

Figure 1. Top design schematic.

The Character LCD and VDAC use their default configurations. The ADC is configured in the default differential mode with 16-bit Continuous conversion mode. The ADC_DelSig component configuration window is shown below in figure 2.

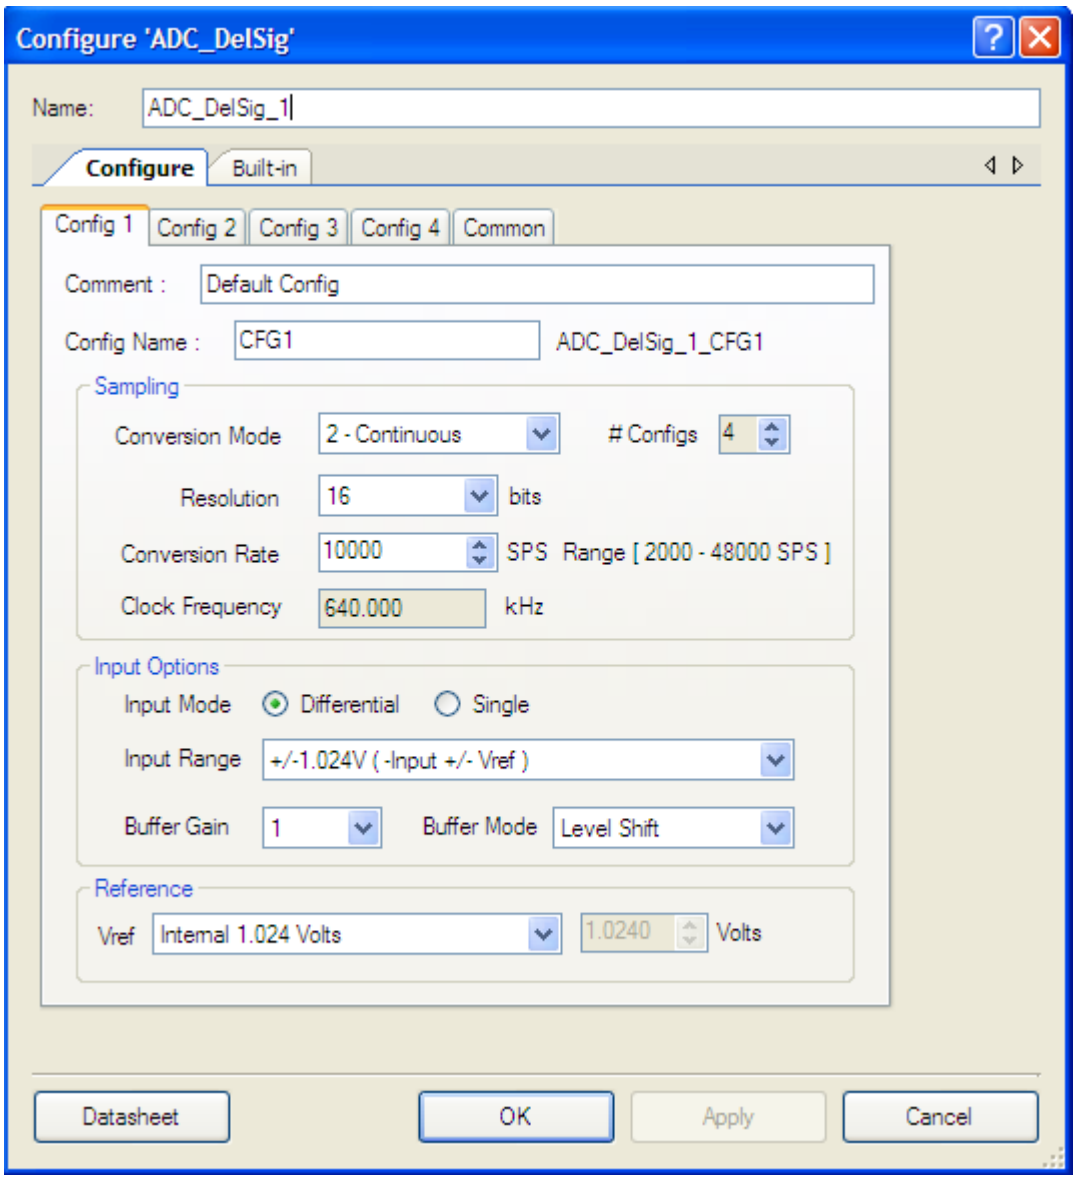

Figure 2. ADC_DelSig Component Configuration.

Project description

In the main function all components are started. For the proper usage of the Character LCD and VDAC components, please refer to the corresponding component datasheets.

ADC_DelSig is configured in the default differential mode. ADC_DelSig uses continuous conversion mode to convert the input analog voltage. ADC_DelSig_IsEndConversion() API is used to check the end of conversion. The converted digital value is read using ADC_DelSig_GetResult16() API and result is displayed on the LCD.

Expected Results

The LCD should display the converted output value which is equivalent to the effective analog input voltage given to the input terminals of ADC component.