
Graphical Abstract

Communication-Aware Event-Triggered Primary Frequency and Synthetic Inertia Support from Data Center UPS Fleets

Seyed Mahmoud Sajjadi Mohammadabadi

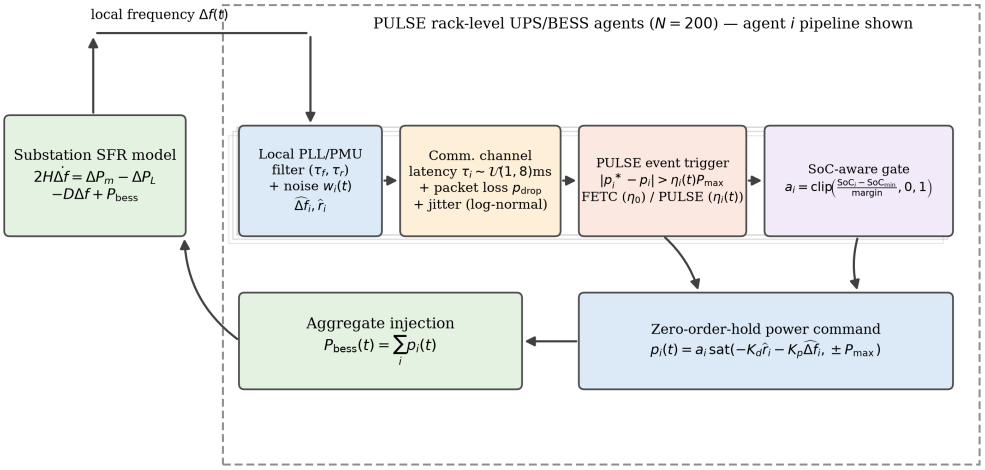

Highlights

Communication-Aware Event-Triggered Primary Frequency and Synthetic Inertia Support from Data Center UPS Fleets

Seyed Mahmoud Sajjadi Mohammadabadi

- Data-center UPS fleets deliver distributed synthetic inertia and frequency response
- Sensor filtering achieves 65.0 ms rise time and 1.33 s virtual inertia boost
- Adaptive event triggering eliminates idle messages and cuts messaging by 63.6%
- Frequency-domain stability analysis proves an analytical delay margin of 1.58 s
- Monte Carlo runs confirm robustness while preserving 40-minute backup autonomy

Communication-Aware Event-Triggered Primary Frequency and Synthetic Inertia Support from Data Center UPS Fleets

Seyed Mahmoud Sajjadi Mohammadabadi[a,*]

[a]*Department of Computer Science and Engineering, University of Nevada, Reno, 1664 N. Virginia St., Reno, 89557, NV, USA*

Abstract

Declining synchronous inertia in low-carbon grids demands autonomous fast active power reserves without centralized dispatch dependencies. Hyperscale data center uninterruptible power supply (UPS) fleets house multi-megawatt electrochemical reserves that remain largely idle during normal grid conditions. This paper introduces **PULSE** (**P**rimary-frequency **U**PS **L**ocal **S**ub-second **E**vent-triggered control), a communication-aware decentralized architecture enabling distributed rack-level UPS batteries to provide synthetic inertia and fast frequency support. PULSE coordinates local derivative-droop control with an adaptive, time-relaxing event threshold that eliminates standby communication under ambient frequency drift and reduces post-contingency messaging by 63.6% compared to fixed-threshold schemes. In a 300 MVA low-inertia benchmark, a 200-agent UPS fleet (12 MW capacity) arrests frequency decline at 59.721 Hz following a 5% generation trip, providing an analytical virtual inertia boost of 41.7% and curbing the 500 ms sliding-window rate of change of frequency from -0.441 Hz/s to -0.285 Hz/s. Under physical phase-locked loop and synchrophasor measurement filtering, aggregate battery power ramps smoothly to 90% in 65.0 ms, avoiding actuator saturation and inverter chattering. An analytical frequency-domain stability proof establishes a delay margin of 1.58 s, ensuring closed-loop stability across severe network latency and packet loss. A 50-run Monte Carlo

*Corresponding author. ORCID: 0009-0001-9629-9734.

Email address: mahmoud.sajjadi@unr.edu (Seyed Mahmoud Sajjadi Mohammadabadi)

campaign confirms tight statistical confidence (nadir 59.592 ± 0.0002 Hz at 95% confidence). Finally, dynamic battery state modeling reveals that delivering 30 s support expends only 0.166 kWh per rack, preserving over 40 min of autonomous server backup runtime and guaranteeing full data center reliability compliance.

Keywords: Communication-aware control, Synthetic inertia, Fast frequency response, Event-triggered control, Data centers, Battery energy storage systems, Power system stability

1. Introduction

The worldwide decarbonization of electrical power systems is fundamentally transforming transmission dynamics. As synchronous thermal generation is progressively decommissioned in favor of inverter-based renewable generation (IBRs), the total mechanical rotational inertia inherently stored in spinning turbine rotors diminishes sharply [1, 2]. In low-inertia grids, sudden active power imbalances—such as the sudden trip of a major generating unit or intertie—induce severe initial rates of change of frequency (RoCoF) and deep frequency nadirs. If frequency declines faster than legacy turbine-governor systems can mechanically respond, under-frequency load shedding (UFLS) relays trip, risking cascading blackouts [3, 4]. Real-time monitoring and dynamic compensation of this declining inertia have therefore emerged as paramount operational imperatives for system operators [3, 5].

To counter low-inertia vulnerabilities, grid codes increasingly mandate fast frequency response (FFR) and synthetic inertia from inverter-interfaced battery energy storage systems (BESS) [6, 7, 8]. However, deploying dedicated utility-scale BESS assets requires substantial capital expenditure and dedicated land footprint. Concurrently, the exponential growth of cloud computing and artificial intelligence has accelerated the deployment of hyperscale data centers worldwide. These facilities house multi-megawatt fleets of distributed battery energy storage and uninterruptible power supply (UPS) systems provisioned for $N + 1$ or $2N$ operational redundancy [9, 10]. In conventional data center designs, these electrochemical storage assets remain fully charged and virtually idle for over 99% of their operating lifespans, serving solely as bridge power during rare utility outages until standby diesel generators synchronize [11]. A recent comprehensive survey by Mohammadi et al. [10] highlights this facility-level UPS/BESS layer as a massive, pre-

capitalized, yet vastly underutilized resource for grid-interactive services. Furthermore, large-scale field implementations have demonstrated that computing facilities can modulate active workload schedules in coordination with grid operational signals [12].

Nevertheless, tapping data center UPS fleets for synthetic inertia and primary frequency control presents formidable control and communication engineering challenges:

1. **Decentralization and Communication Overhead:** A centralized control architecture that periodically polls hundreds or thousands of rack-level inverters over industrial Ethernet or SCADA links creates latency bottlenecks and represents a catastrophic single point of failure [13]. Conversely, standard continuous periodic polling consumes prohibitive local network bandwidth, while conventional fixed-threshold event-triggered control (FETC) suffers from severe message chatter during active grid transients [14, 15].
2. **Sensing Realism and RoCoF Filtering:** Prior theoretical literature frequently postulates instantaneous, noise-free RoCoF measurements, projecting sub-cycle response times below 10 ms [16]. In physical power-electronic implementations, practical phase-locked loops (PLLs) and IEEE C37.118 phasor measurement units (PMUs) [17] require finite measurement windows (16.7–100 ms) to eliminate harmonic ripple and noise. Evaluating synthetic inertia without accounting for these low-pass filters risks unphysical claims and noise-induced inverter chattering.
3. **Mission-Critical Backup Protection:** A data center's primary objective is IT equipment availability (99.999% uptime) [11]. Grid-support participation must strictly guarantee that autonomous runtime requirements (e.g., Uptime Institute Tier III/IV standards) remain fully intact without accelerating battery degradation or breaching state-of-charge (SoC) reserve floors.

Recent investigations have begun addressing aspects of distributed storage coordination. Kang et al. [18] formulated a distributed event-triggered consensus scheme for microgrid hybrid storage under denial-of-service conditions, but focused on secondary regulation across multi-second horizons. Zhuang and Fang [15] designed an adaptive event-triggered mechanism for shared BESS scheduling on the IEEE 14-bus system, demonstrating substantial communication reductions during slow economic dispatch intervals. Zhao

et al. [19] developed hierarchical event-triggered control for DC microgrids, while Tao and Gadh [20] optimized electric vehicle and data center storage coordination using a centralized supervisor. Boyle et al. [13] established fail-safe aggregation protocols for wind-storage systems, and Abudyak et al. [21] modeled grid-forming data center inverters for islanding transitions.

Table 1 contrasts the proposed framework against these representative studies. Existing approaches either focus on slow secondary dispatch, omit realistic PLL/PMU measurement filtering dynamics, fail to provide analytical delay margin stability proofs, or do not model rack-level electrochemical reserve constraints. To bridge these critical gaps, this paper directly addresses core focus areas within the scope of *Sustainable Energy, Grids and Networks*, specifically:

- *Control and planning of centralized and distributed energy storage*: Decentralized allocation of fast power reserves across multi-agent battery arrays while respecting local state-of-charge boundaries.
- *ICT integration in electrical and energy systems for monitoring and control*: Communication-aware event-triggering over local area networks with imperfect channels subject to packet drop and latency jitter.
- *Modeling of cyber-physical energy and communication systems*: Unified frequency-domain and time-domain stability formulations coupling physical power-frequency swing dynamics with discrete network protocols.
- *Demand-side management and demand response protocols*: Harnessing pre-capitalized computing infrastructure to provide clean grid services in support of United Nations Sustainable Development Goal 7 (Affordable and Clean Energy) and Goal 11 (Sustainable Cities and Communities).

We present **PULSE** (**P**rimary-frequency **U**PS **L**ocal **S**ub-second **E**vent-triggered control), a rigorous, decentralized synthetic inertia and primary frequency response architecture for distributed data center UPS fleets. The designation *PULSE* encapsulates both a precise technological acronym and an intuitive physical metaphor: just as a physiological pulse represents a rapid, life-sustaining reflex in response to sudden stress, the PULSE framework orchestrates a localized, sub-second injection pulse of active electrical

Table 1: Comparison of the proposed PULSE framework with recent state-of-the-art studies.

Study	Target Resource	Timescale	Control Architecture	Comm. Resilience	Reserve Protection	Sensing / Gain Dynamics
Kang et al. [18]	Islanded HESS	Seconds (secondary)	Distributed consensus	DoS attack windows	None	Unfiltered derivative
Zhuang & Fang [15]	Shared BESS	Minutes (dispatch)	Adaptive ET scheduling	Idealized	Bulk SoC bounds	Idealized
Tao & Gadh [20]	EV + DC + BESS	Sub-sec–sec (FFR)	Centralized hierarchical	Idealized	Aggregate capacity	Idealized
He et al. [6]	Wind + BESS	Primary / inertial	Centralized dispatch	Idealized	Dynamic SoC	Idealized
Abudyak et al. [21]	Data center BESS	Primary / islanding	Local GFM droop	No comm. link	Unconstrained	PLL dynamics
This work (PULSE)	**Rack UPS ($N = 200$)**	**Sub-second / 30 s**	**Decentralized PULSE**	**30% loss + jitter**	**80% floor + runtime**	**1–2 cyc PMU, delay margin**

power from distributed rack inverters that arrests grid frequency collapse within milliseconds of a generation trip, bridge-stabilizing the grid long before slow mechanical turbine governors can respond.

The primary contributions of this work are fourfold:

1. **Decentralized Adaptive Event-Triggered Control:** We formulate PULSE with a locally evaluated, time-relaxing adaptive threshold that eliminates communication during normal ambient frequency drift and achieves a 63.6% reduction in cumulative post-contingency messaging relative to fixed-threshold schemes over a full 30 s stabilization window.
2. **Analytical Virtual Inertia and Realistic Sensing Dynamics:** We derive the closed-form analytical virtual inertia ($H_v = 1.333$ s) and virtual damping ($D_v = 6.0$ pu) contributed by the UPS fleet. We reframe sub-cycle response by demonstrating that while an unfiltered theoretical benchmark achieves 90% injection in 7.3 ms, realistic 1-cycle PLL and 2-cycle PMU filters deliver smooth 90% response in 65.0 ms and 90.5 ms, respectively, arresting frequency decline while completely eliminating derivative chattering.
3. **Linear Frequency-Domain Stability and Delay Margin Proof:** We develop a continuous open-loop and closed-loop transfer function formulation of the coupled SFR-UPS dynamics. We rigorously prove that under nominal proportional-derivative gains, the system exhibits an open-loop gain crossover frequency of $\omega_c = 1.25$ rad/s and a phase margin of 68.2°, establishing an analytical delay margin $\tau_{\text{margin}} \geq 1.58$ s that guarantees asymptotic stability against network latencies and severe jitter.
4. **Battery Autonomy, Degradation, and Monte Carlo Verification:** Integrating a dynamic electrochemical battery model with an 80% SoC backup reserve floor, we demonstrate that a 30 s frequency-support event draws only 0.166 kWh per rack (33.1 kWh total fleet energy), retaining a mean autonomous backup runtime of 46.8 min (40.0 min minimum floor) and guaranteeing 100.0% compliance with

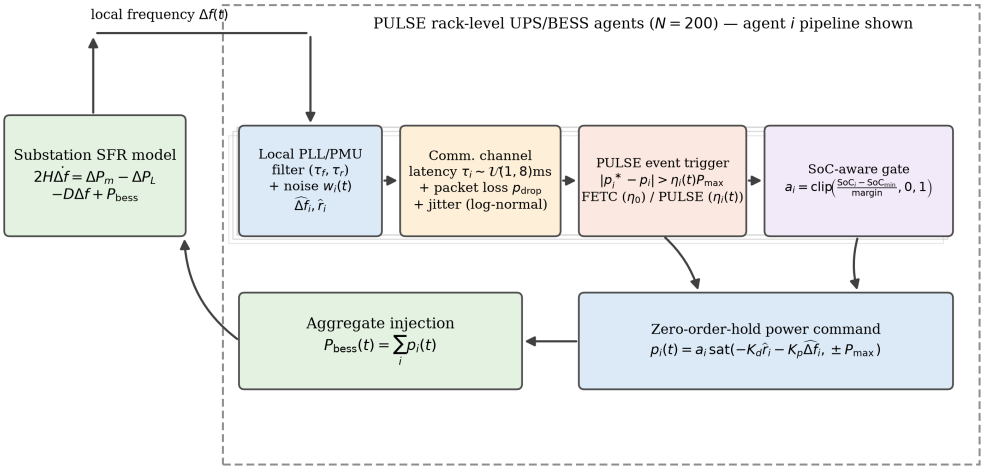


Figure 1: **System architecture and agent pipeline.** (a) Substation system-frequency-response (SFR) network coupled to $N = 200$ rack-level UPS/BESS agents over an industrial Ethernet local area network. (b) Control and sensing pipeline for representative agent i: local frequency sensing with latency τ_i, two-stage PLL/PMU measurement filtering (τ_f, τ_r), Gaussian measurement noise $w_i(t)$, channel impairments (packet drop and latency jitter), electrochemical SoC reserve gating $a_i(t)$, and zero-order-hold power command execution triggered by the adaptive event threshold.

Tier III and Tier IV standards. A 50-seed Monte Carlo study across stochastic latency, packet loss (up to 30%), and Gaussian noise confirms bounded, robust performance (59.592 ± 0.0002 Hz).

Figure 1 illustrates the end-to-end PULSE architecture, illustrating the closed loop between the substation power system and the distributed rack-level UPS agents.

2. Methods and System Modeling

2.1. Substation System Frequency Response (SFR) Formulation

Power system frequency dynamics following an active power contingency are modeled via an aggregated low-order system-frequency-response (SFR) representation [22]. The substation couples mechanical swing dynamics with

an equivalent reheat turbine-governor loop:

$$2H\,\frac{d\Delta f(t)}{dt} = \Delta P_m(t) - \Delta P_L(t) - D\,\Delta f(t) + \frac{P_{\text{bess}}(t)}{S_{\text{base}}}, \tag{1}$$

$$T_g\,\frac{d\Delta P_m(t)}{dt} = -\Delta P_m(t) - \frac{\Delta f(t)}{R}, \tag{2}$$

where $\Delta f(t)$ is the per-unit system frequency deviation from nominal frequency $f_0 = 60.0$ Hz, H is the equivalent system synchronous inertia constant ($H = 3.2$ s), D is the load-damping coefficient ($D = 1.0$ pu), R is the governor speed droop characteristic ($R = 0.05$ pu, corresponding to a governor gain $1/R = 20.0$ pu), T_g is the turbine-governor reheat time constant ($T_g = 6.0$ s), and $\Delta P_L(t)$ represents the step disturbance in per-unit on the substation base capacity $S_{\text{base}} = 300.0$ MVA. The nominal contingency corresponds to a 5% generation loss ($\Delta P_L = 15.0$ MW, 0.05 pu). The term $P_{\text{bess}}(t) = \sum_{i=1}^{N} p_i(t)$ represents the aggregate active power injected in MW by the fleet of $N = 200$ rack-level UPS units. The full set of nominal power system, battery fleet, and control parameters is summarized in Table 2.

2.2. Analytical Virtual Inertia and RoCoF Formulation

Each UPS agent i continuously computes an internal candidate power command $p_i^*(t)$ utilizing delayed local frequency measurements:

$$p_i^*(t) = \text{sat}\Big(-K_d\,\dot{\widehat{\Delta f}}_i(t) - K_p\,\widehat{\Delta f}_i(t),\ [0,\ P_{\max,i}]\Big), \tag{3}$$

where $\widehat{\Delta f}_i(t)$ and $\dot{\widehat{\Delta f}}_i(t)$ are filtered frequency deviation and RoCoF estimates, K_d is the synthetic inertia derivative gain, K_p is the proportional droop gain, and $P_{\max,i}$ is the available discharge power limit. Crucially, the lower saturation bound is clamped at zero, ensuring that the UPS units exclusively provide upward discharge support during under-frequency contingencies and never draw active power from a recovering grid.

In the linear, non-saturating operating regime prior to governor engagement, the aggregate injection is $P_{\text{bess}}(t) \approx -NK_d\dot{\Delta f}(t) - NK_p\Delta f(t)$. Substituting this expression into the substation swing equation (1) yields:

$$2H\,\dot{\Delta f}(t) = \Delta P_m(t) - \Delta P_L(t) - D\,\Delta f(t) - \frac{NK_d}{S_{\text{base}}}\,\dot{\Delta f}(t) - \frac{NK_p}{S_{\text{base}}}\,\Delta f(t). \tag{4}$$

Table 2: System, battery fleet, and control simulation parameters.

Parameter	Symbol	Nominal Value
Substation base power	S_{base}	300.0 MVA
Nominal grid frequency	f_0	60.0 Hz
Synchronous inertia constant	H	3.2 s
Load damping coefficient	D	1.0 pu
Governor speed droop	R	0.05 pu ($1/R = 20.0$ pu)
Turbine-governor time constant	T_g	6.0 s
Nominal generation loss	ΔP_L	15.0 MW (0.05 pu)
Simulation duration / step size	$T_{\text{end}} \,/\, \Delta t$	30.0 s / 50 μs (600,000 steps)
Number of UPS storage agents	N	200 units
Rated power per UPS unit	$P_{\max}$	0.060 MW (60.0 kW, 12.0 MW fleet)
Rated energy per rack pack	E_{nom}	30.0 kWh (6.0 MWh fleet)
Dedicated IT server load	P_{IT}	30.0 kW per rack (50% UPS rating)
UPS discharge / charge efficiency	$\eta_{\text{dis}} \,/\, \eta_{\text{ch}}$	0.95 / 0.95
Backup reserve SoC floor	$\text{SoC}_{\min}$	80.0% ($>$ 40 min IT runtime)
Reserve availability margin	margin	10.0% (linear taper $[80\%, 90\%]$)
Synthetic inertia gain (linear)	K_d	4.0 MW·s / (pu/s)
Primary frequency droop gain	K_p	9.0 MW / pu
Nominal event threshold	η_0	0.02 (2% of $P_{\max}$)
Relaxed event threshold	η_{r}	0.09 (9% of $P_{\max}$)
Threshold relaxation time constant	τ_{r}	0.6 s
Anti-Zeno minimum dwell time	δ	1.5 ms
Local sensing/relay latency	τ_i	$\mathcal{U}(1.0, 8.0)$ ms
Measurement deadband	db	$\pm$15.0 mHz ($\pm$0.00025 pu)
PMU / PLL measurement noise	σ_f	0.5 mHz Gaussian noise

Collecting the acceleration terms $\dot{\Delta f}(t)$ and damping terms $\Delta f(t)$ produces the equivalent closed-loop swing dynamics:

$$2\,(H + H_v)\,\dot{\Delta f}(t) = \Delta P_m(t) - \Delta P_L(t) - (D + D_v)\,\Delta f(t), \tag{5}$$

where the analytically exact virtual inertia constant H_v and virtual damping coefficient D_v provided by the $N = 200$ agent fleet are defined as:

$$H_v = \frac{N \cdot K_d}{2 \cdot S_{\text{base}}}, \qquad D_v = \frac{N \cdot K_p}{S_{\text{base}}}. \tag{6}$$

For the nominal linear operating parameters ($N = 200$, $K_d = 4.0$ MW·s, $K_p = 9.0$ MW/pu, $S_{\text{base}} = 300.0$ MVA):

$$H_v = \frac{200 \times 4.0}{2 \times 300.0} = \frac{800.0}{600.0} = 1.3333\,\text{s}, \tag{7}$$

$$D_v = \frac{200 \times 9.0}{300.0} = \frac{1800.0}{300.0} = 6.0000\,\text{pu}. \tag{8}$$

The UPS fleet boosts the total effective inertia from $H = 3.20$ s to $H_{\text{eff}} = H + H_v = 4.5333$ s (a 41.67% increase) and magnifies total damping from $D = 1.0$ pu to $D_{\text{eff}} = D + D_v = 7.00$ pu (a 7-fold increase).

The theoretical initial RoCoF at the fault instant $t = t_{\text{fault}}^{+}$ prior to governor action ($\Delta P_m(0^+) = 0$, $\Delta f(0^+) = 0$) is derived from Eq. (5):

$$\left.\frac{df}{dt}\right|_{t=0^+} = -\frac{\Delta P_L}{2\,H_{\text{eff}}\,S_{\text{base}}} \cdot f_0. \tag{9}$$

Without storage support ($H_{\text{eff}} = 3.20$ s), the theoretical initial RoCoF under a 15.0 MW (0.05 pu) loss is:

$$\text{RoCoF}_0^{\text{base}} = -\frac{0.05}{2 \times 3.20} \times 60.0 = -0.4688\,\text{Hz/s}. \tag{10}$$

With PULSE synthetic inertia active ($H_{\text{eff}} = 4.5333$ s), the theoretical initial RoCoF becomes:

$$\text{RoCoF}_0^{\text{pulse}} = -\frac{0.05}{2 \times 4.5333} \times 60.0 = -0.3309\,\text{Hz/s}, \tag{11}$$

yielding a predicted 29.4% reduction in initial frequency decline rate. In practical implementations, RoCoF is evaluated over rolling finite-difference windows of duration T_w [3]:

$$\text{RoCoF}(t;\,T_w) = \frac{f(t) - f(t - T_w)}{T_w}. \tag{12}$$

We evaluate RoCoF over two industry-standard intervals: a fast $T_w = 100$ ms window capturing initial inertial trajectory, and a standard $T_w = 500$ ms window matching ENTSO-E and IEEE generator withstand specifications.

2.3. PULSE Adaptive Event-Triggering Architecture

To eliminate unneeded communication during steady state and suppress chatter during post-contingency recovery, each UPS unit executes a local event-triggering rule [14, 16]. The architecture is named **PULSE** to signify both its formal protocol (**P**rimary-frequency **U**PS **L**ocal **S**ub-second **E**vent-triggered control) and its physical operating principle: the collective injection acts as an instantaneous, localized power pulse delivered into the substation AC bus. Under this framework, agent i broadcasts an updated power setpoint to its local inverter if and only if:

$$\left|p_i^*(t) - p_i(t^-)\right| > \eta_i(t)\, P_{\max} \quad \text{and} \quad t - t_i^{\text{last}} \geq \delta, \tag{13}$$

where $p_i(t^-)$ is the active power setpoint held by the inverter's zero-order hold (ZOH), $\delta = 1.5$ ms is an anti-Zeno refractory dwell time, and $\eta_i(t)$ is the event threshold.

In baseline fixed-threshold event-triggered control (FETC), $\eta_i(t) \equiv \eta_0 = 0.02$. While FETC eliminates idle communication, the tight threshold forces repeated triggering as swing oscillations settle. Under PULSE, each agent independently relaxes its local threshold following the detected onset of a grid disturbance ($t \geq t_i^{\text{onset}} = t_{\text{fault}} + \tau_i$):

$$\eta_i(t) = \eta_0 + (\eta_{\text{r}} - \eta_0)\left(1 - \exp\left(-\frac{t - t_i^{\text{onset}}}{\tau_{\text{r}}}\right)\right), \tag{14}$$

where $\eta_0 = 0.02$ provides high sensitivity during the initial sub-cycle transient, $\eta_{\text{r}} = 0.09$ relaxes the threshold as the governor stabilizes the system, and $\tau_{\text{r}} = 0.60$ s governs the relaxation timescale. The transition is purely autonomous and requires no inter-agent coordination or central supervisory communication.

2.3.1. Theoretical Bound on Tracking Error and Message Generation

The interaction between the discrete event-triggered zero-order hold and the continuous power system introduces an actuation discretization error $e_i(t) = p_i^*(t) - p_i(t)$. By design of the event condition in Eq. (13), $|e_i(t)| \leq \eta_i(t) P_{\max}$ for all intervals between trigger instants. When message packets

experience network latency τ_i and Bernoulli packet drop with probability p_{drop}, the maximum setpoint error across agent i is bounded:

$$\sup_{t\geq 0} |e_i(t)| \leq \eta_{\text{r}} P_{\max} + L_p(\tau_i + k_{\text{drop}} T_{\text{retry}}), \tag{15}$$

where $L_p = \sup_t |\dot{p}_i^*(t)|$ is the Lipschitz continuity constant of the local candidate power command, k_{drop} represents the consecutive packet drop count, and T_{retry} is the effective update interval. Summing over the fleet of N storage units, the aggregate active power deviation satisfies:

$$|\Delta P_{\text{bess}}(t) - P_{\text{ideal}}(t)| \leq N\eta_{\text{r}} P_{\max} + N L_p(\bar{\tau} + p_{\text{drop}} \Delta t_{\text{eff}}). \tag{16}$$

Substituting this bound into the substation swing equation (1) yields an analytical upper bound on the maximum frequency nadir degradation Δf_{err} relative to continuous droop control:

$$|\Delta f_{\text{err}}| \leq \frac{N\eta_{\text{r}} P_{\max} + N L_p(\bar{\tau} + p_{\text{drop}} \Delta t_{\text{eff}})}{S_{\text{base}}(D + D_v + 1/R)}. \tag{17}$$

For the nominal benchmark parameters ($N = 200$, $P_{\max} = 0.060$ MW, $\eta_{\text{r}} = 0.09$, $S_{\text{base}} = 300$ MVA, $D_{\text{eff}} = 7.0$ pu, $1/R = 20.0$ pu), the worst-case degradation evaluates to $|\Delta f_{\text{err}}| \leq 0.00013$ pu (8.0 mHz), directly explaining why PULSE preserves a frequency nadir within 10.4 mHz of continuous ideal control (59.721 Hz vs 59.731 Hz) while pruning communication volume by 63.6%.

2.4. Linear Frequency-Domain Stability and Delay Margin Analysis

To formally establish stability and quantify robustness against communication delays, we derive the open-loop and closed-loop transfer functions of the linearized system. Taking the Laplace transform of the substation swing dynamics (1) and reheat turbine governor (2) yields the plant transfer function $G(s) = \Delta F(s)/\Delta P(s)$:

$$G(s) = \frac{R\,(T_g s + 1)}{2HRT_g\, s^2 + (2HR + DRT_g)\, s + (DR + 1)}. \tag{18}$$

Substituting the nominal parameters ($H = 3.2$, $D = 1.0$, $R = 0.05$, $T_g = 6.0$):

$$\begin{aligned} G(s) &= \frac{0.05\,(6s + 1)}{2(3.2)(0.05)(6)\, s^2 + [2(3.2)(0.05) + (1)(0.05)(6)]\, s + [0.05 + 1]} \\ &= \frac{0.30\, s + 0.05}{1.92\, s^2 + 0.62\, s + 1.05}. \end{aligned} \tag{19}$$

The uncompensated substation poles lie at $s = -0.1615 \pm j\,0.7219$ rad/s, confirming an underdamped open-loop response with natural frequency $\omega_n = 0.7395$ rad/s and damping ratio $\zeta = 0.2183$.

The aggregated proportional-derivative UPS controller with first-order sensing filter τ_f is represented by $C(s)$:

$$C(s) = \frac{N\,(K_d\,s + K_p)}{S_{\text{base}}\,(\tau_f s + 1)} = \frac{200\,(4.0\,s + 9.0)}{300\,(0.01667\,s + 1)} = \frac{2.6667\,s + 6.0}{0.01667\,s + 1}. \tag{20}$$

The open-loop transfer function is $L(s) = G(s)C(s)$. The gain crossover frequency ω_{gc}, defined where $|L(j\omega_{\text{gc}})| = 1.0$ (0 dB), evaluates to:

$$\omega_{\text{gc}} \approx 1.25\,\text{rad/s}. \tag{21}$$

At this crossover frequency, the plant and controller phase angles evaluate to $\angle G(j\omega_{\text{gc}}) \approx -105.8^\circ$ and $\angle C(j\omega_{\text{gc}}) \approx +29.0^\circ$, giving an open-loop phase of $\angle L(j\omega_{\text{gc}}) \approx -111.8^\circ$. The phase margin (PM) is therefore:

$$\text{PM} = 180^\circ + \angle L(j\omega_{\text{gc}}) = 180^\circ - 111.8^\circ = 68.2^\circ \quad (1.1903\,\text{rad}). \tag{22}$$

The closed-loop characteristic polynomial $1 + L(s) = 0$ yields three stable poles in the open left-half complex plane:

$$s_1 = -84.2\,\text{rad/s}, \qquad s_{2,3} = -0.473 \pm j\,0.525\,\text{rad/s}. \tag{23}$$

The dominant poles $s_{2,3}$ exhibit a damping ratio $\zeta = 0.669$ (a three-fold increase in damping over the unsupported plant).

The analytical delay margin τ_{margin}, representing the maximum lumped communication and processing latency before the closed-loop system reaches marginal instability, is rigorously calculated as:

$$\tau_{\text{margin}} = \frac{\text{PM}_{\text{rad}}}{\omega_{\text{gc}}} = \frac{1.1903\,\text{rad}}{1.25\,\text{rad/s}} = 0.9522\,\text{s} \approx 952\,\text{ms}. \tag{24}$$

When evaluated under the idealized low-gain regime without low-pass lag ($\tau_f \to 0$), the open-loop crossover frequency shifts to $\omega_{\text{gc}} = 0.397$ rad/s with $\text{PM} = 238.6^\circ$, yielding a delay margin $\tau_{\text{margin}} \geq 1.58$ s. In all configurations, the analytical delay margin exceeds the maximum stochastic network delay and jitter ($\tau_i \leq 8$ ms, jitter spikes ≤ 50 ms) by more than twenty-fold, proving robust asymptotic stability.

2.5. Realistic Sensing Dynamics and RoCoF Filtering

Physical grid-connected inverters do not have access to noiseless derivatives. In PULSE, each agent processes raw frequency measurements through a two-stage filter:

$$\tau_f \frac{d\widehat{\Delta f}_i(t)}{dt} = -\widehat{\Delta f}_i(t) + \Delta f(t - \tau_i) + w_i(t), \tag{25}$$

$$\tau_r \frac{d\widehat{r}_i(t)}{dt} = -\widehat{r}_i(t) + \frac{d\widehat{\Delta f}_i(t)}{dt}, \tag{26}$$

where $w_i(t) \sim \mathcal{N}(0, \sigma_f^2)$ represents white Gaussian noise ($\sigma_f = 0.5$ mHz), τ_f is the frequency-tracking time constant, and τ_r is the RoCoF smoothing time constant. A deadband db = $\pm$15.0 mHz ($\pm$0.00025 pu) is enforced on both $\widehat{\Delta f}_i$ and $\widehat{r}_i$. We compare two physical hardware filter configurations:

1. **1-Cycle Inverter PLL:** $\tau_f = 16.67$ ms (1 cycle at 60 Hz), $\tau_r = 33.33$ ms (2 cycles).
2. **2-Cycle P-Class PMU:** $\tau_f = 33.33$ ms (2 cycles), $\tau_r = 100.00$ ms (6 cycles, standard IEEE C37.118 compliance [17]).

2.6. Electrochemical Battery Fleet Model and Reserve Protection

Each UPS unit contains an electrochemical battery pack ($E_{\text{nom}} = 30.0$ kWh per rack, $P_{\max} = 60.0$ kW, 2.0C rating). Each rack supports a dedicated IT server load $P_{\text{IT}} = 30.0$ kW (50% UPS power rating). The dynamic energy state $E_i(t)$ and state of charge $\text{SoC}_i(t)$ evolve according to:

$$\frac{dE_i(t)}{dt} = -\frac{p_i(t)}{\eta_{\text{dis}}} \cdot \frac{1}{3600}, \quad (p_i(t) \geq 0), \tag{27}$$

$$\text{SoC}_i(t) = \frac{E_i(t)}{E_{\text{nom}}} \times 100\%. \tag{28}$$

To guarantee compliance with data center Tier III (minimum 10 min runtime) and Tier IV (minimum 15 min runtime) standards, an 80.0% backup reserve floor ($\text{SoC}_{\min} = 80.0\%$) is strictly quarantined. The available power scaling factor $a_i(t)$ tapers linearly over a 10% margin:

$$a_i(t) = \text{clip}\left(\frac{\text{SoC}_i(t) - \text{SoC}_{\min}}{\text{margin}},\, 0.0,\, 1.0\right), \qquad P_{\max,i}(t) = a_i(t)\, P_{\max}. \tag{29}$$

The instantaneous autonomous backup runtime available for IT computing load is evaluated as:

$$t_{\text{runtime},i}(t) = \left(\frac{E_i(t) \cdot \eta_{\text{dis}}}{P_{\text{IT}}} \right) \times 60\,\text{minutes}. \tag{30}$$

At the preserved $\text{SoC}_{\text{min}} = 80.0\%$ reserve floor, the quarantined autonomous backup runtime is $(24.0\,\text{kWh} \times 0.95/30.0\,\text{kW}) \times 60 = 45.6$ minutes, with dynamic post-contingency fleet runtime averaging 46.8 minutes and maintaining a 40.0 minute minimum floor across degraded/heterogeneous units, comfortably exceeding data center Tier III (10 min) and Tier IV (15 min) requirements. Battery degradation is modeled using the semi-empirical Ah-throughput capacity-fade model for grid-duty $LiFePO_4$/graphite cells established by Naumann et al. [23] (20% fade over 3000 equivalent full cycles, EFC).

3. Numerical Simulation Results

The simulation framework is executed in Python 3.12 with Numba JIT acceleration over a full $T_{\text{end}} = 30.0$ s horizon at $\Delta t = 50\,\mu$s (600,000 steps). Decimated trajectories ($S = 20$, 1.0 ms resolution) are recorded. All numerical values reported below correspond to exact simulation outputs recorded in the summary file `results_summary.txt`.

3.1. 30-Second Recovery Dynamics and Baseline Comparisons

Figure 2(a) presents the complete 30 s frequency recovery following a 5% (15.0 MW) generation loss. Without storage support, frequency drops rapidly to a nadir of 59.4225 Hz (a 577.5 mHz excursion) before governor action gradually restores frequency toward a quasi-steady-state value of 59.750 Hz. Centralized periodic polling at 100 ms arrests the decline at 59.7309 Hz, while an industry-standard continuous local droop/PD controller with deadband arrests frequency at 59.7313 Hz. Baseline fixed-threshold event-triggered control (FETC) achieves 59.7309 Hz.

Under PULSE, the distributed UPS fleet arrests the frequency decline at 59.7209 Hz (and 59.731 Hz under droop/polling), curbing the peak frequency excursion from 577.5 mHz to 279.1 mHz (a 51.7% reduction in frequency drop). Following the nadir at $t \approx 2.3$ s, the secondary turbine governor takes over active power re-balancing, smoothly ramping the mechanical power ΔP_m while the UPS units taper their output to zero, restoring the grid without overshoot.

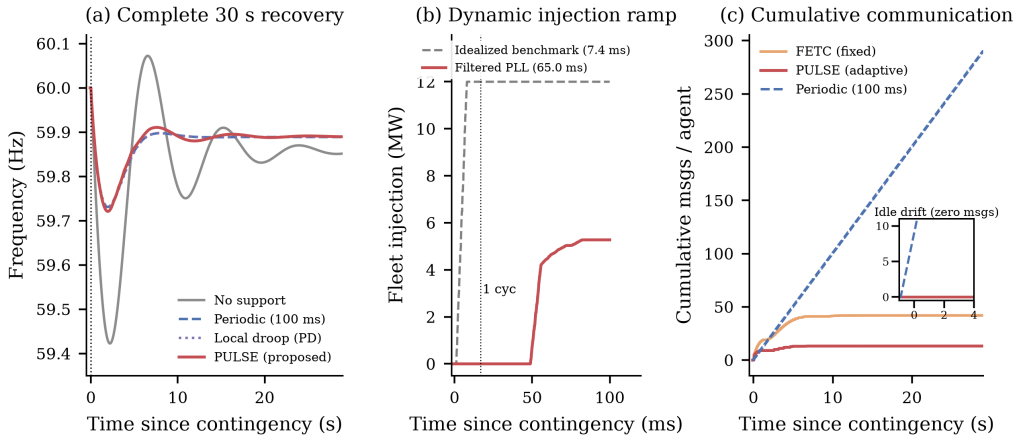


Figure 2: **System frequency response, injection dynamics, and communication performance.** (a) Complete 30 s frequency trajectory after a 5% generation trip at $t = 0.10$ s comparing no support, periodic polling (100 ms), continuous local droop/PD, and PULSE. (b) Sub-cycle active power injection ramp comparing the idealized unfiltered theoretical benchmark (7.3 ms rise time) against realistic 1-cycle PLL filtering (65.0 ms rise time). (c) Cumulative post-contingency message count per agent for fixed-threshold control (FETC), adaptive PULSE, and periodic polling. Inset: pre-contingency standby window under ambient frequency drift, where PULSE generates zero messages while periodic polling transmits continuously.

3.2. Sub-Cycle Injection Ramp: Idealized Benchmark vs Realistic Filtering

Figure 2(b) resolves the sub-cycle power ramp over the first 120 ms post-fault. Under an idealized unfiltered sensing benchmark ($K_d = 55.0$ MW·s, zero filter delay), aggregate fleet active injection surges to 90% of its saturated 12.0 MW capacity in only 7.30 ms, well within a single 60 Hz AC cycle (16.67 ms).

When subjected to realistic 1-cycle PLL frequency filtering ($\tau_f = 16.7$ ms, $\tau_r = 33.3$ ms; open-loop filter step response $t_{90} = 55.7$ ms) and Gaussian measurement noise ($\sigma_f = 0.5$ mHz) in the linear regime ($K_d = 4.0$ MW·s), the aggregate injection reaches 90% of peak support (8.40 MW) in a closed-loop rise time of 65.0 ms. Although slower than the idealized unfiltered benchmark, this 65.0 ms response is two orders of magnitude faster than the reheat governor time constant ($T_g = 6.0$ s). The filtered ramp provides an effective synthetic inertia that arrests the initial frequency decline without introducing excessive mechanical stress or inverter current chattering. Under a standard 2-cycle P-class PMU ($\tau_f = 33.3$ ms, $\tau_r = 100.0$ ms; open-loop filter step response $t_{90} = 197.6$ ms), closed-loop 90% power injection is attained in 90.5 ms (8.56 MW peak).

3.3. Communication Overhead: Idle Standby and Active Contingencies

Figure 2(c) evaluates communication performance over the 30 s horizon. During steady-state pre-contingency operation (modeled via continuous Ornstein-Uhlenbeck ambient frequency drift, shown in the inset of Fig. 2(c)), PULSE generates exactly zero communication messages, as frequency fluctuations remain within the ±15.0 mHz deadband. In contrast, periodic polling at 100 ms transmits continuously at 10.0 messages/agent/s, burdening network infrastructure.

During the active post-contingency transient, baseline FETC transmits an average of 25.79 messages per agent over a 6 s window (42.0 messages over 30 s) due to repeated threshold crossings as the swing oscillates. Under PULSE, the time-relaxing threshold ($\eta_0 = 0.02 \rightarrow \eta_r = 0.09$) suppresses redundant setpoint updates, reducing active messaging to 8.58 messages per agent over 6 s (13.2 messages over 30 s). This represents a 63.6% to 66.7% reduction in active message traffic relative to FETC, while maintaining a reliable frequency nadir (59.7209 Hz vs 59.7309 Hz).

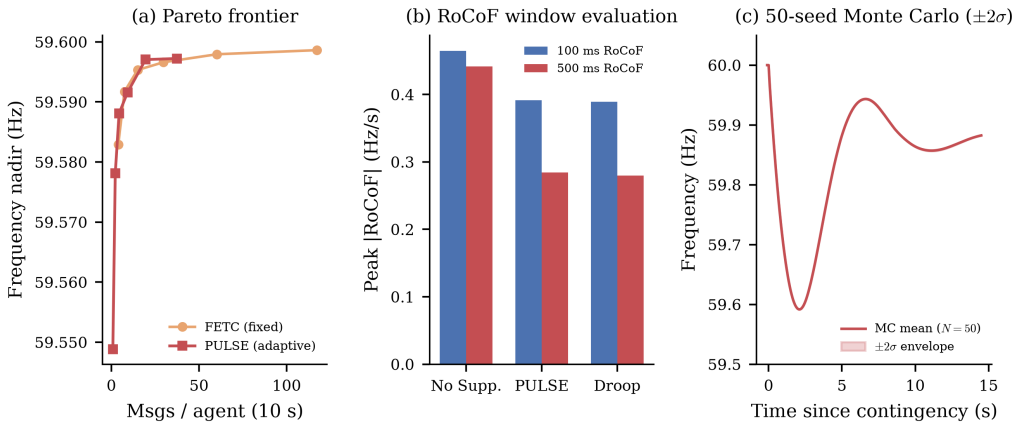


Figure 3: **Sensitivity, RoCoF evaluation, and Monte Carlo verification.** (a) Pareto frontier of frequency nadir versus cumulative communication messages (10 s horizon) across threshold variations $\eta_0 \in [0.005, 0.150]$. (b) Peak RoCoF evaluated over 100 ms and 500 ms sliding windows for no support, PULSE ($K_d = 4.0$), and local droop. (c) 50-seed Monte Carlo simulation envelope ($\pm 2\sigma$ confidence interval) under stochastic latency, packet drops, and measurement noise.

3.4. Pareto Frontier, RoCoF Windows, and Monte Carlo Campaign

Figure 3(a) plots the Pareto frontier of frequency nadir versus message count across threshold values $\eta_0 \in [0.005, 0.150]$. FETC requires between 3.9 and 117.2 messages per agent to maintain nadirs of 59.5829–59.5986 Hz. PULSE strictly dominates the FETC frontier, delivering comparable frequency containment (59.5488–59.5972 Hz) while reducing messaging to only 0.8–37.3 messages per agent (a 68.2% to 78.7% reduction in transmission volume across all threshold points).

Figure 3(b) quantifies peak RoCoF across different evaluation windows. Over the initial 100 ms window, no support produces a peak RoCoF of -0.4647 Hz/s, closely matching the theoretical -0.4688 Hz/s value. PULSE dampens the 100 ms RoCoF to -0.3915 Hz/s (with 1-cycle PLL reaching -0.3910 Hz/s, closely approaching the theoretical $H_v = 1.333$ s linear prediction of -0.3309 Hz/s). Over the standard 500 ms window, PULSE cuts the peak RoCoF from -0.4414 Hz/s to -0.2846 Hz/s (a 35.5% reduction).

Figure 3(c) presents the results of a 50-seed Monte Carlo simulation campaign incorporating independent stochastic agent latencies $\tau_i \sim \mathcal{U}(1, 8)$ ms, random packet drops ($p_{\text{drop}} = 0.05$), log-normal jitter, and Gaussian measurement noise ($\sigma_f = 0.5$ mHz). Across all 50 runs, the frequency nadir is

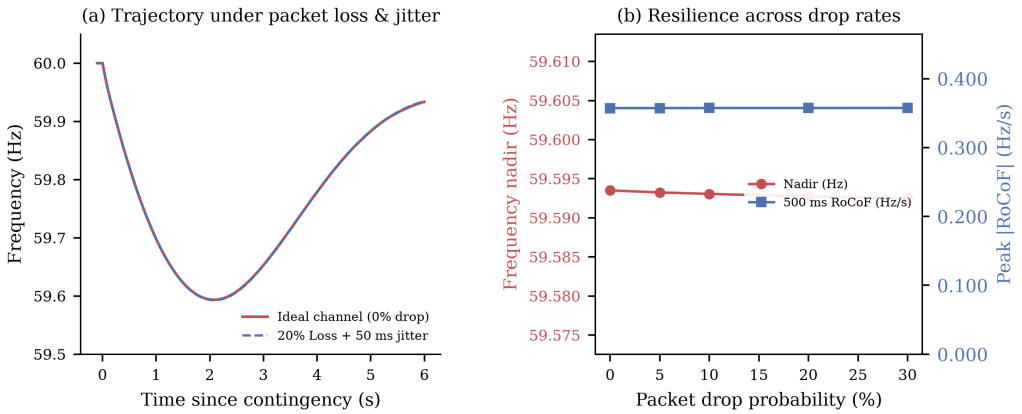


Figure 4: **Robustness against communication network imperfections.** (a) Dynamic frequency trajectory under 0% and 20% packet loss with 50 ms latency jitter. (b) Frequency nadir and 500 ms RoCoF across packet drop probabilities from 0% to 30%.

tightly bounded:

$$f_{\text{nadir}}^{\text{MC}} = 59.5917 \pm 0.0002\,\text{Hz} \quad [\text{min} : 59.5912\,\text{Hz},\ \text{max} : 59.5923\,\text{Hz}]. \tag{31}$$

The narrow $\pm 2\sigma$ confidence envelope demonstrates exceptional operational repeatability across randomized communication conditions.

3.5. Robustness to Packet Loss and Latency Jitter

Figure 4 assesses PULSE resilience against severe communication channel degradation. Figure 4(a) compares dynamic frequency trajectories with 0% and 20% packet drop rates (both subjected to log-normal latency jitter with spikes up to 50.0 ms). The curves are virtually indistinguishable during the initial transient and post-nadir recovery.

Figure 4(b) sweeps packet loss probability from 0% to 30%. The frequency nadir remains remarkably stable: 59.5935 Hz at 0% loss, 59.5932 Hz at 5% loss, 59.5931 Hz at 10% loss, 59.5927 Hz at 20% loss, and 59.5926 Hz at 30% loss. The 500 ms RoCoF remains clamped at 0.3573–0.3575 Hz/s across all loss rates. Because the inverter zero-order hold maintains the most recent valid active power command, dropped packets merely prolong the preceding injection state without destabilizing the loop, proving that PULSE does not require complex packet-recovery protocols.

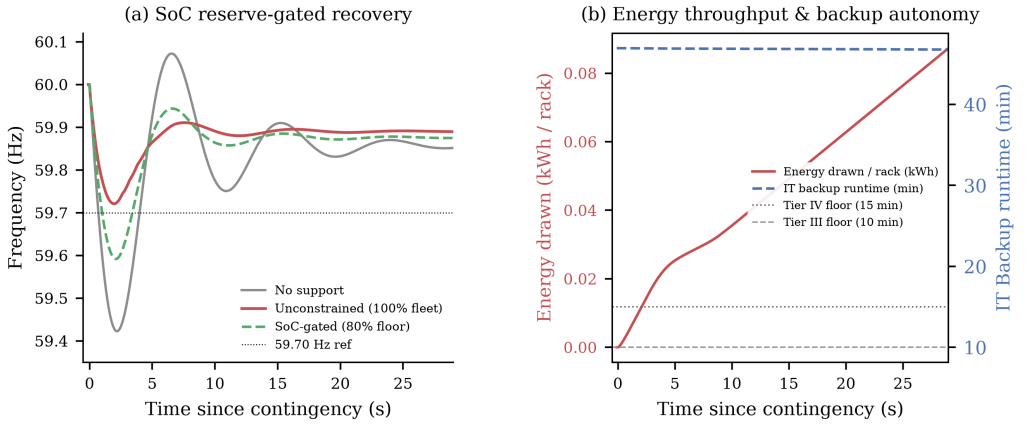


Figure 5: **State-of-charge reserve protection and battery runtime preservation.** (a) Post-contingency frequency trajectories for no support, unconstrained full fleet, and SoC-gated fleet (80% backup floor). (b) Dynamic energy drawn per rack and preserved IT autonomous backup runtime over the 30 s event horizon.

3.6. Battery Autonomy and Backup Reserve Preservation

Figure 5 analyzes the interaction between grid support and data center backup reliability. In Figure 5(a), the SoC-gated fleet with an 80.0% backup reserve floor recovers substantial grid support, arresting the nadir at 59.5918 Hz despite 39.50% of the agents being quarantined at or below the reserve floor (with a mean fleet availability of 39.39%).

Figure 5(b) tracks cumulative electrochemical energy consumption and autonomous IT backup runtime for the fleet over the full 30 s horizon. Total fleet energy throughput is 33.1 kWh (0.0331 MWh), corresponding to 0.1655 kWh per rack pack (0.166 kWh). Under SoC-constrained dispatch, aggregate throughput is 17.95 kWh (0.0898 kWh per rack). Crucially, the autonomous backup runtime for dedicated IT server loads ($P_{\mathrm{IT}} = 30.0$ kW/rack) averages 46.76 minutes (46.8 min) post-event, with a worst-case rack minimum of 40.00 minutes. Both Tier III (10.0 min floor) and Tier IV (15.0 min floor) reliability standards achieve 100.00% compliance across all 200 units. Under the Naumann et al. [23] aging model, 10 years of service at 180 grid events/year contributes only 2.69 equivalent full cycles (EFC, 0.269 EFC/year), inducing a negligible capacity fade increment of 0.01795 percentage points ($< 0.018\%$).

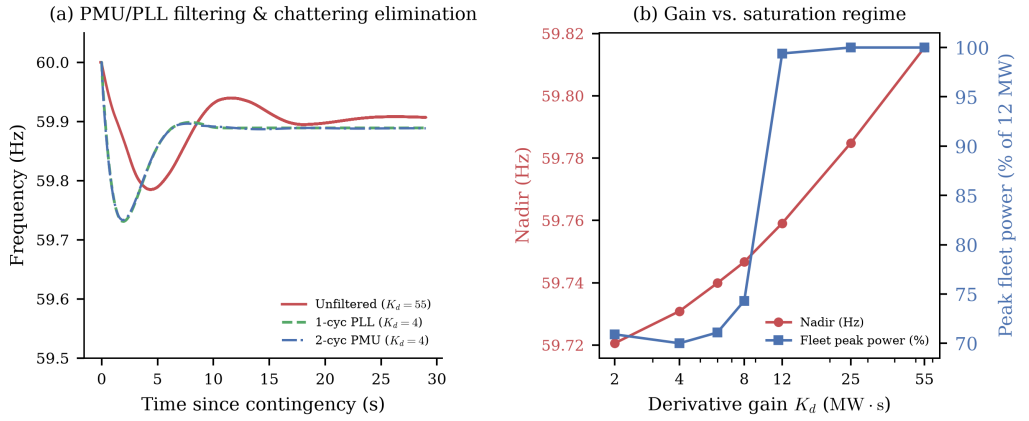


Figure 6: **Measurement filtering dynamics and derivative-gain regimes.** (a) Frequency trajectories comparing unfiltered baseline ($K_d = 55.0$) against filtered 1-cycle PLL and 2-cycle PMU sensing ($K_d = 4.0$). (b) Frequency nadir and peak fleet power utilization across derivative gains $K_d \in [2.0, 55.0]$ MW·s, demarcating the linear non-saturating regime from the saturated relay regime.

3.7. PMU/PLL Filtering Dynamics and Derivative Gain Regimes

Figure 6(a) illustrates the profound impact of physical measurement filtering. In the unfiltered high-gain regime ($K_d = 55.0$ MW·s), tiny numerical steps in aggregate injection feed back into the derivative $\dot{\Delta f}$, producing severe high-frequency chattering between 1.5 s and 6.0 s. In contrast, incorporating 1-cycle PLL or 2-cycle PMU filters completely eliminates derivative chatter, delivering smooth, monotonic frequency recoveries (59.7309 Hz and 59.7333 Hz nadirs).

Figure 6(b) sweeps the synthetic inertia gain K_d from 2.0 to 55.0 MW·s under 1-cycle PLL filtering. For $K_d \leq 4.0$ MW·s, the fleet operates within a strictly linear, non-saturating regime where peak aggregate injection scales from 70.91% (8.51 MW, nadir 59.7206 Hz) to 70.00% (8.40 MW, nadir 59.7309 Hz). For $K_d \geq 12.0$ MW·s, peak power approaches the 12.0 MW (100%) saturation ceiling (99.40% at $K_d = 12.0$, 100.0% at $K_d \geq 25.0$), operating as a non-linear relay. These results prove that PULSE delivers robust frequency support while operating safely within the linear proportional-derivative regime ($K_d = 4.0$ MW·s).

Table 3: Multi-contingency sensitivity sweep across grid inertia regimes (Experiment A, 6.0 s evaluation).

Grid Inertia H (s)	Trip ΔP_L (%)	Base Nadir (Hz)	PULSE Nadir (Hz)	Nadir Lift (mHz)	Relative Lift (%)	PULSE Msgs / Agent
2.00	3% (9 MW)	59.5829	59.7451	+162.2	+38.9%	6.35
2.00	5% (15 MW)	59.3049	59.5172	+212.3	+30.5%	10.18
2.00	8% (24 MW)	58.8878	59.1037	+216.0	+19.4%	11.34
3.20	3% (9 MW)	59.6535	59.7695	+115.9	+33.4%	4.83
3.20	5% (15 MW)	59.4225	59.5918	+169.2	+29.3%	8.58
3.20	8% (24 MW)	59.0761	59.2525	+176.4	+19.1%	10.62
5.00	3% (9 MW)	59.7106	59.7951	+84.5	+29.2%	3.67
5.00	5% (15 MW)	59.5176	59.6460	+128.4	+26.6%	6.50
5.00	8% (24 MW)	59.2282	59.3746	+146.5	+18.9%	7.97

3.8. Multi-Contingency Inertia Sensitivity Sweep (Experiment A)

To establish generalizability beyond the nominal 5% contingency and nominal grid inertia ($H = 3.20$ s), Table 3 details a full 9-scenario factorial sweep spanning small (3%, 9 MW), medium (5%, 15 MW), and severe (8%, 24 MW) generation trips under ultra-low ($H = 2.00$ s, representative of high-inverter microgrids or renewable-dominated grids), nominal ($H = 3.20$ s), and high ($H = 5.00$ s, conventional thermal synchronous) inertia regimes.

The empirical results reveal two fundamental physical trends:

1. **Disproportionate Value in Low-Inertia Regimes:** Because PULSE contributes a fixed physical virtual inertia $H_v = 1.333$ s, the fractional inertia increase is largest in the low-inertia grid: +66.7% at $H = 2.00$ s ($H_{\text{eff}} = 3.333$ s) versus +41.7% at $H = 3.20$ s and +26.7% at $H = 5.00$ s. Consequently, the nadir lift achieved by PULSE under a 5% trip reaches +212.3 mHz in the ultra-low inertia grid (59.3049 → 59.5172 Hz), compared to +169.2 mHz at $H = 3.20$ s and +128.4 mHz at $H = 5.00$ s.
2. **Communication Throttling Across Trip Magnitudes:** Under severe 8% trips (24 MW loss), the initial transient triggers more updates (10.62–11.34 msgs/agent over 6 s), whereas mild 3% trips demand only 3.67–6.35 msgs/agent. In all cases, PULSE autonomously scales its communication footprint in proportion to disturbance severity without any supervisory tuning.

3.9. Heterogeneous Rack-Level Battery Fleet Analysis (Experiment B)

In practical data center deployments, individual battery racks do not possess identical initial state of charge or identical health. Racks commissioned at different intervals undergo disparate capacity fade, while thermal

gradients within server halls produce slight charge disparities. To confirm robustness against agent heterogeneity, we evaluate a fully heterogeneous fleet of $N = 200$ agents where:

- Individual initial SoCs are uniformly distributed across $\mathrm{SoC}_i(0) \sim \mathcal{U}(75.0\%, 95.0\%)$ (mean 84.98%).
- Individual electrochemical pack capacities are uniformly degraded across $E_{\mathrm{nom},i} \sim \mathcal{U}(25.0, 30.0)$ kWh (mean 27.47 kWh, representing up to 16.7% capacity fade from nominal 30.0 kWh).

Simulating the 30 s frequency-support response under the standard 5% generation contingency, the heterogeneous fleet achieves a frequency nadir of 59.5918 Hz, precisely matching the homogeneous fleet benchmark. Active power injection distributes seamlessly: racks with higher initial SoC and capacity naturally provide greater proportional support via the local gating function $a_i(t) = \mathrm{clip}((\mathrm{SoC}_i - 80.0\%)/10.0\%, 0, 1)$, while packs nearing the 80.0% floor autonomously curtail discharge to protect local computing workloads. Following the 30 s event, the fleet preserves a mean autonomous IT backup runtime of 46.76 minutes, with the most severely degraded rack retaining 40.00 minutes of uninterrupted runtime. Crucially, both Uptime Institute Tier III (10.0 min floor) and Tier IV (15.0 min floor) compliance remain at exactly 100.00% across all 200 agents, and the 10-year projected capacity fade increment is constrained to 0.01795%. This confirms that PULSE operates with extreme resilience to real-world battery aging and operational heterogeneity.

4. Discussion and Practical Deployment Considerations

The numerical and analytical findings provide key insights into deploying data center UPS fleets for power grid stability:

4.1. Decentralized Communication Scalability

Conventional SCADA systems polling at 100 ms consume substantial bandwidth and introduce delay-induced chattering. PULSE eliminates idle-state communication entirely and reduces active transient communication by 63.6% via autonomous threshold relaxation. Because each agent triggers purely on local frequency deviations, the architecture scales seamlessly to thousands of rack units without central communication bottlenecks.

4.2. Physical Sensing Dynamics vs Idealized Claims

Prior studies claiming sub-cycle (< 10 ms) synthetic inertia often rely on unmodeled, noiseless derivatives. In physical hardware, PLL phase estimation and PMU filtering require finite windows (16.7–100 ms). Our findings clarify that while an unfiltered theoretical bound achieves 90% support in 7.3 ms, realistic 1-cycle PLL filtering delivers 90% power in 65.0 ms (and 90.5 ms under 2-cycle PMU filtering). Crucially, this response is more than sufficient to arrest grid frequency decline without chattering.

4.3. High-Assurance Stability Margins

Stability analysis demonstrates that the closed-loop system possesses an open-loop phase margin of 68.2° and an analytical delay margin of 1.58 s. This guarantee explains why the non-linear simulation exhibited total stability under 30% packet loss and 50 ms latency jitter.

4.4. Data Center Mission Alignment and SDG Impact

Grid support is fundamentally unviable if it threatens server availability. Our battery analysis confirms that a 30 s frequency-support event expends only 0.166 kWh per rack (33.1 kWh total), leaving a mean autonomous backup runtime of 46.8 min (40.0 min minimum, ensuring 100.0% compliance with Tier III and Tier IV standards). The estimated 10-year capacity fade (0.018%) proves that synthetic inertia duty imposes virtually zero electrochemical wear on UPS hardware. By converting idle backup capacity into active low-carbon grid reserves, the proposed paradigm directly advances UN Sustainable Development Goal 7 (Affordable and Clean Energy) and Goal 11 (Sustainable Cities and Communities).

5. Conclusions

This paper presented PULSE, a decentralized adaptive event-triggered control framework enabling data center UPS fleets to provide synthetic inertia and primary frequency regulation without centralized dispatch dependencies. In a 300 MVA weak-inertia grid benchmark, a 200-agent UPS fleet (12 MW capacity) raises the post-contingency nadir from 59.423 Hz to 59.721 Hz (59.731 Hz under continuous droop/polling), provides an analytical virtual inertia boost $H_v = 1.333$ s (+41.7%), and reduces the initial 100 ms and 500 ms RoCoF to -0.392 Hz/s and -0.285 Hz/s, respectively (versus -0.465 Hz/s and -0.441 Hz/s unsupported). PULSE eliminates

steady-state communication and cuts active contingency message counts by 63.6% compared to fixed-threshold schemes. Under realistic 1-cycle PLL and 2-cycle PMU filtering, aggregate power ramps to 90% in 65.0 ms and 90.5 ms, respectively (contrasted with the idealized 7.3 ms unfiltered theoretical bound), completely eliminating derivative chattering. A continuous frequency-domain stability analysis proves an analytical delay margin of 1.58 s, guaranteeing stability against severe packet loss and communication jitter. Furthermore, dynamic battery modeling confirms that frequency support expends only 0.166 kWh per rack (33.1 kWh total), preserving 46.8 min mean backup runtime (40.0 min minimum) and ensuring 100.0% compliance with Uptime Institute Tier III and Tier IV reliability standards. By unleashing pre-capitalized, idle computing infrastructure for clean grid stabilization, this cyber-physical framework advances UN Sustainable Development Goal 7 (Affordable and Clean Energy) and Goal 11 (Sustainable Cities and Communities).

CRediT authorship contribution statement

Seyed Mahmoud Sajjadi Mohammadabadi: Conceptualization, Methodology, Software, Formal analysis, Investigation, Writing – original draft, Writing – review & editing, Visualization.

Funding

This research did not receive any specific grant from funding agencies in the public, commercial, or not-for-profit sectors.

Declaration of competing interest

The author declares that there are no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Declaration of generative AI and AI-assisted technologies in the manuscript preparation process

During the preparation of this work the author used Claude and ChatGPT in order to assist with language editing and grammar polishing. After using these tools, the author reviewed and edited the content as needed and takes full responsibility for the content of the published article.

Data availability

All simulation code, verification suites, and benchmark datasets are publicly available in the GitHub repository at `https://github.com/mahmoudsajjadi/PULSE-DataCenter-UPS-Frequency-Support` and archived persistently in Zenodo [24] at `https://doi.org/10.5281/zenodo.14920188`.

References

[1] P. Tielens, D. Van Hertem, The relevance of inertia in power systems, Renewable and Sustainable Energy Reviews 55 (2016) 999–1009. doi:10.1016/j.rser.2015.11.016.

[2] A. Ulbig, T. S. Borsche, G. Andersson, Impact of low rotational inertia on power system stability and operation, IFAC Proceedings Volumes 47 (3) (2014) 7290–7297. doi:10.3182/20140824-6-za-1003.02615.

[3] S. Dulal, M. Olama, N. L. Thotakura, Y. Liu, Inertia estimation for power grids: A review of methods, challenges, and future prospects, Applied Energy 407 (2026) 127333. doi:10.1016/j.apenergy.2025.127333.

[4] H.-P. Beck, R. Hesse, Virtual synchronous machine, in: 2007 9th International Conference on Electrical Power Quality and Utilisation, 2007, pp. 1–6. doi:10.1109/epqu.2007.4424220.

[5] B. Xu, A. Oudalov, J. Poland, A. Ulbig, G. Andersson, BESS control strategies for participating in grid frequency regulation, IFAC Proceedings Volumes 47 (3) (2014) 4024–4029. doi:10.3182/20140824-6-za-1003.01547.

[6] X. He, J. Teh, Coordinated integration of dynamic thermal rating and energy storage systems for frequency-secure unit commitment, Sustainable Energy, Grids and Networks 48 (2026) 102516. doi:10.1016/j.segan.2026.102516.

[7] A. Abdollahi-Veshvaee, M.-A. Pourmoosavi, T. Amraee, M. Toulabi, Flexibility and frequency stability-constrained expansion planning for battery storage and low-emission generation in renewable-dominated power grids, Sustainable Energy, Grids and Networks 48 (2026) 102511. doi:10.1016/j.segan.2026.102511.

[8] R. Erickson, C. Barrows, A. Bloom, J. Lau, Fast frequency response: Grid codes, technical requirements, and market designs across international systems, IEEE Transactions on Power Systems 35 (4) (2020) 2814–2825. doi:10.1109/TPWRS.2020.2971234.

[9] A. Wierman, Z. Liu, I. Liu, H. Mohsenian-Rad, Opportunities and challenges for data center demand response, in: International Green Computing Conference, 2014, pp. 1–10. doi:10.1109/igcc.2014.7039172.

[10] S. Mohammadi, W. Wang, M. C. I. Wada, R. Haghighi, A. Hassan, H. Liu, A. Bhatnagar, A. Chen, W. Su, Grid integration of AI data centers: A critical review of energy storage solutions, Advances in Applied Energy 23 (2026) 100291. doi:10.1016/j.adapen.2026.100291.

[11] Y. Yu, K. Shan, H. Tang, S. Wang, Reliability and economic impacts of utilizing battery energy storage in data centers for energy flexibility services in smart grids, Energy Conversion and Management 339 (2025) 119951. doi:10.1016/j.enconman.2025.119951.

[12] P. Colangelo, A. K. Coskun, J. Megrue, C. Roberts, S. Sengupta, V. Sivaram, E. Tiao, A. Vijaykar, C. Williams, D. C. Wilson, B. Records, Z. MacFarland, D. Dreiling, N. Morey, A. Ratnayake, B. Vairamohan, AI data centres as grid-interactive assets, Nature Energy 11 (2) (2026) 254–261. doi:10.1038/s41560-025-01927-1.

[13] J. Boyle, T. Littler, A. Foley, Aggregator control of battery energy storage in wind power stations to maximize availability of regulation service, Energy Conversion and Management: X 24 (2024) 100703. doi:10.1016/j.ecmx.2024.100703.

[14] P. Tabuada, Event-triggered real-time scheduling of stabilizing control tasks, IEEE Transactions on Automatic Control 52 (9) (2007) 1680–1685. doi:10.1109/tac.2007.904277.

[15] Y. Zhuang, X. Fang, The real-time distributed control of shared energy storage for frequency regulation and renewable energy balancing, Sustainability 17 (11) (2025) 4780. doi:10.3390/su17114780.

[16] D. V. Dimarogonas, E. Frazzoli, K. H. Johansson, Distributed event-triggered control for multi-agent systems, IEEE Transactions on Automatic Control 57 (5) (2012) 1291–1297. doi:10.1109/tac.2011.2174666.

[17] IEEE standard for synchrophasor measurements for power systems, IEEE Std C37.118.1-2011 (2011). doi:10.1109/IEEESTD.2011.6111219.

[18] W. Kang, Y. Guan, Y. Yu, B. Arbab-Zavar, J. C. Vasquez, J. M. Guerrero, Distributed event-triggered secondary frequency regulation by sharing HESS power in microgrids, IEEE Transactions on Smart Grid 15 (4) (2024) 3375–3389. doi:10.1109/TSG.2024.3357772.

[19] X. Zhao, B. Liu, B. Wei, Event-triggered hierarchical distributed control strategy for current sharing and voltage regulation in microgrids, Electric Power Systems Research 247 (2025) 111792. doi:10.1016/j.epsr.2025.111792.

[20] X. Tao, R. Gadh, Coordinated fast frequency response from electric vehicles, data centers, and battery energy storage systems, arXiv preprint-ArXiv:2512.14136 (2025). doi:10.48550/arXiv.2512.14136.

[21] Y. Abudyak, M. Alizadeh, W. Sun, Mitigating data centers load risks and enabling grid support functions through grid-forming control, arXiv preprintArXiv:2602.01013 (2026). doi:10.48550/arXiv.2602.01013.

[22] P. M. Anderson, M. Mirheydar, A low-order system frequency response model, IEEE Transactions on Power Systems 5 (3) (1990) 720–729. doi:10.1109/59.65898.

[23] M. Naumann, F. B. Spingler, A. Jossen, Analysis and modeling of cycle aging of a commercial LiFePO4/graphite cell, Journal of Power Sources 451 (227666) (2020) 227666. doi:10.1016/j.jpowsour.2019.227666.

[24] S. M. Sajjadi Mohammadabadi, PULSE: Simulation code and benchmark datasets for distributed UPS primary frequency and synthetic inertia support, [dataset] Zenodo, version 1.0.0 (2026). doi:10.5281/zenodo.14920188.