Type text to search here...

Home > Access-list Quiz

Access-list Quiz

Go to comments

Result of Access-list Quiz:

Total Questions	Full Score	Passing Rate	Your Score	Correct Answer Percentage	Elapsed
7	100	80%	100	100%	00:01:18

Congratulations!


You passed this test!

If you want to retake this quiz, please press Ctrl + F5 on Windows or press CMD + R on Mac.

Your answers are shown below:

Question 1

Refer to the exhibit. A network engineer must block access for all computers on VLAN 20 to the web server via HTTP. All other computers must be able to access the web server. Which configuration when applied to switch A accomplishes this task?

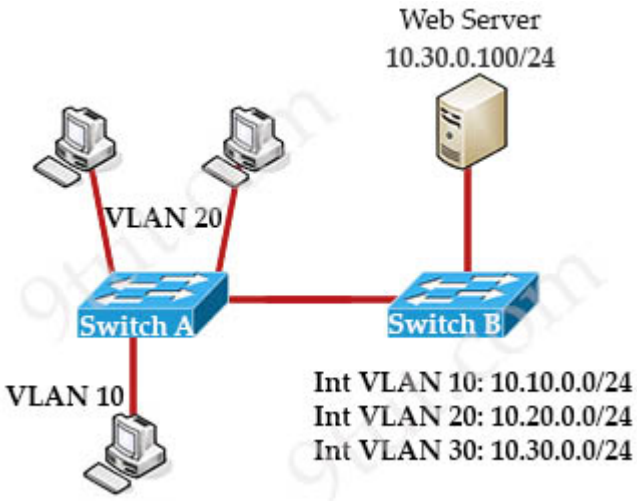

- A. onfig t
  ip access-list extended wwwblock
  deny tcp any host 10.30.0.100 eq 80
  int vlan 20
  ip access-group wwwblock in

- B. config t
  ip access-list extended wwwblock
  deny tcp any host 10.30.0.100 eq 80
  int vlan 100
  ip access-group wwwblock in
- C. config t
  ip access-list extended wwwblock
  permit ip any any
  deny tcp any host 10.30.0.100 eq 80
  int vlan 30
  ip access-group wwwblock in

- **D. config t**
  ip access-list extended wwwblock
  deny tcp any host 10.30.0.100 eq 80
  permit ip any any
  int vlan 20
  ip access-group wwwblock in

Explanation


The “deny tcp any host 10.30.0.100 eq 80” command means “block all (any) traffic from accessing web server at 10.30.0.100 on port 80”. And since it is applied to VLAN 20 interface so only computers on VLAN 20 are affected.

In summary, just notice that 10.30.0.100 here is the destination IP address, not source address.

Note: The traffic flow from hosts in VLAN 20 to the Web Server is: host in VLAN 20 -> Interface VLAN 20 -> Interface VLAN 30 -> Web Server. If we place the ACL: host in VLAN 20 -> (ACL Inbound) Interface VLAN 20 -> Interface VLAN 30 -> Web Server. Therefore the ACL can block traffic from VLAN 20.

Question 2

Refer to the exhibit. An extended ACL has been configured and applied to router R2. The configuration failed to work as intended. Which two changes stop outbound traffic on TCP ports 25 and 80 to 10.0.20.0/26 from the 10.0.10.0/26 subnet while still allowing all other traffic? (Choose two)

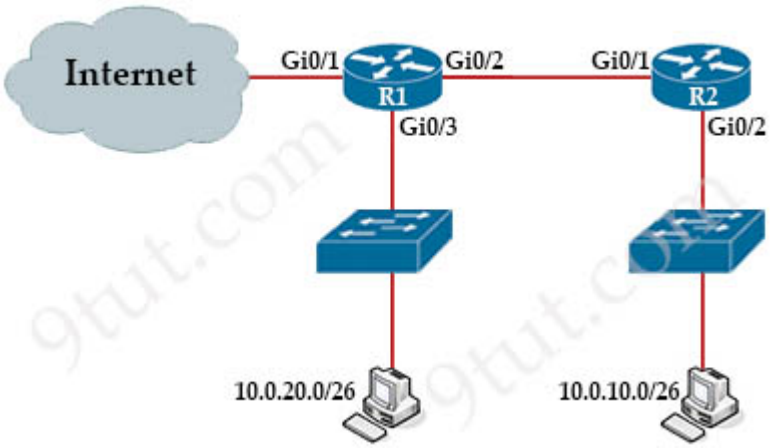


```
R2#config t
R2(config)#access-list 101 deny tcp 10.0.20.0 0.0.0.63 10.0.10.0 0.0.0.63 eq smtp
R2(config)#access-list 101 deny tcp 10.0.20.0 0.0.0.63 10.0.10.0 0.0.0.63 eq www
R2(config)#int gi0/2
R2(config-if)#ip access-group 101 in
```

- **A. The source and destination IPs must be swapped in ACL 101**
- **B. Add a "permit ip any any" statement at the end of ACL 101 for allowed traffic**
- C. The ACL must be configured the Gi0/2 interface inbound on R1
- D. The ACL must be moved to the Gi0/1 interface outbound on R2
- E. Add a "permit ip any any" statement to the beginning of ACL 101 for allowed traffic

Question 3

Refer to the exhibit. An administrator configures the following ACL in order to prevent devices on the 192.168.1.0 subnet from accessing the server at 10.1.1.5:

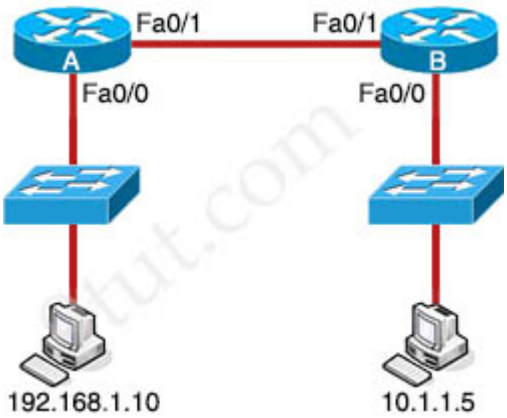


```
access-list 100 deny ip 192.168.1.0 0.0.0.255 host 10.1.1.5
access-list 100 permit ip any any
```

Where should the administrator place this ACL for the most efficient use of network resources?

- **A. inbound on router A Fa0/0**
- B. outbound on router B Fa0/0
- C. inbound on router B Fa0/1
- D. outbound on router A Fa0/1

Explanation

By placing the ACL closest to the source, we can reduce unnecessary traffic passing between two routers and the processing time of the router.

Question 4

Refer to the exhibit.

```
interface GigabitEthernet0/1
 ip address 192.168.1.2 255.255.255.0
 ip access-group 2699 in
```

```
!
access-list 2699 deny icmp any 10.10.1.0 0.0.0.255 echo
access-list 2699 deny ip any 10.20.1.0 0.0.0.255
access-list 2699 permit ip any 10.10.1.0 0.0.0.255
access-list 2699 permit tcp any 10.20.1.0 0.0.0.127 eq 22
```

A network administrator must permit SSH access to remotely manage routers in a network. The operations team resides on the 10.20.1.0/25 network. Which command will accomplish this task?

- A. access-list 2699 permit tcp any 10.20.1.0 0.0.0.255 eq 22
- B. access-list 2699 permit udp 10.20.1.0 0.0.0.255
- **C. no access-list 2699 deny ip any 10.20.1.0 0.0.0.255**
- D. no access-list 2699 deny tcp any 10.20.1.0 0.0.0.127 eq 22


Explanation

The operations team resides on 10.20.1.0/25 network which is a part of 10.20.1.0/24 network so we need to remove the “deny” statement of the 10.20.1.0/25 network to allow SSH.

Note: the ACL is blocking the reply traffic so 10.20.1.0/25 should be the destination.

Question 5


Refer to the exhibit. Which two configurations would be used to create and apply a standard access list on R1, so that only the 10.0.70.0/25 network devices are allowed to access the internal database server? (Choose two)

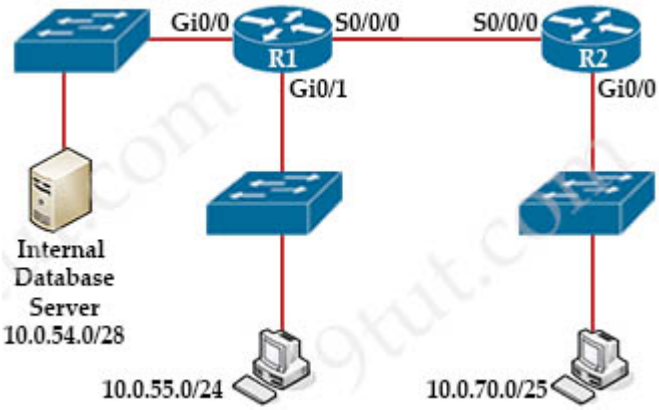

- A. R1(config)# access-list 5 permit any
- B. R1(config)# access-list 5 permit 10.0.54.0 0.0.1.255
- **C. R1(config)# interface GigabitEthernet0/0**
  R1(config-if)# ip access-group 5 out
- D. R1(config)# interface Serial0/0/0
  R1(config-if)# ip access-group 5 in
- **E. R1(config)# access-list 5 permit 10.0.70.0 0.0.0.127**

Question 6

Refer to the exhibit. What configuration on R1 denies SSH access from PC-1 to any R1 interface and allows all other traffic?

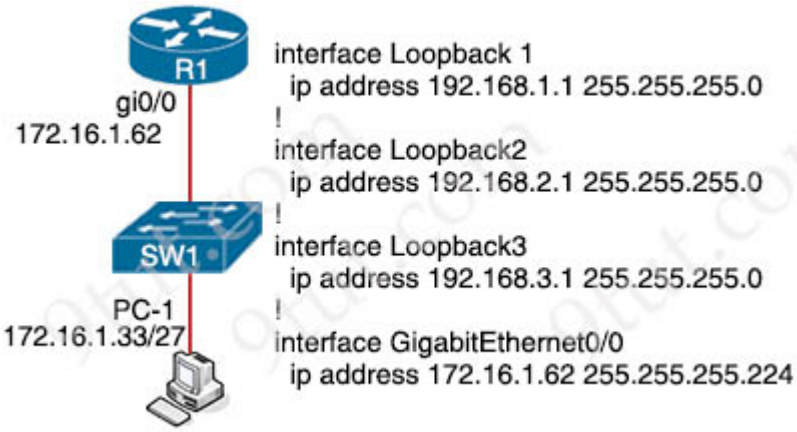

- A. access-list 100 deny tcp host 172.16.1.33 any eq 22
  access-list 100 permit ip any any
- **B. access-list 100 deny tcp host 172.16.1.33 any eq 22**
  access-list 100 permit ip any any
  interface GigabitEthernet0/0
  ip access-group 100 in
- C. line vty 0 15
  access-class 100 in
  access-list 100 deny tcp host 172.16.1.33 any eq 23
  access-list 100 permit ip any any

  interface GigabitEthernet0/0
  ip access-group 100 in
- D. access-list 100 deny tcp host 172.16.1.33 any eq 23
  access-list 100 permit ip any any
  line vty 0 15
  access-class 100 in

Explanation

To deny SSH, we must block TCP port 22 and we need to apply the ACL to Gi0/0 interface (which connects to PC-1).

Note: TCP port 23 is used for Telnet.

Question 7

While examining excessive traffic on the network, it is noted that all incoming packets on an interface appear to be allowed even though an IPv4 ACL is applied to the interface. Which two misconfigurations cause this behavior? (Choose two)

- A. A matching deny statement is too high in the access list
- **B. A matching permit statement is too high in the access list**
- C. A matching permit statement is too broadly defined
- **D. The ACL is empty**
- E. The packets fail to match any permit statement

Explanation

If we have a matching permit statement too high in the access list then it will be matched first before we can deny i -> Answer B is correct.

The statement that an ACL always has an implicit deny any at the bottom has one exception. And that exception **is when the ACL is empty**. If you use ip access-group to apply an ACL and that ACL has no statements then all traffic is permitted -> Answer D is correct.

Reference: https://community.cisco.com/t5/routing/apply-empty-acl-what-happens/td-p/740473

Note: Answer "A matching permit statement is too broadly defined" seems to be correct too but we only have two choices in this question and this answer is not in the best answers. If a matching permit statement is too broadly defined (for example if we only want to permit TCP traffic then we should not permit “ip” traffic, which includes both TCP and UDP).

Comments (16) Comments

1. Anonymus
   March 4th, 2021

   Can anyone please explain to me why the question “Refer to the exhibit. What configuration on R1 denies SSH access from PC-1 to any R1 interface and allows all other traffic?” Says the ACL is applied to the physical int G0/0? Aren’t the ACLs for SSH supposed to be applied to a line vty?

   Thanks

2. tank
   April 6th, 2021

   Yes and no you could block any protocol including SSH on an interface but you can also permit it in line vty for only allowing a specific subnet to access the router

3. Anonymus
   June 30th, 2022

   I think its because the pc is connected via sw1 to the R1’s g0/0 port as per the exhibit.

4. Mau Ramirez
   January 25th, 2023

   Could you please explain the answer on this question?
   A network administrator must permit SSH access to remotely manage routers in a network. The operations team resides on the 10.20.1.0/25 network. Which command will accomplish this task?

   Even when the provided answer I do not understand based on the options listed.

5. 9tut
   January 25th, 2023

   @Mau Ramirez: The second statement of the ACL “access-list 2699 deny ip any 10.20.1.0 0.0.0.255” denied SSH traffic from operations team on the 10.20.1.0/25 network so we must remove this ACL statement.

6. Ok-net
   February 3rd, 2023

   Question 4 the answer should be outbound on router A Fa0/0 instead of inbound. Explain please

7. Anonymous
   February 16th, 2023

   @9tut,

   Question: While examining excessive traffic on the network, it is noted that all incoming packets on an interface appear to be allowed even though an IPv4 ACL is applied to the interface. Which two misconfigurations cause this behavior? (Choose two)

   Please check this out, it is very interesting about “empty ACLs” which on an interface do not have the implicit deny, so all traffic will be allowed through:
   https://community.cisco.com/t5/routing/apply-empty-acl-what-happens/td-p/740473

   This can happen because removing an access list in global config mode does not automatically remove it from an interface. So if you do that and forget to also remove it from an interface, the interface ACL is now empty and everything will go through. Try it out and see.

8. 9tut
   February 16th, 2023

   @Anonymous: Thank you for your information, we updated the answer of this question!

9. LP
   April 12th, 2024

   Refer to the exhibit. What configuration on R1 denies SSH access from PC-1 to any R1 interface and allows all other traffic?

   The given answer only applies the ACL to Gi0/0. What about the Loopback interfaces?

10. 9tut
    April 12th, 2024

    @LP: Traffic from PC-1 must go through Gi0/0 before reaching Loopback interface so it can be filtered on Gi0/0 interface.

11. Student
    May 4th, 2024

    Please change Q4 explanation. Empty ACL allows all traffic. If ACL is empty there is no implicit deny.

12. 9tut
    May 4th, 2024

    @Student: We also mentioned it in the explanation:
    “The statement that an ACL always has an implicit deny any at the bottom has one exception. And that exception is when the ACL is empty. If you use ip access-group to apply an ACL and that ACL has no statements then all traffic is permitted”.

13. Anonymous
    November 13th, 2024

    For Question:
    While examining excessive traffic on the network, it is noted that all incoming packets on an interface appear to be allowed even though an IPv4 ACL is applied to the interface. Which two misconfigurations cause this behavior? (Choose two)

    A. A matching deny statement is too high in the access list
    B. The ACL is emptycorrect
    C. A matching permit statement is too high in the access listcorrect

D. The packets fail to match any permit statement
E. A matching permit statement is too broadly defined

Can you make sure you got the right answer? Some said, B and A then some said, B and E..

14. Anonymous
November 13th, 2024

For Question:
While examining excessive traffic on the network, it is noted that all incoming packets on an interface appear to be allowed even though an IPv4 ACL is applied to the interface. Which two misconfigurations cause this behavior? (Choose two)

A. A matching deny statement is too high in the access list
B. The ACL is empty
C. A matching permit statement is too high in the access list
D. The packets fail to match any permit statement
E. A matching permit statement is too broadly defined

Can you make sure you got the right answer? Some said, B and C then some said, B and E..

15. Anonymous
February 19th, 2025

I don’t get this question: “A network administrator must permit SSH access to remotely manage routers in a network. The operations team resides on the 10.20.1.0/25 network. Which command will accomplish this task?”
So you would want to permit 10.20.1.0 as the SOURCE to the destination of tcp router ip(s) eq 22. But all the options are written in this format:
access-list 2699 permit tcp any 10.20.1.0 0.0.0.127 eq 22

So in these cases 10.20.1.0/25 is the DESTINATION. Another nonsensical question which i assume is not 9tut’s fault as “he” is just quoting some source I imagine.

16. 9tut
February 20th, 2025

@Anonymous: In this question, the ACL is blocking the reply traffic so 10.20.1.0/25 should be the destination.

Add a Comment
Name

Submit Comment
Subscribe to comments feed
AAA Quiz HSRP Quiz

Premium Member Zone

Welcome Darène MAYISSA!

- Welcome Premium Member!
- CCNA - New Questions Part 5
- CCNA - New Questions Part 6
- CCNA - New Questions Part 7
- CCNA - New Questions Part 8
- CCNA - New Questions Part 9
- CCNA - New Questions Part 10
- CCNA - New Questions Part 11
- CCNA - New Questions Part 12
- CCNA - New Questions Part 13
- CCNA - New Questions Part 14
- CCNA - New Questions Part 15
- CCNA - New Questions Part 16
- Composite Quizzes
- === New CCNA v1.1 Lab Sims (very important) ===
- Voice VLAN Configuration Sim 2
- Voice VLAN & LLDP Sim
- Allowed, Native VLAN & LACP Sim
- Static Routing Configuration Sim 4
- IPv4 and IPv6 Connectivity Sim
- VLAN & CDP Sim 2
- IPv4 and IPv6 Assignment Sim
- VLAN CDP & LLDP Sim
- OSPF Configuration Sim 2
- OSPF Configuration Sim 3
- Trunking & LACP Sim
- VLAN Configuration Sim
- Allowed, Native VLAN & LACP Sim 2
- 802.1Q Trunking & LACP
- IPv4 and IPv6 Assignment Sim 2
- 802.1Q Trunking, Native VLAN & LACP
- Static Routing Configuration Sim 5
- Static Routing Configuration Sim 6
- PAT, NTP & DHCP Relay Sim
- OSPF DR Sim
- NACL DHCP Snooping 3
- NAT DHCP SSH Sim
- ==== Lab Sims for CCNA (although they are rather old but please learn all of them too) ====
- IP Services Sim Version 2
- OSPF Configuration Sim
- LACP Configuration Sim
- Voice VLAN Configuration Sim
- VLAN and Trunking Configuration Sim
- Named Access-list & Port Security Sim
- Named Access-list & DHCP Snooping Sim
- VLAN and CDP Sim
- IPv4 and IPv6 Deployment Sim
- Static Routing Configuration Sim 3
- VLAN & LLDP Sim
- IPv6 Static Routing Sim
- Named Access-list & DHCP Snooping Sim 2
- ISL Trunking and LACP Sim
- === Below Sims are old and retired so you do not need to learn them ===
- Static Routing Configuration Sim 2
- IP Services Sim
- Static Routing Configuration Sim

CCNA Training

- CCNA Knowledge
- CCNA Tutorials, Practice Labs & Lab Challenges
- Spine-Leaf Architecture Tutorial
- Generative AI vs Predictive AI Tutorial
- REST API Tutorial
- Network Time Protocol (NTP) Tutorial
- DHCP Snooping Tutorial
- What is SDN?
- How a router makes a forwarding decision
- Configure SSH for Remote Access on Cisco Router
- Key Security Concepts Tutorial
- Forwarding per-hop behavior (PHB) for QoS Tutorial
- Port Security Tutorial
- Puppet Tutorial
- Chef Tutorial
- Ansible Tutorial
- JSON Tutorial
- Layer 2 Threats and Security Features
- AAA TACACS+ and RADIUS Tutorial
- STP Root Port Election Tutorial
- TCP and UDP Tutorial
- WAN Tutorial
- DHCP Tutorial
- Simple Network Management Protocol SNMP Tutorial
- Syslog Tutorial
- EtherChannel Tutorial
- Hot Standby Router Protocol HSRP Tutorial
- InterVLAN Routing Tutorial
- Cisco Command Line Interface CLI
- Cisco Router Boot Sequence Tutorial
- OSI Model Tutorial
- Subnetting Tutorial – Subnetting Made Easy
- Frame Relay Tutorial
- Wireless Tutorial
- Virtual Local Area Network VLAN Tutorial
- VLAN Trunking Protocol VTP Tutorial
- IPv6 Tutorial
- Rapid Spanning Tree Protocol RSTP Tutorial
- Spanning Tree Protocol STP Tutorial
- Network Address Translation NAT Tutorial
- Access List Tutorial
- RIP Tutorial
- EIGRP Tutorial
- OSPF Tutorial
- Practice CCNA GNS3 Labs
- CCNA Lab Challenges

CCNA 200-301

- CCNA FAQs & Tips
- Basic Questions
- Topology Architecture Questions
- Cloud & Virtualization Questions

- CDP & LLDP Questions
- Switch Questions
- VLAN & Trunking Questions
- VLAN & Trunking Questions 2
- STP & VTP Questions
- EtherChannel Questions
- TCP & UDP Questions
- IP Address & Subnetting Questions
- IP Routing Questions
- IP Routing Questions 2
- OSPF Questions
- OSPF Questions 2
- EIGRP Questions
- NAT Questions
- NTP Questions
- Syslog Questions
- HSRP Questions
- Access-list Questions
- AAA Questions
- Security Questions
- Security Questions 2
- DAI Questions
- IPv6 Questions
- DNS Questions
- QoS Questions
- Port Security Questions
- Wireless Questions
- Wireless Questions 2
- SDN Questions
- DNA Center Questions
- Drag Drop Questions
- Drag Drop Questions 2
- Drag Drop Questions 3
- VPN Questions
- DHCP Questions
- Automation Questions
- Miscellaneous Questions
- Share your CCNA Experience

Network Resources

- Free Router Simulators
- CCNA Website
- ENCOR Website
- ENSDWI Website
- ENARSI Website
- DevNet Website
- CCIE R&S Website
- Security Website

- Wireless Website
- Design Website
- Data Center Website
- Service Provider Website
- Collaboration Website

Top



Copyright © 2014 - 2026 CCNA Training
Privacy Policy | Disclaimer | Contact Us