PDF-XChange Product Click to buy NOW! www.tracker-software.com

Type text to search here...

Drag Drop Quiz 2

Go to comments

Result of Drag Drop Quiz 2:

Total Questions	Full Score	Passing Rate	Your Score	Correct Answer Percentage	Elapsed
10	625	80%	600	96%	00:03:55

Congratulations!

You passed this test!

If you want to retake this quiz, please press Ctrl + F5 on Windows or press CMD + R on Mac.

Your answers are shown below:

Question 1

Drag each route source from the left to the numbers on the right. Beginning with the lowest and ending with the highest administrative distance.

1 connected ✔
2 static ✔
3 EBGP ✔
4 EIGRP ✔
5 OSPF ✔
6 RIP ✔

Explanation

1: connected (AD = 0)
2: static (AD = 1)
3: EBGP (AD = 20)
4: EIGRP (AD = 90)
5 :OSPF (AD = 110)
6: RIP (AD = 120)

Answer:

1: connected
2: static

PDF-XChange Product Click to buy NOW! www.tracker-software.com

3: EB
4: EIG P
F
6: RIP

Question 2

Order the DHCP message types as they would occur between a DHCP client and a DHCP server.

First DHCPDISCOVER ✔
Second DHCPOFFER ✔
Third DHCPREQUEST ✔
Fourth DHCPACK ✔

Explanation

There are four messages sent between the DHCP Client and DHCP Server: DHCP**D**ISCOVER, DHCP**O**FFER, DHCP**R**EQUEST and DHCP**A**CKNOWLEDGEMENT. This process is often abbreviated as **DORA** (for Discover, Offer, Request, Acknowledgement).

Answer:


+ First: DHCPDISCOVER
+ Second: DHCPOFFER
+ Third: DHCPREQUEST
+ Fourth: DHCPACK

Question 3

An interface has been configured with the access list that is shown below.

```
access-list 107 deny tcp 207.16.12.0 0.0.3.255 any eq http
access-list 107 permit ip any any
```

On the basis of that access list, drag each information packet on the left to the appropriate category on the right.

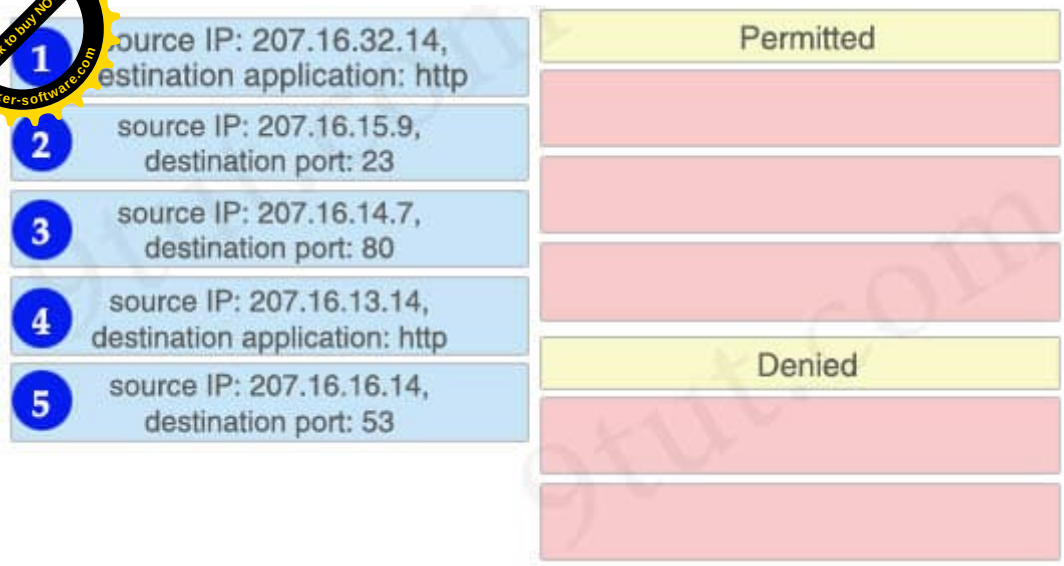

Please type the corresponding numbers of each item on the left to the blank below and arrange them ascendingly. For example: 13524 (which means 135 for first group, 24 for second group)

Please type your answer here: 12534


Explanation

From the ACL:

access-list 107 deny tcp 207.16.12.0.0.3.255 any eq http
access-list 107 permit ip any any
We can deduce it block all source hosts in 207.16.12.0/22 range (which ranges from 207.16.12.0 to 207.16.15.255) via HTTP (port 80) while permit any other hosts.

Question 4

Match the functions to the corresponding layers. (Not all options are used)

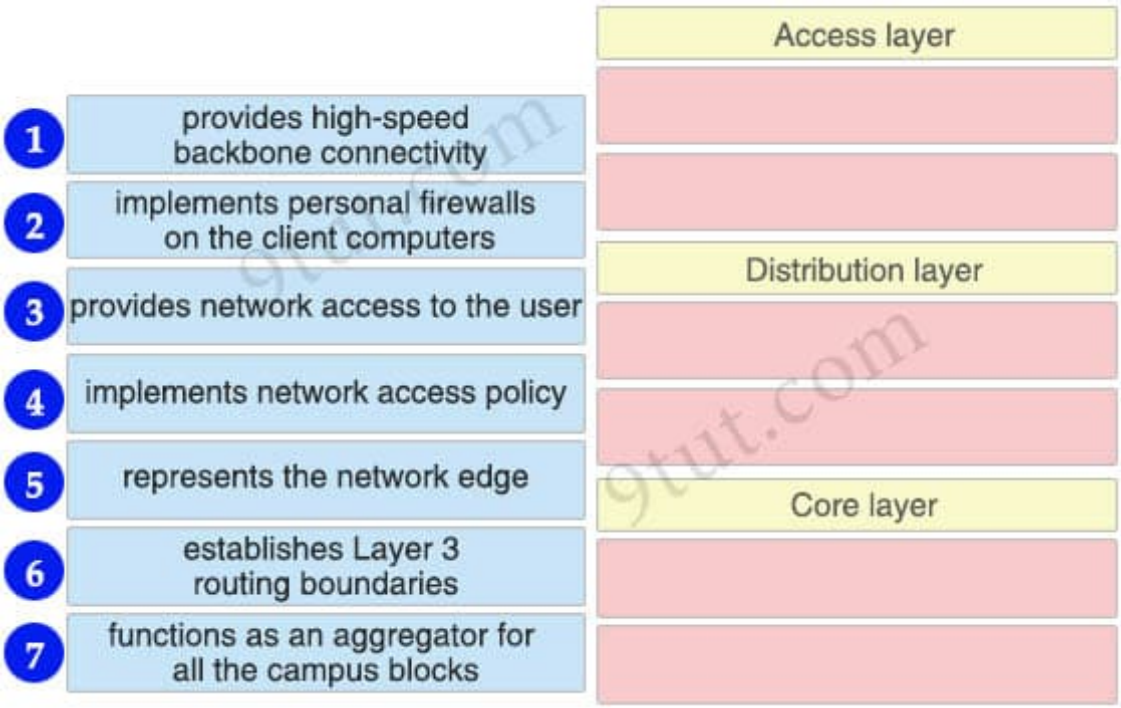

PDF-XChange Product Click to buy NOW! www.tracker-software.com

Please type the corresponding numbers of each item on the left to the blank below and arrange them ascendingly. For example: 135724 (which means 13 for first group, 57 for second group and 24 for the ...)

Please type your answer here: 354617 ✔


Explanation

A typical enterprise hierarchical LAN campus network design includes the following three layers:
+ Access layer: Provides workgroup/user access to the network
+ Distribution layer: Provides policy-based connectivity and controls the boundary between the access and core layers
+ Core layer: Provides fast transport between distribution switches within the enterprise campus

Reference: https://www.ciscopress.com/articles/article.asp?p=2202410&seqNum=4

Question 5

Refer to the exhibit. Drag and drop the routing table components on the left onto the corresponding letter from the exhibit on the right. Not all options are used.

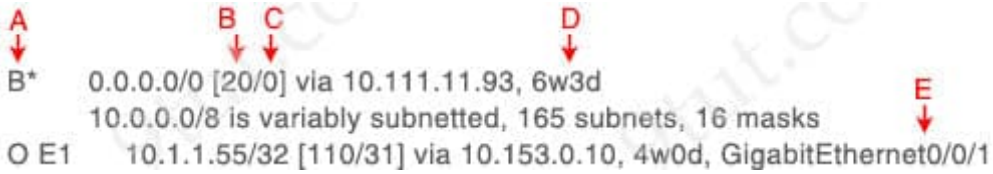


1 administrative distance	A
2 metric	B
3 next-hop interface	C
4 outbound interface	D
5 route source	E
6 subnet mask	
7 timestamp	

Please type the corresponding numbers of each item on the left to the blank below that match the A B C D E items on the right. For example: 35176 (which means 3 for A, 5 for B, 1 for C, 7 for D and 6 for E)

Please type your answer here: 51274 ✔

Question 6

Drag the descriptions of device management from the left onto the types of device management on the right.

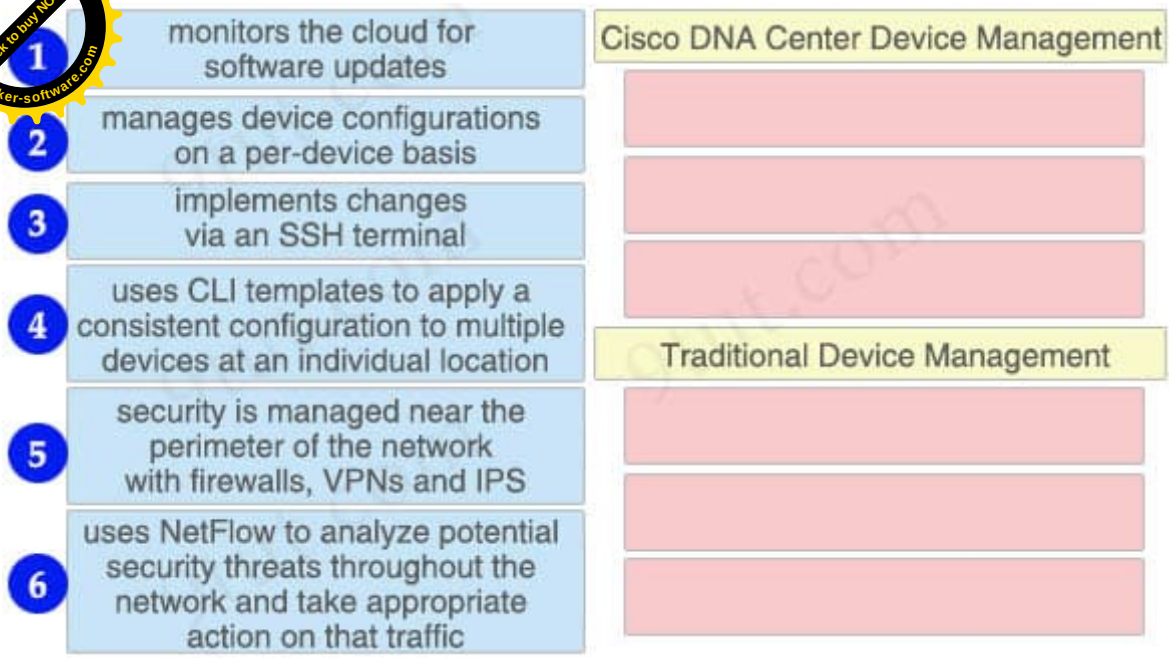

Please type the corresponding numbers of each item on the left to the blank below and arrange them ascendingly. For example: 136245 (which means 136 for first group, 245 for second group).
Please type your answer here: 146235 ✔

Question 7

Drag and drop each broadcast IP address on the left to the Broadcast Address column on the right. Not all options are used.




Please type the corresponding numbers of each item on the left to the blank below and arrange them ascendingly. For example: 1256 (which means items 1, 2, 5 and 6 are chosen for Broadcast addresses)

Please type your answer here: 2346 ✔

Question 8

Drag and drop to the characteristics of networking from the left onto the correct networking types on the r

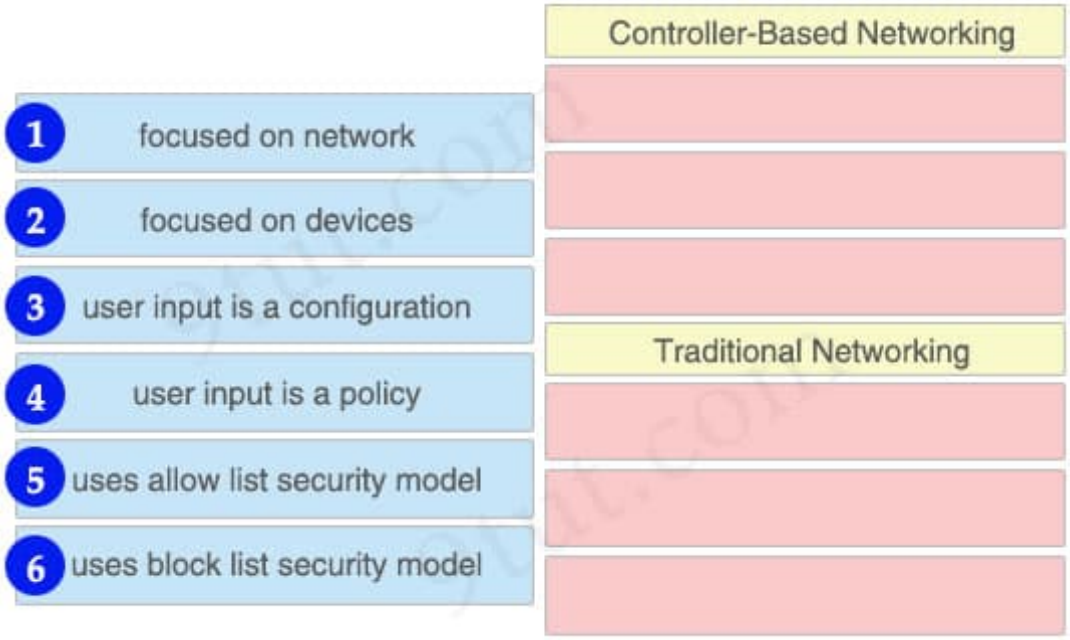

Please type the corresponding numbers of each item on the left to the blank below and arrange them ascendingly. For example: 1324 (which means 13 for first group, 24 for second group)

Please type your answer here: 145326 (correct answer: 145236) ✖

Explanation

Traditional Networking uses block list model because all traffic is allowed to pass through initially until we configure an ACL, prefix-list… This model is more lenient, because if no application knowledge exists, the default network configuration will let everything through. From a security perspective, it is very dangerous though – every time you allow a protocol that the application does not need, you are unnecessarily increasing your attack surface, and therefore compromising the overall application security.

In Controller-Based Networking, everything is denied by default until we explicitly allow them by a white (allow) list.

Question 9

Drag and drop the attack-mitigation techniques from the left onto the types of attack that they mitigate on the right.


802.1q double-tagging VLAN-hopping attack	configure the native VLAN with a nondefault VLAN ID ✔
MAC flooding attack	configure 802.1x authenticate ✔
man-in-the-middle spoofing attack	configure DHCP snooping ✔
switch-spoofing VLAN-hopping attack	disable DTP ✔

PDF-XChange Product Click to buy NOW! www.tracker-software.com

Explanation

VLAN Hopping: By altering the VLAN ID on packets encapsulated for trunking, an attacking device can send or receive packets on various VLANs, bypassing Layer 3 security measures. VLAN hopping can be accomplished by switch spoofing or double tagging.

a. Switch spoofing:

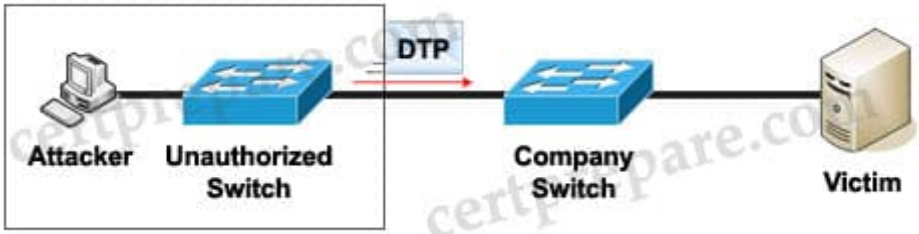


The attacker can connect an unauthorized Cisco switch to a Company switch port. The unauthorized switch can send DTP frames and form a trunk with the Company Switch. If the attacker can establish a trunk link to the Company switch, it receives traffic to all VLANs through the trunk because all VLANs are allowed on a trunk by default.

(Instead of using a Cisco Switch, the attacker can use a software to create and send DTP frames).

To mitigate this type of attack, we can disable DTP.

b. Double-Tagging attack:

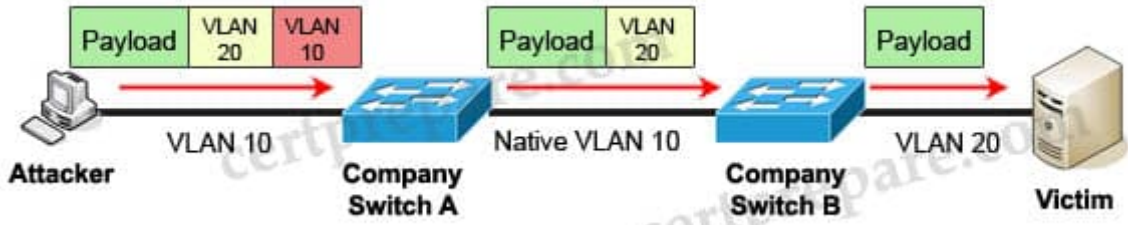

In this attack, the attacking computer generates frames with two 802.1Q tags. The first tag matches the native VLAN of the trunk port (VLAN 10 in this case), and the second matches the VLAN of a host it wants to attack (VLAN 20).

When the packet from the attacker reaches Switch A, Switch answer " only sees the first VLAN 10 and it matches with its native VLAN 10 so this VLAN tag is removed. Switch answer " forwards the frame out all links with the same native VLAN 10. Switch answer " receives the frame with an tag of VLAN 20 so it removes this tag and forwards out to the Victim computer.

Note: This attack only works if the trunk (between two switches) has the same native VLAN as the attacker.

To mitigate this type of attack, we can use VLAN access control lists (VACLs, which applies to all traffic within a VLAN. We can use VACL to drop attacker traffic to specific victims/servers) or implement Private VLANs.


Answer:

+ 802.1q double-tagging VLAN-hopping attack: configure the native VLAN with a nondefault VLAN ID
+ MAC flooding attack: configure 802.1x authenticate
+ man-in-the-middle spoofing attack: configure DHCP snooping
+ switch-spoofing VLAN-hopping attack: disable DTP

PDF-XChange Product Click to buy NOW! www.tracker-software.com

...tion 10

An engineer is tasked with verifying network configuration parameters on a client workstation to report back to the team lead. Drag and drop the node identifiers from the left onto the network parameters on the right.

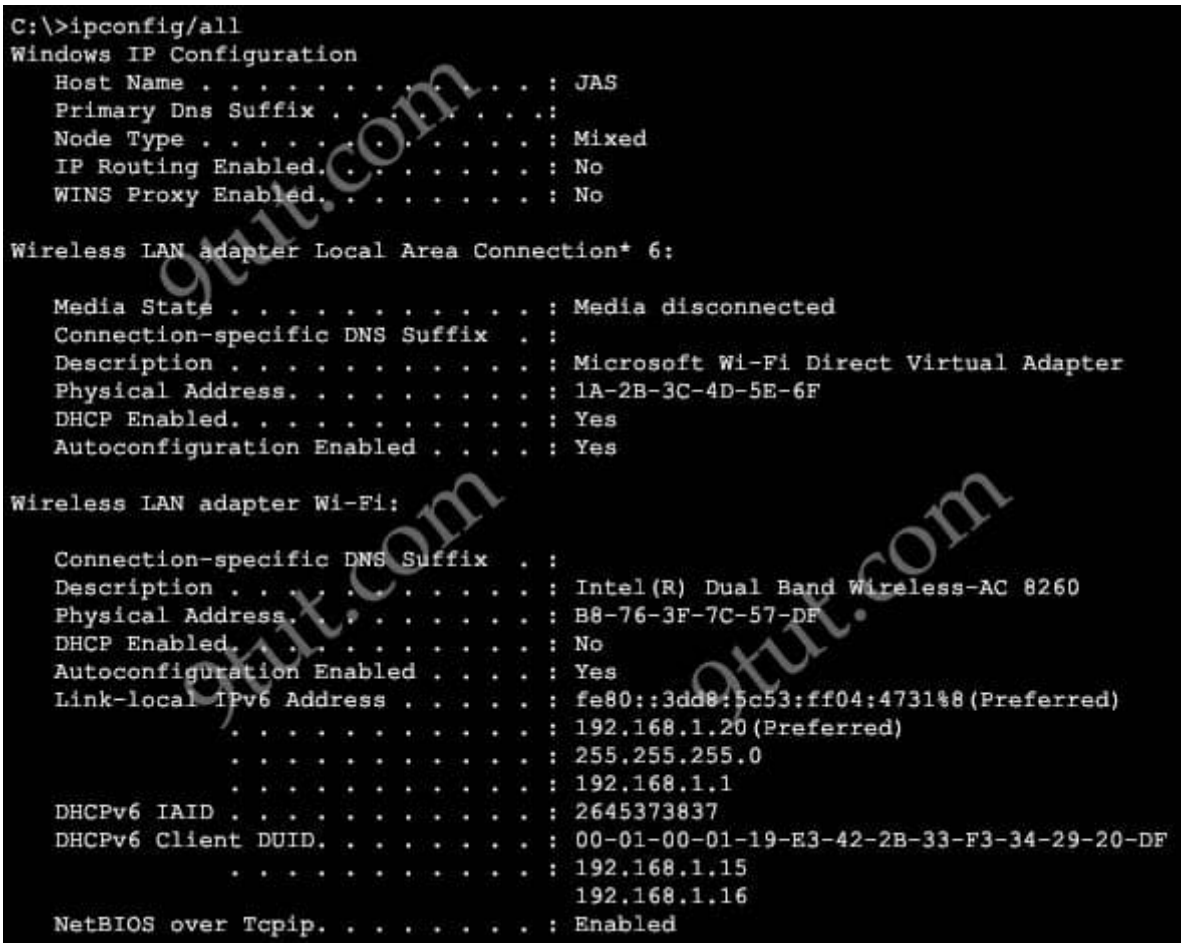

Note: You just need to click on one of the boxes on the right to match it with the corresponding box on the left.

192.168.1.255	broadcast address ✔
192.168.1.1	default gateway ✔
192.168.1.20	host IP address ✔
B8-76-3F-7C-57-DF	MAC address ✔
192.168.1.254	last assignable IP address in the subnet ✔

Explanation

In the output above, three lines under "Link-local IPv6 Address" line have been blacked out so we have to figure out what they are. They are the IP address of the Wireless card and the Default gateway of this computer.

Answer:

+ broadcast address: 192.168.1.255
+ default gateway: 192.168.1.1
+ host IP address: 192.168.1.20
+ MAC address: B8-76-3F-7C-57-DF
+ last assignable IP address in the subnet: 192.168.1.254

PDF-XChange Product Click to buy NOW! www.tracker-software.com

Comments (21) Comments

THX138
February 23rd, 2021

Question 6
Drag each route source from the left to the numbers on the right. Beginning with the lowest and ending with the highest administrative distance.
No route source is displayed

2. THX138
February 23rd, 2021

Sorry my bad..I misread the question

3. Pariahjf
June 16th, 2021

In question 10, the answer is shown as DROA, when it SHOULD be Discover, Offer, Request, Acknowledgement (DORA).

4. Pariahjf
June 16th, 2021

My above comment was referring to question 8, not 10!!!

5. 9tut
June 17th, 2021

@Pariahjf: We checked but found no problem. The order is “DORA”. Could you please try again?

6. Pariahjf
June 18th, 2021

Same results:

Order the DHCP message types as they would occur between a DHCP client and a DHCP server.

First DHCPDISCOVER Correct
Second DHCPREQUEST Wrong
Third DHCPOFFER Wrong
Fourth DHCPACK Correct

7. Pariahjf
June 18th, 2021

Please ignore the above—thanks….

8. Kobi
November 26th, 2021

Q9
My answer 146253 (correct answer: 146235) Can u correct it please

9. 9tut
November 27th, 2021

@Kobi: Our quiz can only score if the the numbers in each group are sorted in ascending order so instead of “253” please type “235” for the second group.

10. ude Question 6
bruary 22nd, 2022

The correct Order is :
Traditional Device Management:
+ manages device configurations on a per-device basis
+ security is managed near the perimeter of the network with firewalls, VPNs and IPS
+ implements changes via an SSH terminal

Or

+ manages device configurations on a per-device basis
+ implements changes via an SSH terminal
+ security is managed near the perimeter of the network with firewalls, VPNs and IPS

Does the order matter in the CCNA exam?

11. Jacob B
April 20th, 2022

Done

12. ben
April 5th, 2023

what is time stamp in question 9 can someone explain? @9tut

13. Ibis
November 5th, 2023

the following question have a repeated answer:

An interface has been configured with the access list that is shown below.

access-list 107 deny tcp 207.16.12.0.0.0.3.255 any eq http
access-list 107 permit ip any any
On the basis of that access list, drag each information packet on the left to the appropriate category on the right.

14. sachi
November 30th, 2023

i cant understand question 8. plz help

15. Student
May 9th, 2024

Question:
Controller Based Networking vs Traditional Network

Explain by 9tut
In Controller-Based Networking, everything is denied by default until we explicitly allow them by a white (allow) list.

You put Uses allow list security model in Controller Based Networking

This is you answer (correct answer: 145236).

If your answer is correct can you explain it more.

16. ut
ay 10th, 2024

@Student: We see our answers are correct. Controller-based Networking uses “allow list security model”.

17. Lvn
September 13th, 2024

“Drag and drop each broadcast IP address on the left to the Broadcast Address column on the right.”
@9tut nothing on the right column. Can u fix i?

18. AS
October 30th, 2024

is the formatting a typo with a period instead of a space between IP and wildcard ??
access-list 107 deny tcp 207.16.12.0.0.0.3.255 any eq http

access-list 107 deny tcp 207.16.12.0 0.0.3.255 any eq http

19. 9tut
October 30th, 2024

@AS: It is just a typo. Thank you for your detection, we updated it!

20. Anonymous
January 10th, 2025

“Drag and drop each broadcast IP address on the left to the Broadcast Address column on the right.”
@9tut nothing on the right column. Can u fix i?

21. 9tut
January 12th, 2025

@Anonymous: It means you need to find out all the broadcast addresses to fill the right column.

Add a Comment

Name

Submit Comment

Subscribe to comments feed

Security Questions 2 Wireless Quiz 2

Premium Member Zone

Welcome Darène MAYISSA!

- Welcome Premium Member!
- CCNA - New Questions Part 5
- CCNA - New Questions Part 6
- CCNA - New Questions Part 7
- CCNA - New Questions Part 8
- CCNA - New Questions Part 9

PDF-XChange Product Click to buy NOW! www.tracker-software.com
PDF-XChange Product Click to buy NOW! www.tracker-software.com

- CCNA - New Questions Part 10
- CCNA - New Questions Part 11
- CCNA - New Questions Part 12
- CCNA - New Questions Part 13
- CCNA - New Questions Part 14
- CCNA - New Questions Part 15
- CCNA - New Questions Part 16
- Composite Quizzes
- === New CCNA v1.1 Lab Sims (very important) ===
- Voice VLAN Configuration Sim 2
- Voice VLAN & LLDP Sim
- Allowed, Native VLAN & LACP Sim
- Static Routing Configuration Sim 4
- IPv4 and IPv6 Connectivity Sim
- VLAN & CDP Sim 2
- IPv4 and IPv6 Assignment Sim
- VLAN CDP & LLDP Sim
- OSPF Configuration Sim 2
- OSPF Configuration Sim 3
- Trunking & LACP Sim
- VLAN Configuration Sim
- Allowed, Native VLAN & LACP Sim 2
- 802.1Q Trunking & LACP
- IPv4 and IPv6 Assignment Sim 2
- 802.1Q Trunking, Native VLAN & LACP
- Static Routing Configuration Sim 5
- Static Routing Configuration Sim 6
- PAT, NTP & DHCP Relay Sim
- OSPF DR Sim
- NACL DHCP Snooping 3
- NAT DHCP SSH Sim
- ==== Lab Sims for CCNA (although they are rather old but please learn all of them too) ====
- IP Services Sim Version 2
- OSPF Configuration Sim
- LACP Configuration Sim
- Voice VLAN Configuration Sim
- VLAN and Trunking Configuration Sim
- Named Access-list & Port Security Sim
- Named Access-list & DHCP Snooping Sim
- VLAN and CDP Sim
- IPv4 and IPv6 Deployment Sim
- Static Routing Configuration Sim 3
- VLAN & LLDP Sim
- IPv6 Static Routing Sim
- Named Access-list & DHCP Snooping Sim 2
- ISL Trunking and LACP Sim
- === Below Sims are old and retired so you do not need to learn them ===
- Static Routing Configuration Sim 2
- IP Services Sim
- Static Routing Configuration Sim

CCNA Training

- CCNA Knowledge
- CCNA Tutorials, Practice Labs & Lab Challenges
- Spine-Leaf Architecture Tutorial
- Generative AI vs Predictive AI Tutorial

PDF-XChange Product Click to buy NOW! www.tracker-software.com

- [illegible]ST API Tutorial
- [illegible]twork Time Protocol (NTP) Tutorial
- DHCP Snooping Tutorial
- What is SDN?
- How a router makes a forwarding decision
- Configure SSH for Remote Access on Cisco Router
- Key Security Concepts Tutorial
- Forwarding per-hop behavior (PHB) for QoS Tutorial
- Port Security Tutorial
- Puppet Tutorial
- Chef Tutorial
- Ansible Tutorial
- JSON Tutorial
- Layer 2 Threats and Security Features
- AAA TACACS+ and RADIUS Tutorial
- STP Root Port Election Tutorial
- TCP and UDP Tutorial
- WAN Tutorial
- DHCP Tutorial
- Simple Network Management Protocol SNMP Tutorial
- Syslog Tutorial
- EtherChannel Tutorial
- Hot Standby Router Protocol HSRP Tutorial
- InterVLAN Routing Tutorial
- Cisco Command Line Interface CLI
- Cisco Router Boot Sequence Tutorial
- OSI Model Tutorial
- Subnetting Tutorial – Subnetting Made Easy
- Frame Relay Tutorial
- Wireless Tutorial
- Virtual Local Area Network VLAN Tutorial
- VLAN Trunking Protocol VTP Tutorial
- IPv6 Tutorial
- Rapid Spanning Tree Protocol RSTP Tutorial
- Spanning Tree Protocol STP Tutorial
- Network Address Translation NAT Tutorial
- Access List Tutorial
- RIP Tutorial
- EIGRP Tutorial
- OSPF Tutorial
- Practice CCNA GNS3 Labs
- CCNA Lab Challenges

CCNA 200-301

- CCNA FAQs & Tips
- Basic Questions
- Topology Architecture Questions
- Cloud & Virtualization Questions
- CDP & LLDP Questions
- Switch Questions
- VLAN & Trunking Questions
- VLAN & Trunking Questions 2
- STP & VTP Questions
- EtherChannel Questions

PDF-XChange Product Click to buy NOW! www.tracker-software.com

- TCP & UDP Questions
- IP Address & Subnetting Questions
- IP Routing Questions
- IP Routing Questions 2
- OSPF Questions
- OSPF Questions 2
- EIGRP Questions
- NAT Questions
- NTP Questions
- Syslog Questions
- HSRP Questions
- Access-list Questions
- AAA Questions
- Security Questions
- Security Questions 2
- DAI Questions
- IPv6 Questions
- DNS Questions
- QoS Questions
- Port Security Questions
- Wireless Questions
- Wireless Questions 2
- SDN Questions
- DNA Center Questions
- Drag Drop Questions
- Drag Drop Questions 2
- Drag Drop Questions 3
- VPN Questions
- DHCP Questions
- Automation Questions
- Miscellaneous Questions
- Share your CCNA Experience

Network Resources

- Free Router Simulators
- CCNA Website
- ENCOR Website
- ENSDWI Website
- ENARSI Website
- DevNet Website
- CCIE R&S Website
- Security Website
- Wireless Website
- Design Website
- Data Center Website

PDF-XChange Product Click to buy NOW! www.tracker-software.com

rvice Provider Website

Collaboration Website

Top



Copyright © 2014 - 2026 CCNA Training

Privacy Policy | Disclaimer | Contact Us