

Type text to search here...

Drag Drop Quiz 3

Go to comments

Result of Drag Drop Quiz 3:

Total Questions	Full Score	Passing Rate	Your Score	Correct Answer Percentage	Elapsed
8	210	80%	210	100%	00:04:01

Congratulations!

You passed this test!

If you want to retake this quiz, please press Ctrl + F5 on Windows or press CMD + R on Mac.

Your answers are shown below:

Question 1

Refer to the exhibit.

```
C:\>ipconfig/all
Windows IP Configuration
   Host Name . . . . . . . . . . . . : JAS
   Primary Dns Suffix . . . . . . . :
   Node Type . . . . . . . . . . . . : Mixed
   IP Routing Enabled. . . . . . . . : No
   WINS Proxy Enabled. . . . . . . . : No

Wireless LAN adapter Local Area Connection* 6:

   Media State . . . . . . . . . . . : Media disconnected
   Connection-specific DNS Suffix  . :
   Description . . . . . . . . . . . : Microsoft Wi-Fi Direct Virtual Adapter
   Physical Address. . . . . . . . . : 1A-76-3F-7C-57-DF
   DHCP Enabled. . . . . . . . . . . : Yes
   Autoconfiguration Enabled . . . . : Yes

Wireless LAN adapter Wi-Fi:

   Connection-specific DNS Suffix  . :
   Description . . . . . . . . . . . : Intel(R) Dual Band Wireless-AC 8260
   Physical Address. . . . . . . . . : B8-76-3F-7C-57-DF
   DHCP Enabled. . . . . . . . . . . : No
   Autoconfiguration Enabled . . . . : Yes
   Link-local IPv6 Address . . . . . : fe80::3dd8:5c53:ff04:4731%8(Preferred)
                . . . . . . . . . . . : 192.168.1.20(Preferred)
                . . . . . . . . . . . : 255.255.255.0
                . . . . . . . . . . . : 192.168.1.1
   DHCPv6 IAID . . . . . . . . . . . : 2645373837
   DHCPv6 Client DUID. . . . . . . . : 00-01-00-01-19-E3-42-2B-33-F3-34-29-20-DF
                . . . . . . . . . . . : 192.168.1.15
                                        192.168.1.16
   NetBIOS over Tcpip. . . . . . . . : Enabled
```

An engineer is required to verify that the network parameters are valid for the users wireless LAN connectivity on a /24 subnet. Drag and drop the values from the left onto the network parameters on the right. Not all values are used.

192.168.1.1	host IP address
192.168.1.255	broadcast address
192.168.1.20	network address
B8-76-3F-7C-57-DF	default gateway
1A-76-3F-7C-57-DF	MAC address
192.168.1.254	last assignable IP address in the subnet
192.168.1.0	

Note: You just need to click on one of the boxes on the right to match it with the corresponding box on the left. For unused value, please match it with "Unused" option.

192.168.1.20	host IP address ✔
192.168.1.255	broadcast address ✔
192.168.1.0	network address ✔
192.168.1.1	default gateway ✔

B8-76-3F-7C-57-DF MAC address ✔
192.168.1.254 last assignable IP address in the subnet ✔
1A-76-3F-7C-57-DF Unused ✔

Explanation

+ host IP address: 192.168.1.20
+ broadcast address: 192.168.1.255
+ network address: 192.168.1.0
+ default gateway: 192.168.1.1
+ MAC address: B8-76-3F-7C-57-DF
+ last assignable IP address in the subnet: 192.168.1.254

Question 2

Drag and drop the SNMP components from the left onto the descriptions on the right.

Note: You just need to click on one of the boxes on the right to match it with the corresponding box on the left.


unsolicited message	SNMP trap ✔
responds to status requests and requests for information about a device	SNMP agent ✔
collection of variables that can be monitored	MIB ✔
resides on an NMS	SNMP manager ✔

Explanation

+ unsolicited message: SNMP trap
+ responds to status requests and requests for information about a device: SNMP agent
+ collection of variables that can be monitored: MIB
+ resides on an NMS: SNMP manager

SNMP consists of 3 items:

+ **SNMP Manager** (sometimes called Network Management System – NMS): a software runs on the device of the network administrator (in most case, a computer) to monitor the network.
+ **SNMP Agent:** a software runs on network devices that we want to monitor (router, switch, server…)
+ **Management Information Base** (MIB): is the collection of managed objects. This components makes sure that the data exchange between the manager and the agent remains structured. In other words, MIB contains a set of questions that the SNMP Manager can ask the Agent (and the Agent can understand them). MIB is commonly shared between the Agent and Manager.

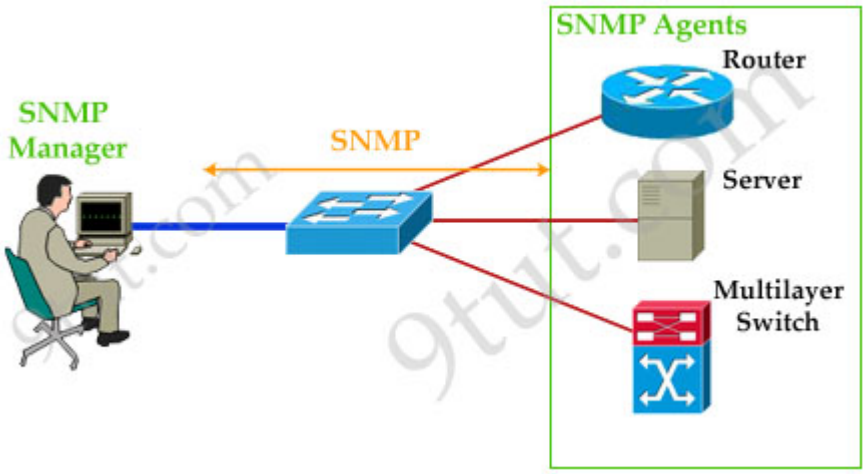

Question 3

Drag and drop the QoS congestion management terms from the left onto the description on the right.

services a specified number of bytes in one queue before continuing to the next queue	CQ ✔
provides guaranteed bandwidth to a specified class of traffic	CBWFQ ✔
places packets into one of four priority-based queues	PQ ✔
provides minimum guaranteed bandwidth to one or more flows	WFQ ✔
uses store-and-forward queuing	FIFO ✔


Explanation

+ services a specified number of bytes in one queue before continuing to the next queue: CQ
+ provides guaranteed bandwidth to a specified class of traffic: CBWFQ
+ places packets into one of four priority-based queues: PQ
+ provides minimum guaranteed bandwidth to one or more flows: WFQ
+ uses store-and-forward queuing: FIFO

First-in, first-out (FIFO): FIFO entails no concept of priority or classes of traffic. With FIFO, transmission of packets out the interface occurs in the order the packets arrive, which means no QoS
Priority Queuing (PQ): schedules traffic such that the higher-priority queues “always” get serviced first
Custom Queuing (CQ): provide specific traffic guaranteed bandwidth at a potential congestion point, assuring the traffic a fixed portion of available bandwidth and leaving the remaining bandwidth to other traffic.
Weighted fair queueing (WFQ): offers dynamic, fair queuing that divides bandwidth across queues of traffic based on weights. In standard WFQ, packets are classified into flows according to one of four criteria: the source Internet Protocol address (IP address), the destination IP address, the source Transmission Control Protocol (TCP) or User Datagram Protocol (UDP) port, or the destination TCP or UDP port.
Class-based weighted fair queueing (CBWFQ) extends the standard WFQ functionality to provide support for user-defined traffic classes. For CBWFQ, you define traffic classes based on match criteria including protocols, access control lists (ACLs), and input interfaces. Packets satisfying the match criteria for a class constitute the traffic for that class. A queue is reserved for each class, and traffic belonging to a class is directed to the queue for that class.
Once a class has been defined according to its match criteria, you can assign it characteristics. To characterize a class, you assign it bandwidth, weight, and maximum packet limit. The bandwidth assigned to a class is the guaranteed bandwidth delivered to the class during congestion.

Question 4

An engineer is tasked to configure a switch with port security to ensure devices that forward unicasts, multicasts, and broadcasts are unable to flood the port. The port must be configured to permit only two random MAC addresses at a time. Drag and drop the required configuration commands from the left onto the sequence on the right. (Not all commands are used)

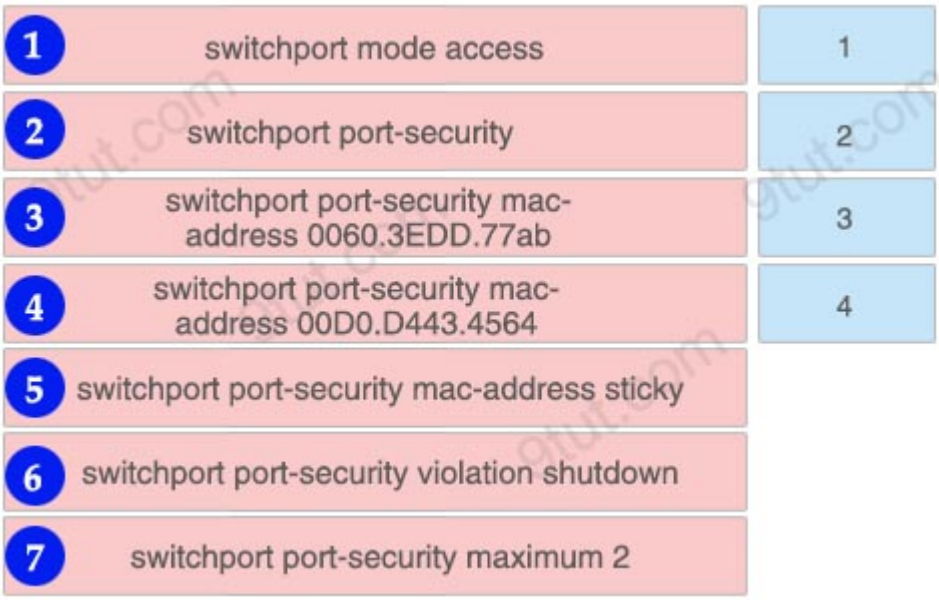

Note: Please type the four numbers into the box below to match them with sequence 1 to 4. For example: 2451.

Please type your answer here: 1276 ✔

Explanation

This question says "permit only two random MAC addresses at a time" so we cannot use the "switchport port-security mac-address sticky" command as the switch will only learn and save the first two MAC addresses forever. Although the command "switchport port-security violation shutdown" is unnecessary because it is the default state of port-security but it is not wrong to reuse it.

Note:


The full syntax of the second command is:

switchport port-security mac-address sticky [MAC]

If we don’t specify the MAC address (like in this question) then the switch will dynamically learn the attached MAC Address and place it into your running-configuration.

Question 5

Drag the characteristics of network architectures from the left onto the type of architecture on the right.

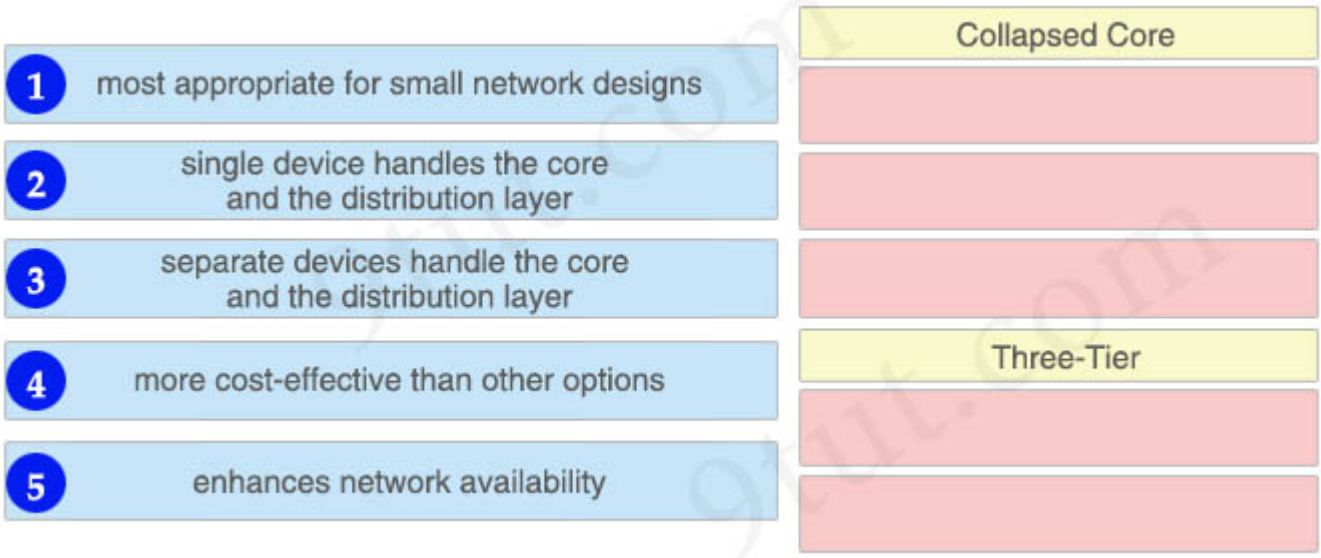


Note: Please type the corresponding numbers of each item on the left to the blank below and arrange them ascendingly. For example: 13524 (which means 135 for first group, 24 for second group).
Please type your answer here: 12435 ✔

Explanation

The three-tier hierarchical design maximizes performance, network availability, and the ability to scale the network design.
However, many small enterprise networks do not grow significantly larger over time. Therefore, a two-tier hierarchical design where the core and distribution layers are collapsed into one layer is often more practical. **A "collapsed core" is when the distribution layer and core layer functions are implemented by a single device**. The primary motivation for the collapsed core design is reducing network cost, while maintaining most of the benefits of the three-tier hierarchical model.

Reference: https://www.ciscopress.com/articles/article.asp?p=2202410&seqNum=4

A collapsed core network is shown below. The collapsed core network may be deployed with redundant core/distribution router, or consolidated core/distribution router.

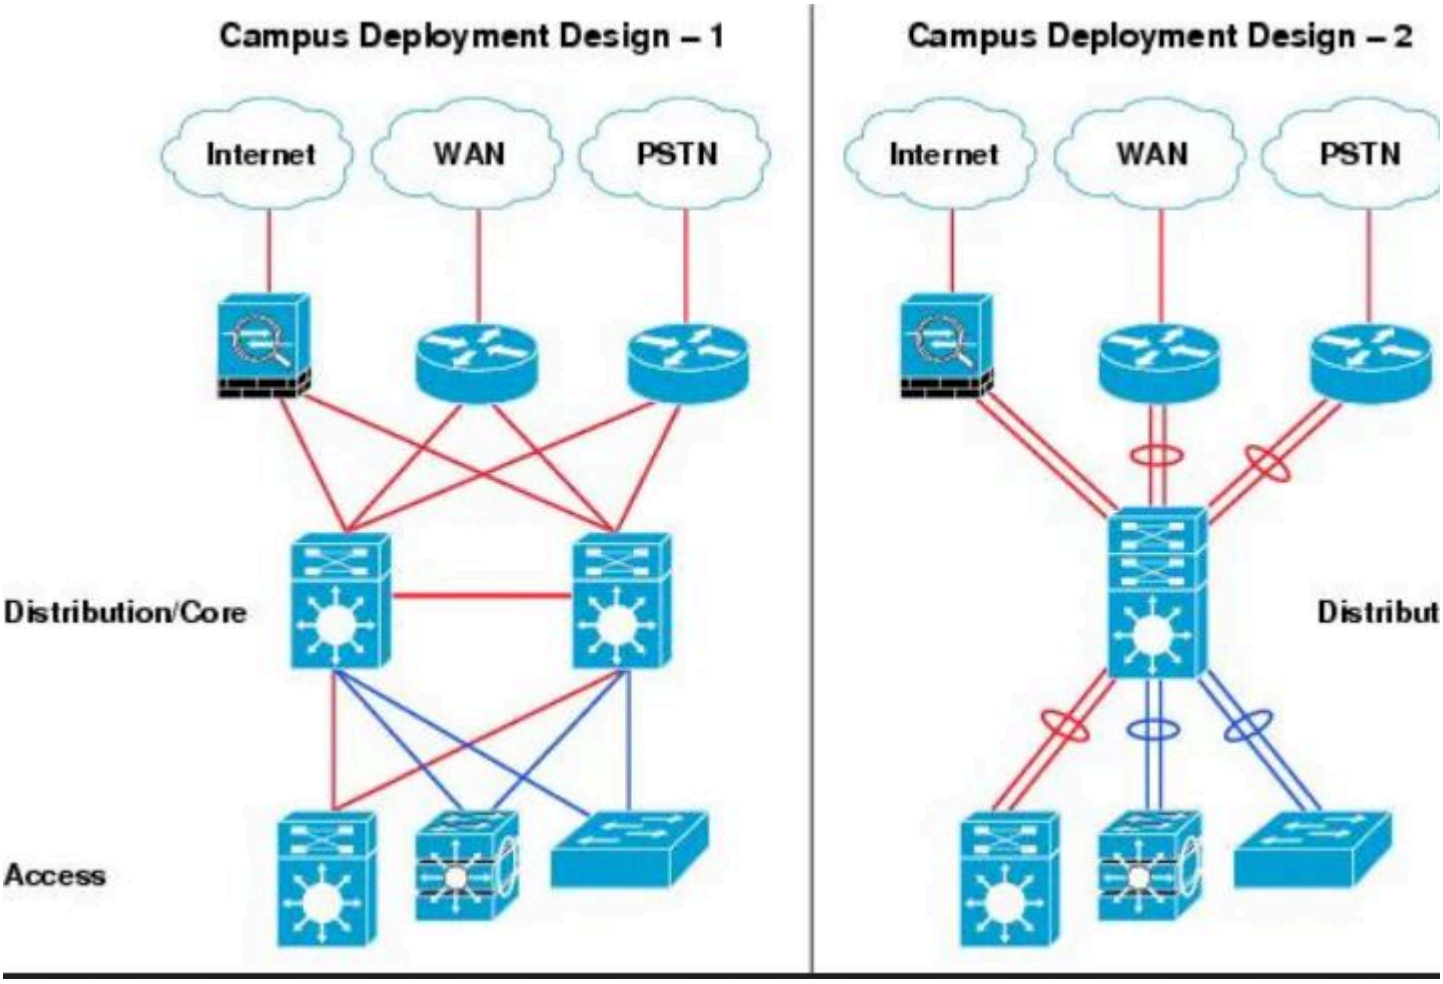

Question 6

Refer to the exhibit.



Webserver
172.16.1.2

interface Ethernet0
A
B

interface Serial0
C
D
E
F

access-list 1 permit 172.16.1.0 0.0.0.255

An engineer is configuring the router to provide static NAT for the webserver. Drag and drop the configuration commands from the left onto the letters that correspond to its position in the configuration on the right.

position A ip address 172.16.1.1 255.255.255.0 ✔

position B ip nat inside ✔

position C ip address 45.83.2.214 255.255.255.240 ✔
position D ip nat outside ✔
position E ip nat inside source static tcp 172.16.1.2 80 45.83.2.214 80 extendable ✔
position F ip nat inside source list 1 interface s0 overload ✔

Explanation

+ position A: ip address 172.16.1.1 255.255.255.0
+ position B: ip nat inside
+ position C: ip address 45.83.2.214 255.255.255.240
+ position D: ip nat outside
+ position E: ip nat inside source static tcp 172.16.1.2 80 45.83.2.214 80 extendable
+ position F: ip nat inside source list 1 interface s0 overload

Question 7

Drag the IPv6 DNS record types from the left onto the description on the right.

Note: You just need to click on one of the boxes on the right to match it with the corresponding box on the left.

correlates a domain with its authoritative name servers	NS ✔
associates the domain serial number with its owner	SOA ✔
aliases one name to another	CNAME ✔
supports reverse name lookups	PTR ✔
correlates a host name with an IP address	AAAA ✔

Explanation

+ correlates a domain with its authoritative name servers: NS
+ associates the domain serial number with its owner: SOA
+ aliases one name to another: CNAME
+ supports reverse name lookups: PTR
+ correlates a host name with an IP address: AAAA

An **AAAA** record maps a domain name to the IP address (Version 6) of the computer hosting the domain. An AAAA record is used to find the IP address of a computer connected to the internet from a name. The AAAA record is conceptually similar to the A record, but it allows you to specify the IPv6 address of the server, rather than the IPv4. An example of AAAA is the 'www' of 9tut.com is pointed to 2001:0db8:aaaa:bbbb:cccc:dddd:eeee:ffff.

NS (name server) looks like a website URL, but instead of linking to a website, they link to the domain names authoritative nameservers. An example of a NS is 'ns1.9tut.com'.

The **Canonical Name record (CNAME)** tells anyone visiting that subdomain to use the same DNS records as another domain / subdomain. If you are already using an A or AAAA record for a subdomain you wouldn't use a CNAME. CNAME records must always point to another domain / subdomain, never directly to an IP address. For example, we can configure the CNAME of www.9tut.com points to 9tut.com so that they use the same IP address.

As opposed to forward DNS resolution (A and AAAA DNS records), the **Reverse-lookup Pointer** (PTR) record is used to look up domain names based on an IP address.

An **SOA** record or start of authority record specifies the DNS server providing authoritative information about an Internet domain, the email of the domain administrator, the domain serial number, and several timers relating to refreshing the zone.

An example of a SOA record is shown below.

```
; name TTL class rr Nameserver email-address
mydomain.com. 14400 IN SOA ns.mynameserver.com. root.ns.mynameserver.com. (
2004123001 ; Serial number
86000 ; Refresh rate in seconds
7200 ; Update Retry in seconds
3600000 ; Expiry in seconds
600 ; minimum in seconds )
```

name – mydomain.com is the main name in this zone.

TTL – 14400 – TTL defines the duration in seconds that the record may be cached by client side programs. If it is set as 0, it indicates that the record should not be cached. The range is defined to be between 0 to 2147483647 (close to 68 years !) .

Class – IN – The class shows the type of record. IN equates to Internet. Other options are all historic. So as long as your DNS is on the Internet or Intranet, you must use IN.

Nameserver – ns.nameserver.com. – The nameserver is the server which holds the zone files. It can be either an external server in which case, the entire domain name must be specified followed by a dot. In case it is defined in this zone file, then it can be written as “ns” .
Email address – root.ns.nameserver.com. – This is the email of the domain name administrator. Now, this is really confusing, because people expect an @ to be in an email address. However in this case, email is sent to root@ns.nameserver.com, but written as root.ns.nameserver.com . And yes, remember to put the dot behind the domain name.

Serial number – 2004123001 – This is a sort of a revision numbering system to show the changes made to the DNS Zone. This number has to increment , whenever any change is made to the Zone file. The standard convention is to use the date of update YYYYMMDDnn, where nn is a revision number in case more than one updates are done in a day. So if the first update done today would be 2005301200 and second update would be 2005301201.

Refresh – 86000 – This is time(in seconds) when the slave DNS server will refresh from the master. This value represents how often a secondary will poll the primary server to see if the serial number for the zone has increased (so it knows to request a new copy of the data for the zone). It can be written as “23h88M” indicating 23 hours and 88 minutes. If you have a regular Internet server, you can keep it between 6 to 24 hours.

Retry – 7200 – Now assume that a slave tried to contact the master server and failed to contact it because it was down. The Retry value (time in seconds) will tell it when to get back. This value is not very important and can be a fraction of the refresh value.

Expiry – 3600000 – This is the time (in seconds) that a slave server will keep a cached zone file as valid, if it can’t contact the primary server. If this value were set to say 2 weeks (in seconds), what it means is that a slave would still be able to give out domain information from its cached zone file for 2 weeks, without anyone knowing the difference. The recommended value is between 2 to 4 weeks.

Minimum – 600 – This is the default time(in seconds) that the slave servers should cache the Zone file. This is the most important time field in the SOA Record. If your DNS information keeps changing, keep it down to a day or less. Otherwise if your DNS record doesn’t change regularly, step it up between 1 to 5 days. The benefit of keeping this value high, is that your website speeds increase drastically as a result of reduced lookups. Caching servers around the globe would cache your records and this improves site performance.

Question 8

Drag and drop the DHCP snooping terms from the left onto the descriptions on the right.

Note: You just need to click on one of the boxes on the right to match it with the corresponding box on the left.

list of hosts on the network that are unknown to the administrative domain	snooping binding database ✔
unknown DHCP server within an administrative domain	spurious DHCP server ✔
network component that propagates IP addresses to hosts on the network	DHCP server ✔
default state of all interfaces	untrusted ✔
internal device under the control of the network administrator	trusted ✔

Explanation

+ list of hosts on the network that are unknown to the administrative domain: snooping binding database
+ unknown DHCP server within an administrative domain: spurious DHCP server
+ network component that propagates IP addresses to hosts on the network: DHCP server
+ default state of all interfaces: untrusted
+ internal device under the control of the network administrator: trusted

Comments (10) Comments

1. giampod
   March 6th, 2021

   In drag question there are not solutions when there are wrong answers, only explanation, no good

2. Q5 explain please
   May 6th, 2021

   Correct seq. For someone learning would be great

3. Phil
   June 13th, 2021

   Please put explanation for the NAT question.

4. MalwarE
   June 16th, 2021

   9tut,

   Please provide the correct asnwers as most of them are missing?

   Thank you in advance!

5. Steve
   September 27th, 2021

   I’m confused by this question. Are the letters “A-F” supposed to be on the diagram somewhere…?

   An engineer is configuring the router to provide static NAT for the webserver. Drag and drop the configuration commands from the left onto the letters that correspond to its position in the configuration on the right.

6. Jacob B
   April 20th, 2022

Done

7. Anonymous
   March 13th, 2023

   what is the point of configuring “switchport port-security violation shutdown” if shutdown is the default state ? I inserted the sticky comand because I was confused.

8. zxcv lee
   January 13th, 2024

   @9tut,
   For question 6, can E and F be interchanged?

9. supi
   February 19th, 2024

   :-)

10. Xmerlyn
    May 12th, 2026

    On question 8 I did answer in ascending order. The quiz marked me incorrect and posted the same answer but did not use ascending order.. See below….
    Question 8

    An engineer is tasked to configure a switch with port security to ensure devices that forward unicasts, multicasts, and broadcasts are unable to flood the port. The port must be configured to permit only two random MAC addresses at a time. Drag and drop the required configuration commands from the left onto the sequence on the right. (Not all commands are used)

    Note: Please type the four numbers into the box below to match them with sequence 1 to 4. For example: 2451.

    Please type your answer here: 1267 (correct answer: 1276)Wrong
    I got it right, it did reverse the order on the second section.

Add a Comment

Name

Submit Comment

Subscribe to comments feed

Access-list Questions AAA Questions

Premium Member Zone

Welcome Darène MAYISSA!

- Welcome Premium Member!
- CCNA - New Questions Part 5
- CCNA - New Questions Part 6
- CCNA - New Questions Part 7

- CCNA - New Questions Part 8
- CCNA - New Questions Part 9
- CCNA - New Questions Part 10
- CCNA - New Questions Part 11
- CCNA - New Questions Part 12
- CCNA - New Questions Part 13
- CCNA - New Questions Part 14
- CCNA - New Questions Part 15
- CCNA - New Questions Part 16
- Composite Quizzes
- === New CCNA v1.1 Lab Sims (very important) ===
- Voice VLAN Configuration Sim 2
- Voice VLAN & LLDP Sim
- Allowed, Native VLAN & LACP Sim
- Static Routing Configuration Sim 4
- IPv4 and IPv6 Connectivity Sim
- VLAN & CDP Sim 2
- IPv4 and IPv6 Assignment Sim
- VLAN CDP & LLDP Sim
- OSPF Configuration Sim 2
- OSPF Configuration Sim 3
- Trunking & LACP Sim
- VLAN Configuration Sim
- Allowed, Native VLAN & LACP Sim 2
- 802.1Q Trunking & LACP
- IPv4 and IPv6 Assignment Sim 2
- 802.1Q Trunking, Native VLAN & LACP
- Static Routing Configuration Sim 5
- Static Routing Configuration Sim 6
- PAT, NTP & DHCP Relay Sim
- OSPF DR Sim
- NACL DHCP Snooping 3
- NAT DHCP SSH Sim
- ==== Lab Sims for CCNA (although they are rather old but please learn all of them too) ====
- IP Services Sim Version 2
- OSPF Configuration Sim
- LACP Configuration Sim
- Voice VLAN Configuration Sim
- VLAN and Trunking Configuration Sim
- Named Access-list & Port Security Sim
- Named Access-list & DHCP Snooping Sim
- VLAN and CDP Sim
- IPv4 and IPv6 Deployment Sim
- Static Routing Configuration Sim 3
- VLAN & LLDP Sim
- IPv6 Static Routing Sim
- Named Access-list & DHCP Snooping Sim 2
- ISL Trunking and LACP Sim
- === Below Sims are old and retired so you do not need to learn them ===
- Static Routing Configuration Sim 2
- IP Services Sim
- Static Routing Configuration Sim

CCNA Training

- CCNA Knowledge
- CCNA Tutorials, Practice Labs & Lab Challenges

- Spine-Leaf Architecture Tutorial
- Generative AI vs Predictive AI Tutorial
- REST API Tutorial
- Network Time Protocol (NTP) Tutorial
- DHCP Snooping Tutorial
- What is SDN?
- How a router makes a forwarding decision
- Configure SSH for Remote Access on Cisco Router
- Key Security Concepts Tutorial
- Forwarding per-hop behavior (PHB) for QoS Tutorial
- Port Security Tutorial
- Puppet Tutorial
- Chef Tutorial
- Ansible Tutorial
- JSON Tutorial
- Layer 2 Threats and Security Features
- AAA TACACS+ and RADIUS Tutorial
- STP Root Port Election Tutorial
- TCP and UDP Tutorial
- WAN Tutorial
- DHCP Tutorial
- Simple Network Management Protocol SNMP Tutorial
- Syslog Tutorial
- EtherChannel Tutorial
- Hot Standby Router Protocol HSRP Tutorial
- InterVLAN Routing Tutorial
- Cisco Command Line Interface CLI
- Cisco Router Boot Sequence Tutorial
- OSI Model Tutorial
- Subnetting Tutorial – Subnetting Made Easy
- Frame Relay Tutorial
- Wireless Tutorial
- Virtual Local Area Network VLAN Tutorial
- VLAN Trunking Protocol VTP Tutorial
- IPv6 Tutorial
- Rapid Spanning Tree Protocol RSTP Tutorial
- Spanning Tree Protocol STP Tutorial
- Network Address Translation NAT Tutorial
- Access List Tutorial
- RIP Tutorial
- EIGRP Tutorial
- OSPF Tutorial
- Practice CCNA GNS3 Labs
- CCNA Lab Challenges

CCNA 200-301

- CCNA FAQs & Tips
- Basic Questions
- Topology Architecture Questions
- Cloud & Virtualization Questions
- CDP & LLDP Questions
- Switch Questions
- VLAN & Trunking Questions
- VLAN & Trunking Questions 2

- STP & VTP Questions
- EtherChannel Questions
- TCP & UDP Questions
- IP Address & Subnetting Questions
- IP Routing Questions
- IP Routing Questions 2
- OSPF Questions
- OSPF Questions 2
- EIGRP Questions
- NAT Questions
- NTP Questions
- Syslog Questions
- HSRP Questions
- Access-list Questions
- AAA Questions
- Security Questions
- Security Questions 2
- DAI Questions
- IPv6 Questions
- DNS Questions
- QoS Questions
- Port Security Questions
- Wireless Questions
- Wireless Questions 2
- SDN Questions
- DNA Center Questions
- Drag Drop Questions
- Drag Drop Questions 2
- Drag Drop Questions 3
- VPN Questions
- DHCP Questions
- Automation Questions
- Miscellaneous Questions
- Share your CCNA Experience

Network Resources

- Free Router Simulators
- CCNA Website
- ENCOR Website
- ENSDWI Website
- ENARSI Website
- DevNet Website
- CCIE R&S Website
- Security Website
- Wireless Website
- Design Website

- Data Center Website
- Service Provider Website
- Collaboration Website

Top



Copyright © 2014 - 2026 CCNA Training
Privacy Policy | Disclaimer | Contact Us