Miscellaneous Questions

8 questions | Original English questions and source answers

Question 1

Which technology must be implemented to configure network device monitoring with the highest security?

Options

A. SNMPv3

B. NetFlow

C. syslog

D. IP SLA

Answer

A. SNMPv3

Source explanation

SNMPv3—The most up-to-date protocol focuses on security. SNMPv3 defines a security model, user-based security model (USM), and a view-based access control model (VACM). SNMPv3 USM provides data integrity, data origin authentication, message replay protection, and protection against disclosure of the message payload.

Reference: https://www.juniper.net/documentation/us/en/software/junos/network-mgmt/topics/topic-map/network-monitoring-by-using-snmp.html

Source: CCNA 200-301 Questions.html | Question 1

Question 2

Which command can you enter to allow Telnet to be supported in addition to SSH?

Options

A. transport input telnet

B. transport input telnet ssh

C. privilege level 15

D. `no transport input telnet`

Answer

B. transport input telnet ssh

Source: CCNA 200-301 Questions.html | Question 2

Question 3

What are two differences between optical-fiber cabling and copper cabling? (Choose two)

Options

A. The glass core component is encased in a cladding

B. The data can pass through the cladding

C. Fiber connects to physical interfaces using RJ-45 connections

D. A BNC connector is used for fiber connections

E. Light is transmitted through the core of the fiber

Answer

A. The glass core component is encased in a cladding

E. Light is transmitted through the core of the fiber


Source explanation

The two main elements of an optical fiber are its core and cladding. The “core”, or the axial part of the optical fiber made of silica glass, is the light transmission area of the fiber. It may sometimes be treated with a “doping” element to change its refractive index and therefore the velocity of light down the fiber.

The “cladding” is the layer completely surrounding the core.
CoatingCladdingCore
Reference: https://www.cisco.com/c/en/us/products/collateral/interfaces-modules/transceiver-modules/white_paper_c11-463661.html

The two main elements of an optical fiber are its core and cladding. The “core”, or the axial part of the optical fiber made of silica glass, is the light transmission area of the fiber. It may sometimes be treated with a “doping” element to change its refractive index and therefore the velocity of light down the fiber.

The “cladding” is the layer completely surrounding the core.

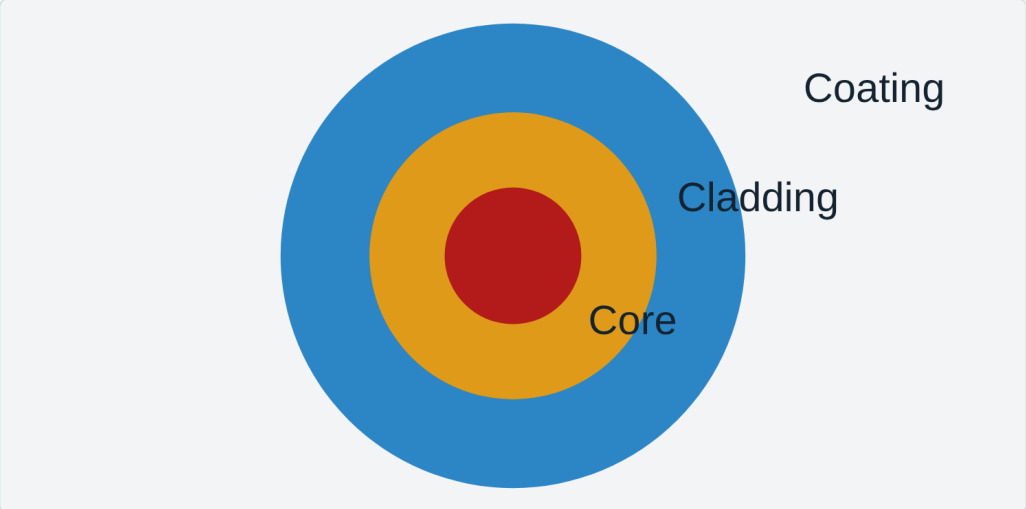

Reference: https://www.cisco.com/c/en/us/products/collateral/interfaces-modules/transceiver-modules/white_paper_c11-463661.html

Source: CCNA 200-301 Questions.html | Question 3

Question 4

A device detects two stations transmitting frames at the same time. This condition occurs after the first 64 bytes of the frame is received interface counter increments?

Options

A. CRC

B. runt

C. late collision

D. collision

Answer

C. late collision

Source explanation

A late collision is defined as any collision that occurs after the first 512 bits (or 64th byte) of the frame have been transmitted. The usual possible causes are full-duplex/half-duplex mismatch, exceeded Ethernet cable length limits, or defective hardware such as incorrect cabling, non-compliant number of hubs in the network, or a bad NIC.

Late collisions should never occur in a properly designed Ethernet network. They usually occur when Ethernet cables are too long or when there are too many repeaters in the network.

Reference: https://www.cisco.com/en/US/docs/internetworking/troubleshooting/guide/tr1904.html

Source: CCNA 200-301 Questions.html | Question 4

Question 5

A network engineer must back up 20 network router configurations globally within a customer environment. Which protocol allows the engineer to perform this function using the copy function?

Options

A. SNMP

B. SMTP

C. COP

D. ARP

Answer

A. SNMP

Source explanation

SNMP is an application-layer protocol that provides a message format for communication between SNMP managers and agents. SNMP provides a standardized framework and a common language used for the monitoring and management of devices in a network.
The SNMP framework has three parts:
+ An SNMP manager
+ An SNMP agent
+ A Management Information Base (MIB)

The Management Information Base (MIB) is a virtual information storage area for network management information, which consists of collections of managed objects.

With SNMP, the network administrator can send commands to multiple routers to do the backup.

Source: CCNA 200-301 Questions.html | Question 5

Question 6

A network analyst is tasked with configuring the date and time on a router using EXEC mode. The date must be set to January 1,2020 and the time must be set to 12:00 am. Which command should be used?

Options

A. clock timezone

B. clock set

C. clock summer-time date

D. clock summer-time recurring

Answer

B. clock set

Source explanation

In this example, the clock time is set to 12:00 am with the clock date of January 1,2020.

R1#clock set 12:00:00 jan 1 2020

Source: CCNA 200-301 Questions.html | Question 6

Question 7

A Cisco IP phone receive untagged data traffic from an attached PC. Which action is taken by the phone?

Options

A. It allows the traffic to pass through unchanged

B. It tags the traffic with the default VLAN

C. It drops the traffic

D. It tags the traffic with the native VLAN

Answer

A. It allows the traffic to pass through unchanged

Source explanation

Untagged traffic from the device attached to the Cisco IP Phone passes through the phone unchanged, regardless of the trust state of the access port on the phone.

Reference: https://www.cisco.com/c/en/us/td/docs/switches/lan/catalyst2960/software/release/12-2_40_se/configuration/guide/scg/swvoip.pdf

Source: CCNA 200-301 Questions.html | Question 7

Question 8

Which function does an SNMP agent perform?

Options

A. It coordinates user authentication between a network device and a TACACS+ or RADIUS server

B. It requests information from remote network nodes about catastrophic system events.

C. It manages routing between Layer 3 devices in a network

D. It sends information about MIB variables in response to requests from the NMS

Answer

D. It sends information about MIB variables in response to requests from the NMS

Source: CCNA 200-301 Questions.html | Question 8