

CH: CHEMICAL ENGINEERING

EE25BTECH11042 - Nipun Dasari

1) The direction of largest increase of the function $xy^3 - x^2$ the point (1, 1) is -

- a) $3\hat{i} + 4\hat{j}$ b) $3\hat{i} + 4\hat{j}$ c) $3\hat{i} + 4\hat{j}$ d) $3\hat{i} + 4\hat{j}$

GATE CH2009

2) The modulus of the complex number is $(1 + i)/\sqrt{2}$

- a) $1/2$ b) $1/\sqrt{2}$ c) 1 d) $\sqrt{2}$


GATE CH2009

3) The system of linear equations $\mathbf{Ax} = \mathbf{0}$, where \mathbf{A} is an $n \times n$ matrix, has a non-trivial solution ONLY if-

- a) rank of $\mathbf{A} > n$ c) rank of $\mathbf{A} < n$
b) rank of $\mathbf{A} = n$ d) \mathbf{A} is an identity matrix

GATE CH2009

4) A dehumidifier (shown below) is used to completely remove water vapour from air

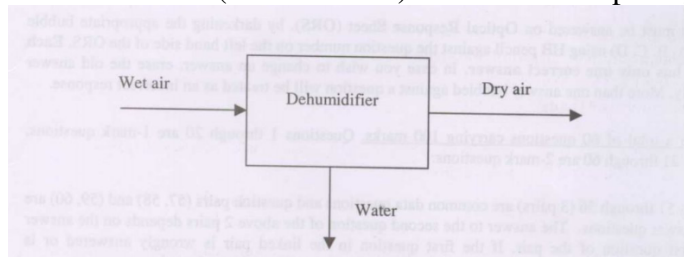

Which **ONE** of the following statements is **TRUE**

- a) Water is the **ONLY** tie component
b) Air is the **ONLY** tie component
c) **BOTH** water and air are tie components
d) There are **NO** tie components

GATE CH2009

5) Dehydrogenation of ethane, $H_6(g) \rightarrow H_4(g) + H_2(g)$, is carried out in a continuous stirred tank reactor (CSTR). The feed is pure ethane. If the reactor exit stream contains unconverted ethane along with the products, then the number of degrees of freedom for the CSTR is

- a) 1 b) 2 c) 3 d) 4

GATE CH2009

6) An ideal gas at temperature T_1 and pressure P_1 is compressed isothermally to pressure $P_2 (> P_1)$ in a closed system. Which **ONE** of the following is **TRUE** for internal energy (U) and Gibbs free energy (G) of the gas at the two states?

- a) $U_1 = U_2, G_1 \neq G_2$
 b) $U_1 \neq U_2, G_1 \neq G_2$

- c) $U_1 \neq U_2, G_1 = G_2$
 d) $U_1 \neq U_2, G_1 \neq G_2$

GATE CH2009

7) Under fully turbulent flow conditions, the frictional pressure drop across a packed bed varies with the superficial velocity (V) of the fluid as -

- a) V^{-1} b) V c) $V^{3/2}$ d) V^2

GATE CH2009

8) For a mixing tank operating in the laminar regime, the power number varies with the Reynolds number (Re) as

- a) $Re^{-1/2}$ b) $Re^{1/2}$ c) Re d) Re^{-1}

GATE CH2009

9) During the transient convective cooling of a solid object, Biot number $\rightarrow 0$ indicates

- a) uniform temperature throughout the object
 b) negligible convection at surface of the object
 c) significant thermal resistance within the object
 d) significant temperature gradient within the object

GATE CH2009

10) The Prandtl number of a fluid is the ratio of

- a) thermal diffusivity to momentum diffusivity
 b) momentum diffusivity to thermal diffusivity
 c) conductive resistance to convective resistance
 d) thermal diffusivity to kinematic viscosity

GATE CH2009

11) According to the penetration theory of mass transfer, the mass transfer coefficient (k) varies with diffusion coefficient (D) of the diffusing species as

- a) D b) $D^{-1/2}$ c) $D^{1/2}$ d) $D^{3/2}$

GATE CH2009

12) The ratio of the liquid to gas flow rate in a counter-current gas absorption column is increased, at otherwise identical conditions. Which ONE of the following statements is TRUE ?

- a) The operating line shifts towards the equilibrium curve
 b) The operating line shifts away from the equilibrium curve
 c) The concentration of the absorbed species increases in the exit liquid stream
 d) The operating line does not shift

GATE CH2009

13) For a homogeneous reaction system, where

C_j is the concentration of j at time t N_j is the number of moles of j at time t V is the reaction volume at time t t is the reaction time The rate of reaction for species j is defined as

- a) $\frac{dC_j}{dt}$ b) $-\frac{dC_j}{dt}$ c) $\frac{1}{V} \frac{dN_j}{dt}$ d) $-\frac{1}{V} \frac{dN_j}{dt}$

GATE CH2009

14) The half-life of a first order liquid phase reaction is 30 seconds. Then the rate constant, in min^{-1} , is

- a) 0.0231

- b) 0.602
- c) 1.386
- d) 2.0

GATE CH2009

15) For a solid catalyzed reaction, the Thiele modulus is proportional to

- a) $\sqrt{\frac{\text{intrinsic:reactionrate}}{\text{diffusion:rate}}}$
- b) $\sqrt{\frac{\text{diffusion:rate}}{\text{intrinsic:reactionrate}}}$
- c) $\frac{\text{intrinsic:reactionrate}}{\text{diffusion:rate}}$
- d) $\frac{\text{diffusion:rate}}{\text{intrinsic:reactionrate}}$

GATE CH2009

16) Which ONE of the following sensors is used for the measurement of temperature in a combustion process ($T > 1800^\circ\text{C}$) ?

- a) Type J thermocouple
- b) Thermistor
- c) Resistance temperature detector
- d) Pyrometer

GATE CH2009

17) The roots of the characteristic equation of an underdamped second order system are

- a) real, negative and equal
- b) real, negative and unequal
- c) real, positive and unequal
- d) complex conjugates

GATE CH2009

18) The total fixed cost of a chemical plant is Rs. 10.0 lakhs; the internal rate of return is 15 per cent and annual operating cost is rs. 2.0 lakhs. The annualised cost of plant is

- a) 1.8
- b) 2.6
- c) 3.5
- d) 4.3

GATE CH2009

19) In petroleum refining operations, the process used for converting paraffins and naphthenes to aromatics is

- a) catalytic reforming
- b) catalytic cracking
- c) hydrocracking
- d) alkylation

GATE CH2009

20) The active component of catalysts used in steam reforming of methane to produce synthesis gas is

- a) Nickel
- b) Iron
- c) Platinum
- d) Palladium

GATE CH2009

21) The value of the limit

- a) $-\infty$
 - b) 0
 - c) 1
 - d) ∞
- $$\lim_{x \rightarrow \pi/2} \frac{\cos x}{(x - \pi/2)^3}$$

GATE CH2009

22) The general solution of the differential equation

$$\frac{d^2y}{dx^2} - \frac{dy}{dx} - 6y = 0$$

, with C_1 and as constants of integration, is

- a) $C_1 e^{-3x} + C_2 e^{-2x}$ c) $C_1 e^3 x + C_2 e^2 x$
 b) $C_1 e^3 x + C_2 e^{-2x}$ d) $C_1 e^{-3x} + C_2 e^2 x$

GATE CH2009

23) Using the residue theorem, the value of integral (counterclockwise)

$$\oint \frac{8-7z}{z-4} dz$$

around a circle with centre at $z=0$ and radius=8 (where z is a complex number and $i = \sqrt{-1}$), is

- a) -20π b) -40π c) $-40\pi i$ d) $40\pi i$

GATE CH2009

24) Consider the integral $\iint (2xi - 2yj + 5zk) \cdot n \, dS$ over the surface of a sphere of radius = 3 with center at the origin and surface unit normal n pointing away from the origin. Using the Gauss divergence theorem, the value of the integral is

- a) -180π b) 0 c) 90π d) 180π

GATE CH2009

25) Using the trapezoidal rule and 4 equal intervals ($n = 4$), the calculated value of the integral (rounded to the first decimal place) is

- a) 1.7 b) 1.9 c) 2.0 d) 2.1

GATE CH2009

26) The eigenvalues of matrix $A = \begin{bmatrix} 1 & 2 \\ 4 & 3 \end{bmatrix}$ are 5 and -1. Then the eigenvalues of $-2A+3I$ (I is 2×2 identity matrix) are

- a) -7 and 5 b) 7 and -5 c) -1/7 and 1/5 d) 1/7 and -1/5


GATE CH2009

27) A fair die is rolled. Let R denote the event of obtaining a number less than or equal to 5 and S denote the event of obtaining an odd number. Then which ONE of the following about the probability (P) is TRUE ?

- a) $P(R/S) = 1$ b) $P(R/S) = 0$ c) $P(S/R) = 1$ d) $P(S/R) = 0$

GATE CH2009

28) Pure water (stream W) is to be obtained from a feed containing 5 wt per cent salt using a desalination unit as shown below

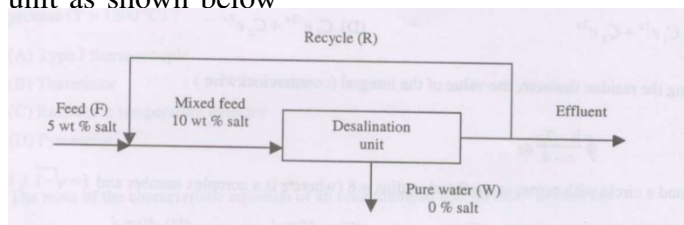

If the overall recovery of pure water (through stream W) is 0.75 kg/kg feed, then the recycle ratio (R/F) is

- a) 0.25 b) 0.5 c) 0.75 d) 1.0


GATE CH2009

29) For a binary mixture at constant temperature and pressure, which ONE of the following relations between activity coefficient γ and mole fraction χ is thermodynamically consistent ?

- a) $\ln \gamma_1 = -1 + 2\chi_1 - \chi_1^2$, $\ln \gamma_2 = \frac{1}{2} \chi_1^2$
 b) $\ln \gamma_1 = -1 + \chi_1 - \chi_1^2$, $\ln \gamma_2 = \chi_1^2$
 c) $\ln \gamma_1 = -1 + \chi_1 - \chi_1^2$, $\ln \gamma_2 = -\frac{1}{2} \chi_1^2$
 d) $\ln \gamma_1 = -1 + \chi_1 - \chi_1^2$, $\ln \gamma_2 = -\chi_1^2$

GATE CH2009

30) Two identical reservoirs, open at the top, are drained through pipes attached to the bottom of the tanks as shown below. The two drain pipes are of the same length, but of different diameters $D_1 > D_2$

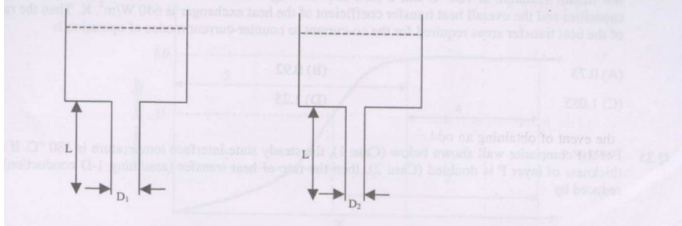

Assuming the flow to be steady and laminar in both drain pipes, if the volumetric flow rate in the larger pipe is 16 times of that in the smaller pipe, the ratio D_1/D_2 is

- a) 2 b) 4 c) 8 d) 16

GATE CH2009

31) For an incompressible flow, the x- and y-components of the velocity vector are $v_y = 3(y + z)$, $v_x = 2(x + y)$ where x, y, z are in metres and velocities are in m/s. Then the z-component of the velocity vector (v_z) of the flow for the boundary condition $v_z = 0$ at $z = 0$ is

- a) $5z$ b) $-5z$ c) $2x + 3z$ d) $-2x - 3z$


GATE CH2009

32) The terminal settling velocity mm diameter glass sphere (density: 2500 kg / m^3) in a viscous Newtonian liquid (density: 1500 kg / m^3) is 100 s / mu m/s . If the particle Reynolds small and the value of acceleration due to gravity is 9.81 m / s^2 the viscosity of the liquid (in Pa.s) is

- a) 100 b) 196.2 c) 245.3 d) 490.5

GATE CH2009

33) A well-insulated hemispherical furnace (radius = 1m) is shown below:

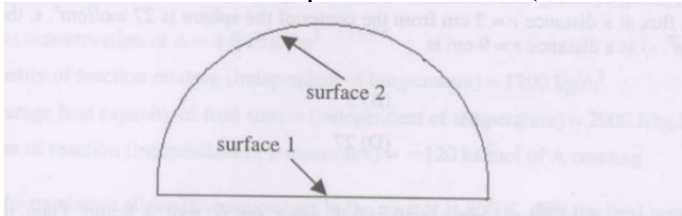


The self-view factor of radiation for the curved surface 2 is

- a) $1/4$ b) $1/2$ c) $2/3$ d) $3/4$

GATE CH2009

GATE CH2009

- 35) For the composite wall shown below (*Case1*), the steady state interface temperature is 180°C . If the thickness of layer P is doubled (*Case2*), then the rate of heat transfer (assuming 1-D conduction) is reduced by _____.

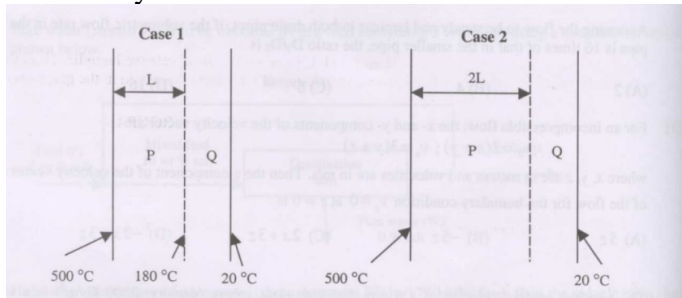

- a) 20%
b) 40%
- c) 50%
d) 70%

GATE CH2009

- 36) Species A is diffusing at steady state from the surface of a sphere (radius = 1cm) into a stagnant fluid. If the diffusive flux at a distance $r = 3$ cm from the center of the sphere is $27 \text{ mol} / \text{cm}^2 \cdot \text{s}$, the diffusive flux (in $\text{mol} / \text{cm}^2 \cdot \text{s}$) at a distance $r = 9$ cm is

- a) 1 c) 9
b) 3 d) 27


GATE CH2009

- 37) The feed to a binary distillation column has 40 mol % vapor and 60 mol % liquid. Then, the slope of the q-line in the McCabe-Thiele plot is

- a) -1.5 b) -0.6 c) 0.6 d) 1.5

GATE CH2009

- 38) The equilibrium moisture curve for a solid is shown below:

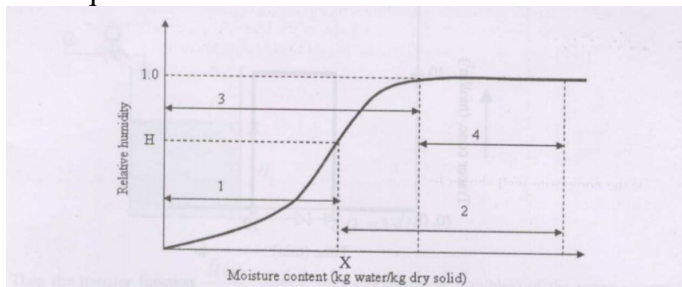

The total moisture content of the solid is X and it is exposed to air of relative humidity H . In the table below. Group I lists the types of moisture, and Group II represents the region in the graph above.

	GROUP I	GROUP II
P.	Equilibrium moisture	1
Q.	Bound moisture	2
R.	Unbound moisture	3
S.	Free moisture	4

- a) P-1, Q-2, R-3, S-4 c) P-1, Q-4, R-2, S-3
b) P-1, Q-3, R-4, S-2 d) P-1, Q-2, R-4, S-3

GATE CH2009

39) The liquid-phase reaction $A \rightarrow B$ is conducted in an adiabatic plug flow reactor.


Data:

- a) Inlet concentration of A = 4.0 kmol/m^3
b) Density of reaction mixture (independent of temperature) = 1200 kg/m^3 Average heat capacity of feed stream (independent of temperature) = 2000 J/kg.K
c) Heat of reaction (independent of temperature) 120 kJ/mol of A reacting
d) If the maximum allowable temperature in the reactor is 800 K , then the feed temperature (in K) should not exceed

- a) 400 c) 600
b) 500 d) 700

GATE CH2009

40) An isothermal pulse test is conducted on a reactor and the variation of the outlet tracer concentration with time is shown below:

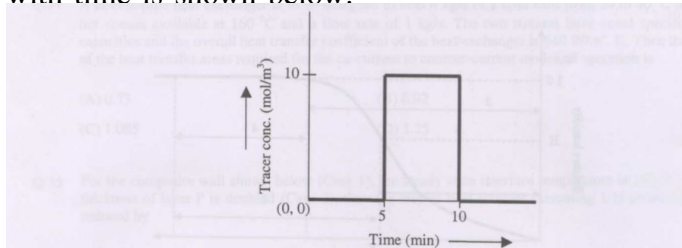

The mean residence time of the fluid in the reactor (in minutes) is

- a) 5.0 c) 10.0
b) 7.5 d) 15.0

GATE CH2009

41) The inverse Laplace transform of is $\frac{1}{2s^2+3s+1}$

- a) $e^{-\frac{t}{2}} - e^{-t}$ c) $e^{-\frac{t}{2}} - 2e^{-t}$
b) $2e^{-\frac{t}{2}} - e^{-t}$ d) $e^{-\frac{t}{2}} - e^{-t}$

GATE CH2009

42) The characteristic of a closed loop system using a proportional controller with gain K_c is


$$12s^3 + 19s^2 + 8s + 1 + K_c = 0$$

At the onset of instability, the value of K_c is

- a) 35/3 b) 10 c) 25/3 d) 20/3

GATE CH2009


43) The block diagram for a control system is shown below:



For a unit step change in the set point, $R(s)$ the steady state offset in the output $Y(s)$ is

- a) 0.2 b) 0.3 c) 0.4 d) 0.5

44) For a tank of cross-sectional area 100cm^2 and inlet flow rate (Q_i in cm^3/s), the outlet flow rate (Q_o in cm^3/s) is related to the liquid height (H in cm as) $Q_o = 3\sqrt{H}$ (see figure below).

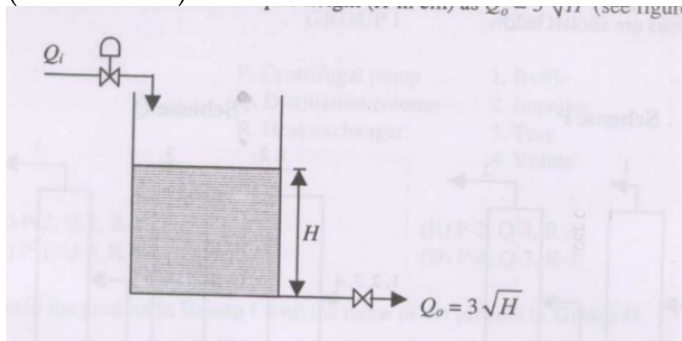

Then the transfer function $\frac{H(s)}{Q(s)}$ of the process around the steady-state point, $Q_{Lx} = 18\text{cm}^3/\text{s}$ and $H_x = 36\text{cm}$ is

- a) $\frac{1}{100s+1}$ c) $\frac{3}{300s+1}$
b) $\frac{2}{200s+1}$ d) $\frac{4}{400s+1}$


GATE CH2009

45) A column costs Rs. 5.0 lakhs and has a useful life of 10 years. Using the double declining balance depreciation method, the book value of the unit at the end of five years (in lakhs of Rs.) is

- a) 1.21 c) 1.64
b) 1.31 d) 2.05

GATE CH2009

46) An equi-molar mixture of four hydrocarbons (1, 2, 3, 4) is to be separated into high purity individual components using a sequence of simple distillation columns (one overhead and one bottom stream). Four possible schemes are shown below.

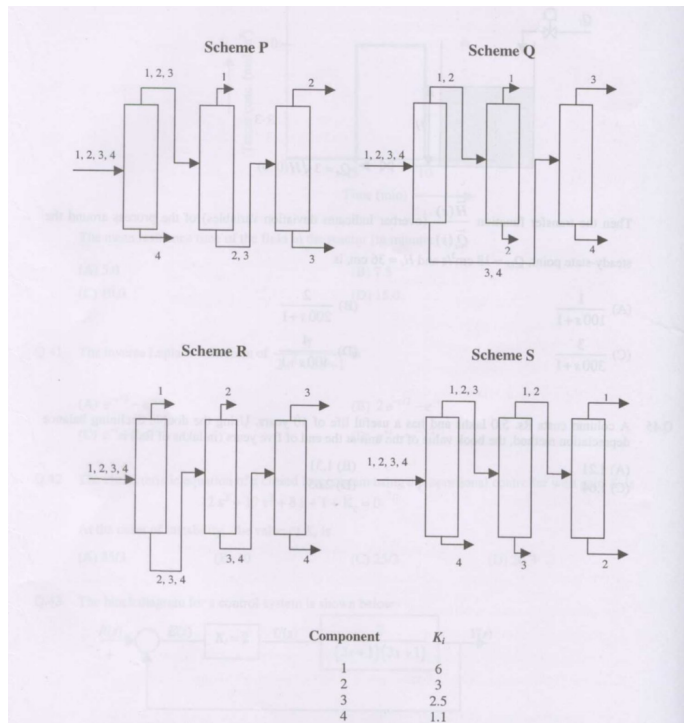

Component	K_i
1	6
2	3
3	2.5
4	1.1

- a) P b) Q c) R d) S

GATE CH2009

47) Match the equipment in Group I to the internals in Group II

GROUP I	GROUP II
P. Centrifugal Pump	1. Baffle
Q. Distillation column	2. Impeller
R. Heat exchanger	3. Tray
	4. Volute

- a) P-2, Q-1, R-4 c) P-1, Q-3, R-4
b) P-2, Q-4, R-3 d) P-4, Q-3, R-1

GATE CH2009

48) Match the product in Group I with the name of the process in Group II.

GROUP I	GROUP II
P. Sodium carbonate	1. Haber
Q. Ammonia	2. Solvay
R. Sulphuric acid	3. Fischer-Tropsch
	4. Contact

- a) P-2, Q-1, R-4 c) P-3, Q-4, R-2
b) P-4, Q-1, R-2 d) P-2, Q-1, R-3

GATE CH2009

49) Match the product in Group I to the raw material in Group II.

GROUP I		GROUP II	
P.	Ethylene	1.	Natural gas
Q.	Methanol	2.	Synthesis gas
R.	Phthalic anhydride	3.	Naphtha
		4.	Naphtalene

- a) P-1, Q-2, R-3
b) P-2, Q-1, R-4

- c) P-3, Q-1, R-4
d) P-3, Q-2, R-4

GATE CH2009

50) Match the unit process in Group I with the industry in Group II.

GROUP I		GROUP II	
P.	Steam cracking	1.	Petroleum refining
Q.	Hydrocracking	2.	Petrochemicals
R.	Condensation	3.	Polymers
		4.	Soaps and detergents

- a) P-1, Q-2, R-3
b) P-2, Q-3, R-3

- c) P-1, Q-2, R-4
d) P-2, Q-1, R-3

GATE CH2009

Common Data for Questions 51 and 52 An ideal gas with molar heat capacity $C_p = \frac{5}{2} \times R$ (where $R = 8.314 \text{ J/molK}$) is compressed adiabatically from 1 bar and 300 K to pressure P_2 in a closed system. The final temperature after compression is 600 K and the mechanical efficiency of compression is 50%.

51) The work required for compression (in kJ / mol) is

- a) 3.74 b) 6.24 c) 7.48 d) 12.48

GATE CH2009


52) The final pressure P_2 (in bar) is

- a) $2^{\frac{3}{4}}$ b) $2^{\frac{5}{4}}$ c) $2^{\frac{3}{2}}$ d) $2^{\frac{5}{2}}$

GATE CH2009

Common Data for questions 53 and 54

A slab of thickness L with one side ($x = 0$) insulated and the other side ($x = L$) maintained at a constant temperature T_0 is shown below.

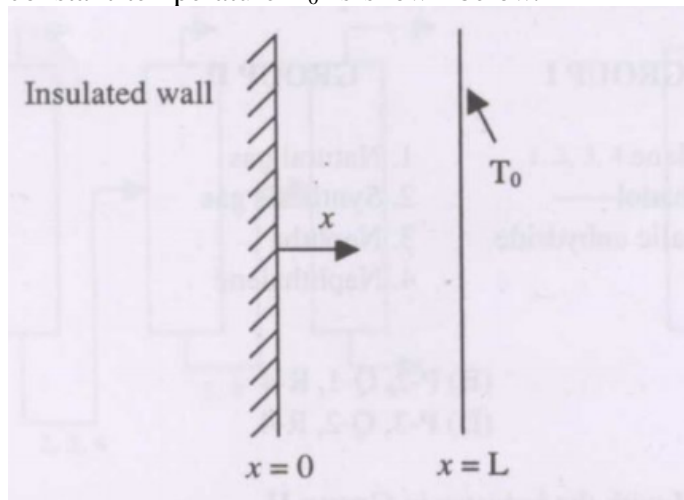

A uniformly distributed internal heat source produces heat in the slab at the rate of $S \text{ W} / \text{m}^3$. Assume the heat conduction to be steady and 1-D along the x -direction.

53) The maximum temperature in the slab occurs at x equal to

- a) 0 b) $L/4$ c) $L/2$ d) L

GATE CH2009


54) The heat flux at $x = L$ is

- a) 0 b) $S L/4$ c) $S L/2$ d) $S L$

GATE CH2009

Common Data for Questions 55 and 56 A flash distillation drum (see figure below) is used to separate a methanol-water mixture. The mole fraction of methanol in the feed is 0.5, and the feed flow rate is 1000 kmol/hr. The feed is preheated in a heater with heat duty Q and is subsequently flashed in the drum. The flash drum can be assumed to be an equilibrium stage, operating adiabatically. The equilibrium relation between the mole fractions of methanol in the vapor and liquid phases is y

= 4 x. The ratio of distillate to feed flow rate is 0.5.

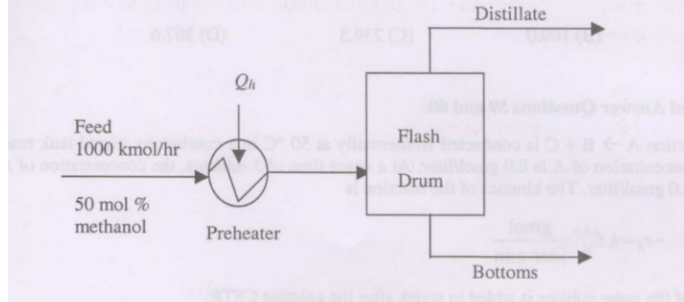

55) The mole fraction of methanol in the distillate is

- a) 0.2 b) 0.7 c) 0.8 d) 0.9

GATE CH2009


56) If the enthalpy of the distillate with reference to the feed is 3000 kJ/kmol, and the enthalpy of the bottoms with reference to the feed is -1000 kJ/kmol, the heat duty of the preheater (Q in kJ / hr) is

- a) -2×10^6 b) -1×10^6 c) 1×10^6 d) 2×10^6

GATE CH2009

Statement for Linked Answer Questions 57 and 58

A free jet of water is emerging from a nozzle (diameter 75 mm) attached to a pipe (diameter 225 mm) as shown below.

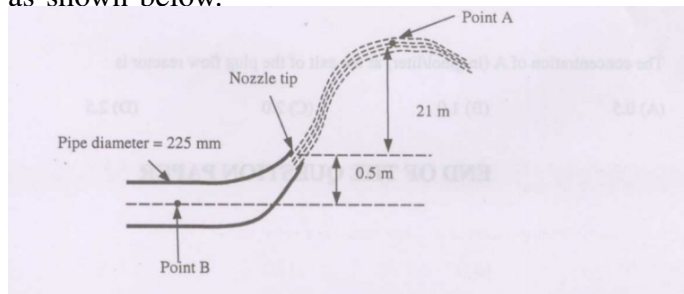

The velocity of water at point A is 18 m/s. Neglect friction in the pipe and nozzle. Use $g = 9.81 \text{ m/s}^2$ and density of water = 1000 kg/m^3 .

57) The velocity of water at the tip of the nozzle (in m / s) is

- a) 13.4 b) 18.0 c) 23.2 d) 27.1

GATE CH2009

58) The gauge pressure (in kPa) at point B is

- a) 80.0 b) 100.0 c) 239.3 d) 367.6

GATE CH2009

Statement for Linked Answer Questions 59 and 60

The liquid-phase reaction $A \rightarrow B + C$ is conducted isothermally at 50°C in a continuous stirred tank reactor (CSTR). The inlet concentration of A is 8.0 gmol/liter. At a space time of 5 minutes, the concentration of A at the exit of CSTR is 4.0 gmol/liter. The kinetics of the reaction is

$$-r_A = k^{0.5} C_A \frac{\text{gmol}}{\text{liter} \cdot \text{min}}$$

A plug flow reactor of the same volume is added in series after the existing CSTR.

59) The rate constant (k) for this reaction at 50°C is

a) $0.2 \left(\frac{\text{gmol}}{\text{liter}} \right)^{0.5} \text{min}^{-1}$

b) $0.2 \left(\frac{\text{gmol}}{\text{liter}} \right)^{0.5} \text{min}^{-1}$

c) $0.4 \left(\frac{\text{gmol}}{\text{liter}} \right)^{0.5} \text{min}^{-1}$

d) $0.4 \left(\frac{\text{gmol}}{\text{liter}} \right)^{0.5} \text{min}^{-1}$

GATE CH2009

60) The concentration of A (in gmol/liter) at the exit of the plug flow reactor is

a) 0.5

b) 1.0

c) 2.0

d) 2.5

GATE CH2009