Marwadi University Marwadi Chandarana Group NAAC A+	**Marwadi University** **Faculty of Engineering & Technology** **Department of Information and Communication Technology**	
Subject: Digital Signal and Image Processing (01CT1513)	**Aim:** Simulate linear convolution and circular convolution on discrete time signals.	
Experiment No: 2	**Date:22-07-2026**	**Enrollment No:92400133057**


Github:-https://github.com/manavkasundra/DSIP

Code:

```
import numpy as np
import matplotlib.pyplot as plt
def linear_convolution(signal1, signal2):
    linear_conv = np.convolve(signal1, signal2, mode='full')
    return linear_conv
def circular_convolution(signal1, signal2):
    # Compute the circular convolution
    fft_length = len(signal1) + len(signal2) - 1
    fft_signal1 = np.fft.fft(signal1, fft_length)
    fft_signal2 = np.fft.fft(signal2, fft_length)
    circular_conv = np.fft.ifft(fft_signal1 * fft_signal2)
    return circular_conv
# Define the discrete-time signals
signal1 = np.array([2, 3, 3, 4, 6])
signal2 = np.array([1, 3, 6, 9, 11])
# Compute the linear convolution
linear_conv = linear_convolution(signal1, signal2)
# Compute the circular convolution
circular_conv = circular_convolution(signal1, signal2)
# Plot the linear and circular convolution results
plt.figure(figsize=(10, 6))
plt.subplot(2, 1, 1)
plt.stem(linear_conv)
plt.title('Linear Convolution')
plt.xlabel('Sample')
plt.ylabel('Amplitude')
plt.subplot(2, 1, 2)
plt.stem(circular_conv)
plt.title('Circular Convolution')
plt.xlabel('Sample')
plt.ylabel('Amplitude')
plt.tight_layout()
plt.show()
```

Marwadi University Marwadi Chandarana Group NAAC A+	**Marwadi University** **Faculty of Engineering & Technology** **Department of Information and Communication Technology**	
Subject: Digital Signal and Image Processing (01CT1513)	**Aim:** Simulate linear convolution and circular convolution on discrete time signals.	
Experiment No: 2	**Date:22-07-2026**	**Enrollment No:92400133057**

Output:

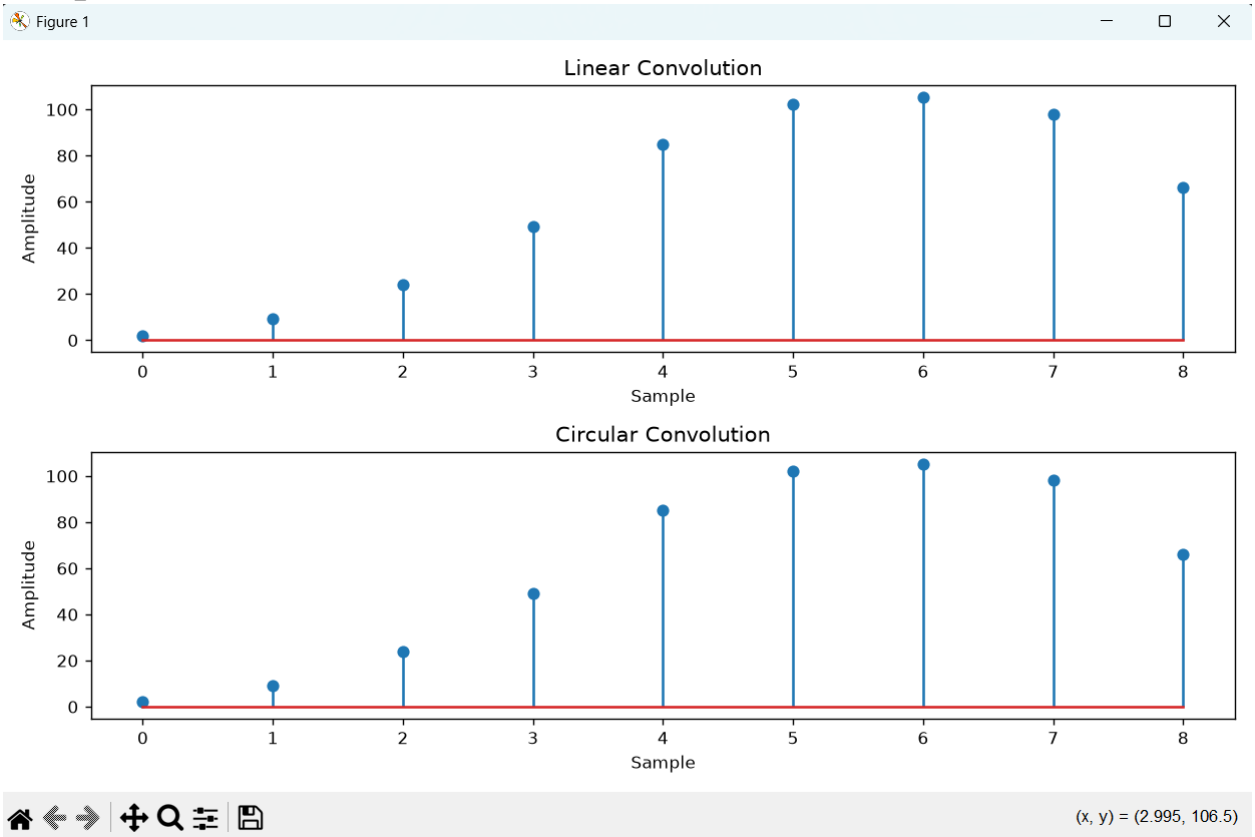


Conclusion:

This experiment shows that circular and linear convolution produce the exact same results if you add enough zeros to the signals.

Because we set the FFT length to 9 instead of 5, we gave the signals enough room so they wouldn't wrap around and overlap with themselves. That is why both graphs in the output look completely identical.

Marwadi University Marwadi Chandarana Group NAAC A+	**Marwadi University** **Faculty of Engineering & Technology** **Department of Information and Communication Technology**	
Subject: Digital Signal and Image Processing (01CT1513)	**Aim:** Simulate linear convolution and circular convolution on discrete time signals.	
Experiment No: 2	**Date:22-07-2026**	**Enrollment No:92400133057**

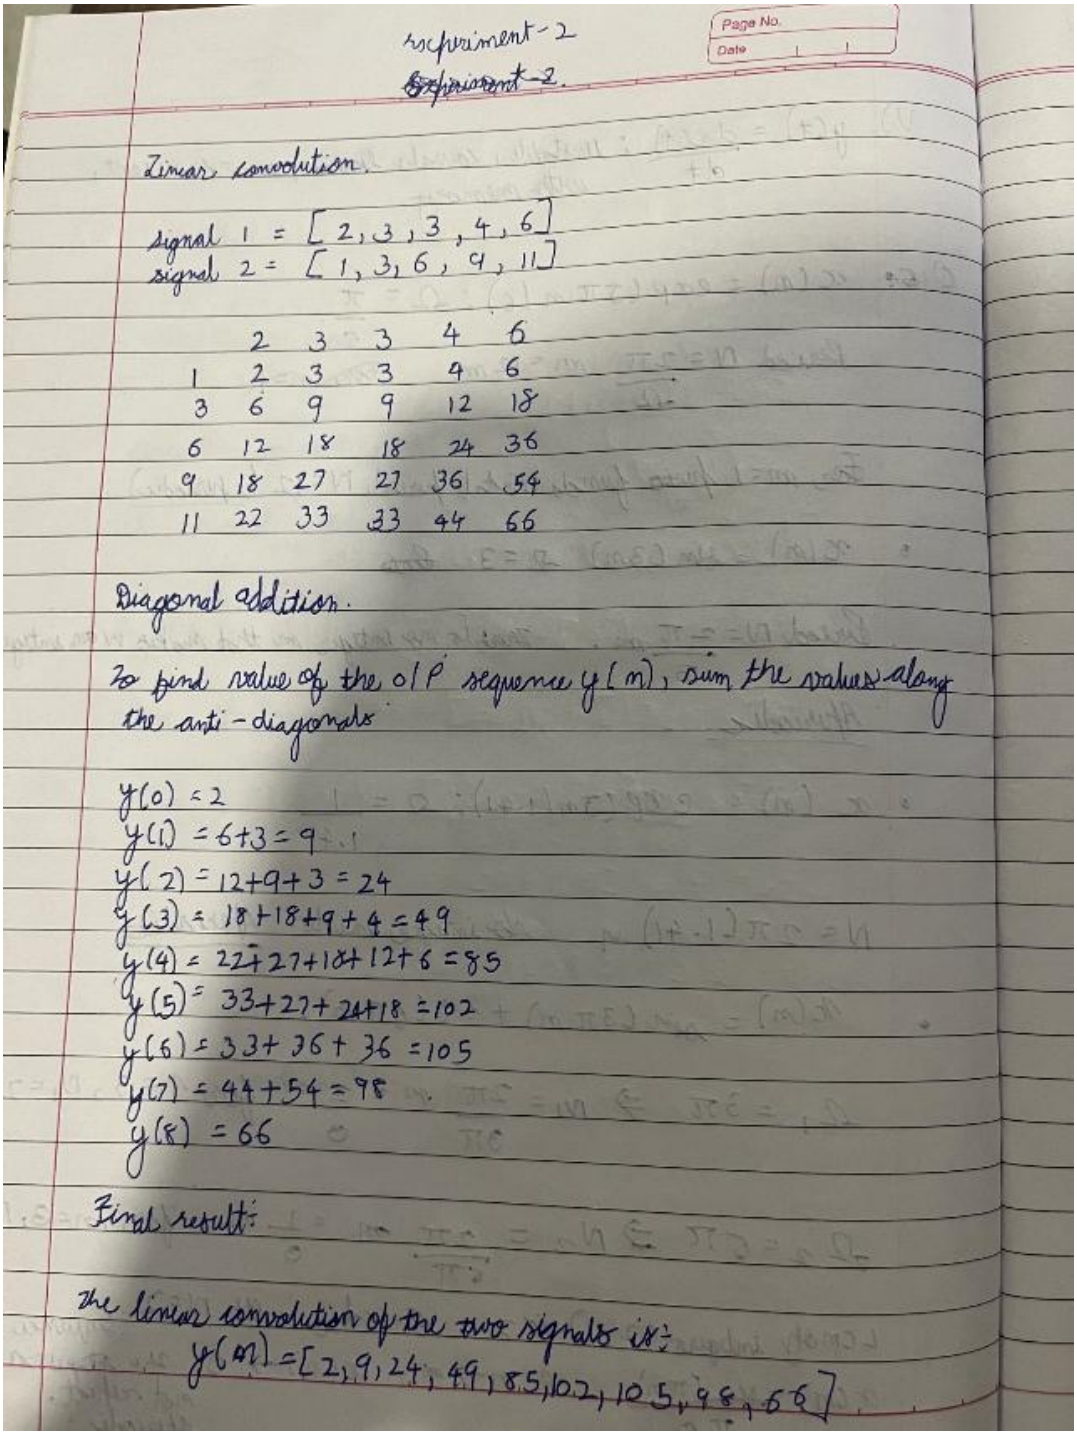

Experiment-2

Page No.
Date

Linear convolution.

signal 1 = [2, 3, 3, 4, 6]
signal 2 = [1, 3, 6, 9, 11]

	2	3	3	4	6
1	2	3	3	4	6
3	6	9	9	12	18
6	12	18	18	24	36
9	18	27	27	36	54
11	22	33	33	44	66

Diagonal addition.


To find value of the o/p sequence y[n], sum the values along the anti-diagonals

y(0) = 2
y(1) = 6+3 = 9
y(2) = 12+9+3 = 24
y(3) = 18+18+9+4 = 49
y(4) = 22+27+18+12+6 = 85
y(5) = 33+27+24+18 = 102
y(6) = 33+36+36 = 105
y(7) = 44+54 = 98
y(8) = 66

Final result:

The linear convolution of the two signals is:
y(n) = [2, 9, 24, 49, 85, 102, 105, 98, 66]

Marwadi University Marwadi Chandarana Group NAAC A+	**Marwadi University** **Faculty of Engineering & Technology** **Department of Information and Communication Technology**	
Subject: Digital Signal and Image Processing (01CT1513)	**Aim:** Simulate linear convolution and circular convolution on discrete time signals.	
Experiment No: 2	**Date:22-07-2026**	**Enrollment No:92400133057**

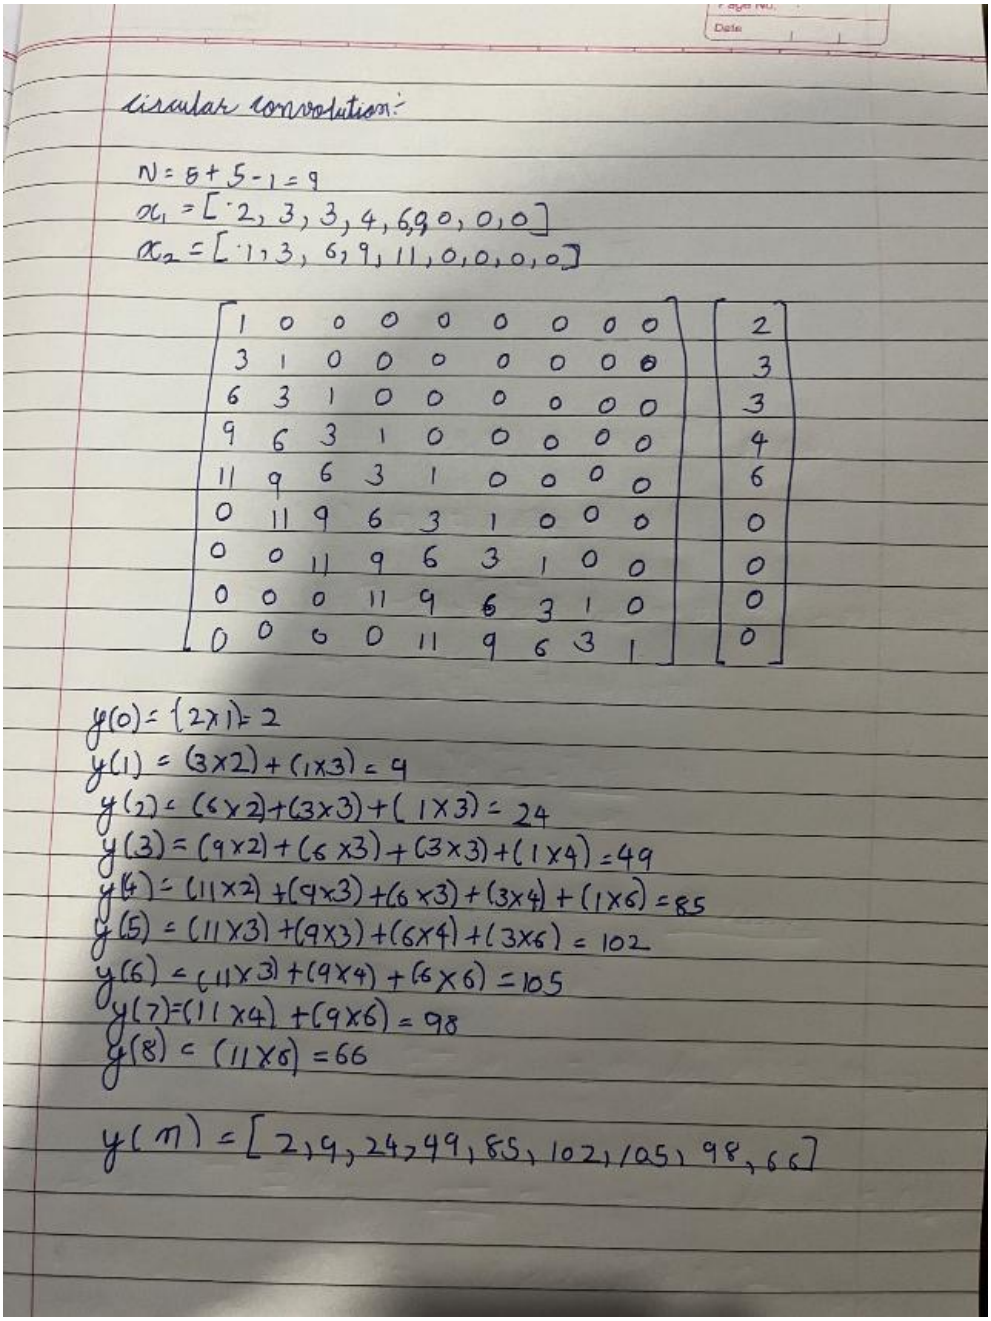

circular convolution:

$N = 5 + 5 - 1 = 9$

$x_1 = [2, 3, 3, 4, 6, 9, 0, 0, 0]$

$x_2 = [1, 3, 6, 9, 11, 0, 0, 0, 0]$

$$\begin{bmatrix} 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 3 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 6 & 3 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 9 & 6 & 3 & 1 & 0 & 0 & 0 & 0 & 0 \\ 11 & 9 & 6 & 3 & 1 & 0 & 0 & 0 & 0 \\ 0 & 11 & 9 & 6 & 3 & 1 & 0 & 0 & 0 \\ 0 & 0 & 11 & 9 & 6 & 3 & 1 & 0 & 0 \\ 0 & 0 & 0 & 11 & 9 & 6 & 3 & 1 & 0 \\ 0 & 0 & 0 & 0 & 11 & 9 & 6 & 3 & 1 \end{bmatrix} \begin{bmatrix} 2 \\ 3 \\ 3 \\ 4 \\ 6 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}$$

$y(0) = (2 \times 1) = 2$

$y(1) = (3 \times 2) + (1 \times 3) = 9$

$y(2) = (6 \times 2) + (3 \times 3) + (1 \times 3) = 24$

$y(3) = (9 \times 2) + (6 \times 3) + (3 \times 3) + (1 \times 4) = 49$

$y(4) = (11 \times 2) + (9 \times 3) + (6 \times 3) + (3 \times 4) + (1 \times 6) = 85$

$y(5) = (11 \times 3) + (9 \times 3) + (6 \times 4) + (3 \times 6) = 102$

$y(6) = (11 \times 3) + (9 \times 4) + (6 \times 6) = 105$

$y(7) = (11 \times 4) + (9 \times 6) = 98$

$y(8) = (11 \times 6) = 66$

$y(n) = [2, 9, 24, 49, 85, 102, 105, 98, 66]$