## **GATE-2010-CE**

#### ai25btech11008- Chiruvella Harshith Sharan

### Q.1 - Q.25 carry one mark each

1. The 
$$\lim_{x\to 0} \frac{\sin\left(\frac{2}{3}x\right)}{x}$$
 is

(GATE CE 2010)

A. 
$$\frac{2}{3}$$

C. 
$$\frac{3}{2}$$

2. Two coins are simultaneously tossed. The probability of two heads simultaneously appearing is

(GATE CE 2010)

A. 
$$\frac{1}{8}$$

B. 
$$\frac{1}{6}$$

C. 
$$\frac{1}{4}$$

D. 
$$\frac{1}{2}$$

3. The order and degree of the differential equation

$$\frac{d^3y}{dx^3} + 4\left(\frac{dy}{dx}\right)^2 + y^2 = 0$$

are respectively

(GATE CE 2010)

A. 3 and 2

B. 2 and 3

C. 3 and 3

D. 3 and 1

4. Two people weighing W each are sitting on a plank of length L floating on water at  $\frac{L}{4}$  from either end. Neglecting the weight of the plank, the bending moment at the centre of the plank is

- B.  $\frac{WL}{16}$  C.  $\frac{WL}{32}$
- D. zero
- 5. For the truss shown in the figure, the force in the member QR is

(GATE CE 2010)




Figure 1:

- A. zero
- B.  $\frac{P}{\sqrt{2}}$
- C. *P*
- D.  $\sqrt{2}P$
- 6. The major and minor principal stresses at a point are 3 MPa and -3 MPa respectively. The maximum shear stress at the point is (GATE CE 2010)
  - A. zero
- B. 3 MPa
- C. 6 MPa
- D. 9 MPa
- 7. The number of independent elastic constants for a linear elastic isotropic and homogeneous material is (GATE CE 2010)
  - A. 4

B. 3

C. 2

- D. 1
- 8. The effective length of a column of length L fixed against rotation and translation at one end and free at the other end is (GATE CE 2010)
  - A. 0.5*L*
- B. 0.7*L*
- C. 1.414*L*
- D. 2*L*
- 9. As per Indian standard code of practice for prestressed concrete (IS:1343-1980) the minimum grades of concrete to be used for post-tensioned and pre-tensioned structural elements are respectively (GATE CE 2010)

10. A solid circular shaft of diameter d and length L is fixed at one end and free at the other end. A torque T is applied at the free end. The shear modulus of the material is G. The angle of twist at the free end is (GATE CE 2010)

B.  $\frac{32TL}{\pi d^4G}$  C.  $\frac{64TL}{\pi d^4G}$  D.  $\frac{128TL}{\pi d^4G}$ 

11. In a compaction test, G, w, S and e represent the specific gravity, water content, degree of saturation and void ratio of the soil sample, respectively. If  $\gamma_w$  represents the unit weight of water and  $\gamma_d$  represents the dry unit weight of the soil, the equation for zero air voids line is (GATE CE 2010)

A.  $\gamma_d = \frac{G\gamma_w}{1 + Se}$  B.  $\gamma_d = \frac{G\gamma_w}{1 + Gw}$  C.  $\gamma_d = \frac{G_w}{e + \gamma_w S}$  D.  $\gamma_d = \frac{G_w}{1 + Se}$ 

12. A fine grained soil has liquid limit of 60 and plastic limit of 20. As per the plasticity chart, according to IS classification, the soil is represented by the letter symbols (GATE CE 2010)

A. CL

B. CI

C. CH

D. CL-ML

13. Quick sand condition occurs when

(GATE CE 2010)

- A. the void ratio of the soil becomes 1.0
- B. the upward seepage pressure in soil becomes zero
- C. the upward seepage pressure in soil becomes equal to the saturated unit weight of the soil
- D. the upward seepage pressure in soil becomes equal to the submerged unit weight of the soil
- 14. The e-log p curve shown in the figure is representative of




Figure 2:

- A. Normally consolidated clay
- B. Over consolidated clay
- C. Under consolidated clay
- D. Normally consolidated clayey sand
- 15. If  $\sigma_h$ ,  $\sigma_v$ ,  $\sigma'_h$  and  $\sigma'_v$  represent the total horizontal stress, total vertical stress, effective horizontal stress and effective vertical stress on a soil element, respectively, the coefficient of earth pressure at rest is given by (GATE CE 2010)

A. 
$$\frac{\sigma_h}{\sigma_v}$$

B. 
$$\frac{\sigma'_h}{\sigma'_v}$$

C. 
$$\frac{\sigma_v}{\sigma_h}$$

D. 
$$\frac{\sigma'_v}{\sigma'_h}$$

- 16. A mild-sloped channel is followed by a steep-sloped channel. The profiles of gradually varied flow in the channel are (GATE CE 2010)
  - $A. M_1, S_2$
- B.  $M_2$ ,  $S_3$
- $C. M_2, S_1$
- $D. M_2, S_2$
- 17. The flow in a rectangular channel is subcritical. If width of the channel is reduced at a certain section, the water surface under no-choke condition will (GATE CE 2010)
  - A. drop at a downstream section
- B. rise at a downstream section
- C. rise at an upstream section
- D. not undergo any change

18. The correct match of Group-I with Group-II is

(GATE CE 2010)

Group-II Group-II

P. Evapotranspiration
Q. Infiltration
R. Synthetic unit hydrograph
S. Channel Routing
Penman method
S. Snyder's method
Muskingum method
Horton's method

A. P-1, Q-3, R-4, S-2 B. P-1, Q-4, R-2, S-3 C. P-3, Q-4, R-1, S-2 D. P-4, Q-2, R-1, S-3

19. Group-I gives a list of devices and Group-II gives the list of uses. The correct match of Group-I with Group-II is (GATE CE 2010)

Group-II Group-II

P. Pitot tube 1. measuring pressure in a pipe

Q. Manometer
R. Venturimeter
S. Anemometer
Q. measuring velocity of flow in a pipe
3. measuring air and gas velocity
4. measuring discharge in a pipe

A. P-1, Q-2, R-4, S-3 B. P-2, Q-1, R-3, S-4 C. P-2, Q-1, R-4, S-3 D. P-4, Q-1, R-3, S-2

20. A coastal city produces municipal solid waste (MSW) with high moisture content, high organic materials, low calorific value and low inorganic materials. The most effective and sustainable option for MSW management in that city is (GATE CE 2010)

A. Composting B. Dumping in sea C. Incineration D. Landfill

21. According to the Noise Pollution (Regulation and Control) Rules, 2000, of the Ministry of Environment and Forests, India, the day time and night time noise level limits in ambient air for residential areas expressed in dB(A) Leq are (GATE CE 2010)

A. 50 and 40 B. 55 and 45 C. 65 and 55 D. 75 and 70

22. An air parcel having 40°C temperature moves from ground level to 500 m elevation in dry air following the "adiabatic lapse rate". The resulting temperature of air parcel at 500 m elevation will be (GATE CE 2010)

- A. 35°C B. 38°C C. 41°C D. 44°C
- 23. Aggregate impact value indicates the following property of aggregates (GATE CE 2010)
  - A. Durability
- B. Toughness
- C. Hardness
- D. Strength
- 24. As per IRC: 67-2001, a traffic sign indicating the Speed Limit on a road should be of (GATE CE 2010)
  - A. Circular Shape with White Background and Red Border
  - B. Triangular Shape with White Background and Red Border
  - C. Triangular Shape with Red Background and White Border
  - D. Circular Shape with Red Background and White Border
- 25. The local mean time at a place located in longitude 90°40′ E when the standard time is 6 hours and 30 minutes and the standard meridian is 82°30′ E is (GATE CE 2010)
  - A. 5 hours, 2 minutes and 40 seconds
  - B. 5 hours, 57 minutes and 20 seconds
  - C. 6 hours and 30 minutes
  - D. 7 hours, 02 minutes and 40 seconds

#### Q.26 – Q.55 carry two marks each

26. The solution to the ordinary differential equation

$$\frac{d^2y}{dx^2} + \frac{dy}{dx} - 6y = 0$$

A. 
$$y = c_1 e^x + c_2 e^{-2x}$$
 B.  $y = c_1 e^{3x} + c_2 e^{2x}$  C.  $y = c_1 e^{-x} + c_2 e^{-2x}$  D.  $y = c_1 e^{-3x} + c_2 e^{-2x}$ 

27. The inverse of the matrix 
$$\begin{pmatrix} 3+2i & i \\ -i & 3-2i \end{pmatrix}$$
 is (GATE CE 2010)

A. 
$$\frac{1}{12} \begin{pmatrix} 3+2i & -i \\ i & 3-2j \end{pmatrix}$$
 B.  $\frac{1}{12} \begin{pmatrix} 3-2i & -i \\ i & 3+2j \end{pmatrix}$  C.  $\frac{1}{14} \begin{pmatrix} 3+2i & -i \\ i & 3-2j \end{pmatrix}$  D.  $\frac{1}{14} \begin{pmatrix} 3-2i & -i \\ i & 3+2j \end{pmatrix}$ 

28. The table below gives values of a function F(x) obtained for values of x at intervals of 0.25.

The value of the integral of the function between the limits 0 to 1 using Simpson's rule is (GATE CE 2010)

29. The partial differential equation that can be formed from

$$z = ax + by + ab$$

has the form (with  $p = \frac{\partial z}{\partial x}$  and  $q = \frac{\partial z}{\partial y}$ )

(GATE CE 2010)

A. 
$$z = px + ay$$

B. 
$$z = px + pq$$

A. 
$$z = px + qy$$
 B.  $z = px + pq$  C.  $z = px + qy + pq$  D.  $z = qy + pq$ 

D. 
$$z = av + pa$$

30. A parabolic cable is held between two supports at the same level. The horizontal span between the supports is L. The sag at the mid-span is h. The equation of the parabola is

$$y = \frac{4h}{L^2}x^2$$

where x is the horizontal coordinate and y is the vertical coordinate with the origin at the centre of the cable. The expression for the total length of the cable is (GATE CE 2010)

A. 
$$\int_0^{L/2} \sqrt{1 + 64 \frac{h^2 x^2}{L^4}} dx$$
  
B. 
$$2 \int_0^{L/2} \sqrt{1 + 64 \frac{h^2 x^2}{L^4}} dx$$

C. 
$$\int_0^{L/2} \sqrt{1 + 64 \frac{h^2 x^2}{L^4}} dx$$
  
D. 
$$2 \int_0^{L/2} \sqrt{1 + 64 \frac{h^2 x^2}{L^4}} dx$$

31. Given a function

$$f(x, y) = 4x^2 + 6y^2 - 8x - 4y + 8$$

The optimal value of f(x, y)

(GATE CE 2010)

A. is a minimum equal to 10/3

B. is a maximum equal to 10/3

C. is a minimum equal to 8/3

D. is a maximum equal to 8/3

32. A double cover butt riveted joint is used to connect two flat plates of 200 mm width and 14 mm thickness as shown in the figure. There are twelve power driven rivets of 20 mm diameter at a pitch of 50 mm in both directions on either side of the plate. Two cover plates of 10 mm thickness are used. The capacity of the joint in tension considering bearing and shear ONLY, with permissible bearing and shear stresses as 300 MPa and 100 MPa respectively is (GATE CE 2010)

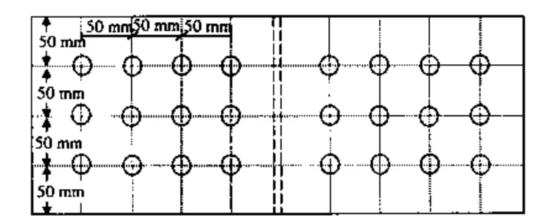


Figure 3:

A. 1083.6 kN

B. 871.32 kN

C. 541.8 kN

D. 433.7 kN

33. Two plates, subjected to direct tension, each of 10 mm thickness and having widths of 100 mm and 175 mm, respectively are to be fillet welded with an overlap of 200 mm. Given that the permissible weld stress is 110 MPa and the permissible stress in steel is 150 MPa, the length of the weld required using the maximum permissible weld size as per IS:800-1984 is (GATE CE 2010)

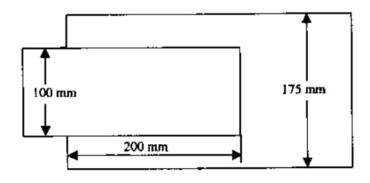


Figure 4:

A. 245.3 mm

B. 229.2 mm

C. 205.5 mm

D. 194.8 mm

34. For the simply supported beam of length L, subjected to a uniformly distributed moment M kN-m per unit length as shown in the figure, the bending moment (in kN-m) at the mid-span of the beam is (GATE CE 2010)




Figure 5:

A. zero

B. *M* 

C.~ML

D. M/L

35. A disc of radius r has a hole of radius  $\frac{r}{2}$  cut-out as shown. The centroid of the remaining disc (shaded portion) at a radial distance from the centre "O" is




Figure 6:

A.  $\frac{r}{2}$ 

B.  $\frac{r}{3}$ 

C.  $\frac{r}{6}$ 

D.  $\frac{r}{8}$ 

36. A three hinged parabolic arch having a span of 20 m and a rise of 5 m carries a point load of 10 kN at quarter span from the left end as shown in the figure. The resultant reaction at the left support and its inclination with the horizontal are respectively (GATE CE 2010)

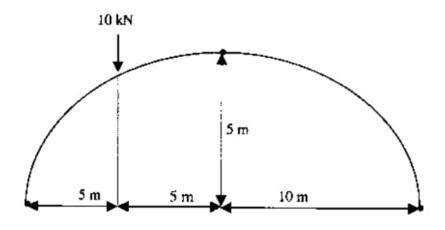


Figure 7:

A. 9.01 kN and  $56.31^{\circ}$ 

C. 7.50 kN and 56.31°

B. 9.01 kN and  $33.69^{\circ}$ 

D. 2.50 kN and 33.69°

37. The vertical stress at point  $P_1$  due to the point load Q on the ground surface as shown in figure is  $\sigma_z$ . According to Boussinesq's equation, the vertical stress at point  $P_2$  shown in figure will be (GATE CE 2010)




Figure 8:

A.  $\frac{\sigma_z}{2}$ 

B.  $\sigma_z$ 

C.  $2\sigma_z$ 

D.  $4\sigma_{z}$ 

38. An open ended steel barrel of 1 m height and 1 m diameter is filled with saturated fine sand having coefficient of permeability of  $10^{-2}$  m/s. The barrel stands on a saturated bed of gravel. The time required for the water level in the barrel to drop by 0.75 m is (GATE CE 2010)

A. 58.9 s

B. 75 s

C. 100 s

D. 150 s

39. The ultimate load capacity of a 10 m long concrete pile of square cross section 500 mm  $\times$  500 mm driven into a homogeneous clay layer having undrained cohesion value of 40 kPa is 700 kN. If the cross section of the pile is reduced to 250 mm  $\times$  250 mm and the length of the pile is increased to 20 m, the ultimate load capacity will be (GATE CE 2010)

A. 350 kN

B. 632.5 kN

C. 722.5 kN

D. 1400 kN

40. For a rectangular channel section, Group-I lists geometrical elements and Group-II gives proportions for hydraulically efficient section.

Group-I Group-II P. Top width  $1. y_c/2$  Q. Perimeter  $2. y_c$  R. Hydraulic Radius  $3. 2y_c$  S. Hydraulic Depth  $4. y_c$ 

 $y_c$  is the flow depth corresponding to hydraulically efficient sections. The correct match of Group-I with Group-II is (GATE CE 2010)

A. P-2, Q-4, R-1, S-3	B. P-3, Q-1, R-4, S-2	C. P-3, Q-4, R-1, S-2	D. P-3, Q-4, R-2, S-1
-----------------------	-----------------------	-----------------------	-----------------------

41.	The Froude number of flow in a rect	angular channel is 0.8.	. If the depth of flow	is 1.5 m, the
	critical depth is		(GAT	E CE 2010)

A. 1.80 m

B. 1.56 m

C. 1.36 m

D. 1.29 m

42. A well of diameter 20 cm fully penetrates a confined aquifer. After a long period of pumping at a rate of 2720 litres per minute, the observations of drawdown taken at 10 m and 100 m distances from the center of the well are found to be 3 m and 0.5 m respectively. The transmissivity of the aquifer is (GATE CE 2010)

A.  $676 \text{ m}^2/\text{day}$ 

B.  $576 \text{ m}^2/\text{day}$  C.  $526 \text{ m}^2/\text{day}$ 

D.  $249 \text{ m}^2/\text{day}$ 

43. If the BOD<sub>5</sub> of a wastewater sample is 75 mg/L and reaction rate constant k (base e) is 0.345 per day, the amount of BOD remaining in the given sample after 10 days is (GATE CE 2010)

A. 3.21 mg/L

B. 3.45 mg/L C. 3.69 mg/L

D. 3.92 mg/L

44. Consider the following statements in the context of geometric design of roads:

I: A simple parabolic curve is an acceptable shape for summit curves

II: Comfort to passengers is an important consideration in the design of summit curves

(GATE CE The correct option evaluating the above statements and their relationship is 2010)

A. I is true, II is false

B. I is true, II is true, and II is the correct reason for I

C. I is true, II is true, and II is NOT the correct reason for I

D. I is false, II is true

45. The design speed for a two-lane road is 80 kmph. When a design vehicle with a wheelbase of 6.6 m is negotiating a horizontal curve on that road, the off-tracking is measured as 0.096 m. The required widening of carriageway of the two-lane road on the curve is approximately

	A. 0.55 m	B. 0.65 m	C. 0.75 m	D. 0.85 m	
46.	<ul> <li>46. Consider the following statements in the context of cement concrete pavements:</li> <li>I: Warping stresses in cement concrete pavements are caused by the seasonal variation in temperature</li> <li>II: Tie bars are generally provided across transverse joints of cement concrete pavement</li> </ul>				
	The correct option eva	luating the above state	ments is	(GATE CE 2010)	
	A. I: True, II: False	B. I: False, II: True	C. I: True, II: True	D. I: False, II: False	
45			n. c		

47. A bench mark has been established at the soffit of an ornamental arch at the known elevation of 100.0 m above mean sea level. The back sight used to establish height of instrument is an inverted staff reading of 2.105 m. A forward sight reading with normally held staff of 1.105 m is taken on a recently constructed plinth. The elevation of the plinth is

(GATE CE 2010)

(A) 103.210 m

(B) 101.000 m

(C) 99.000 m

(D) 96.790 m

Common Data for Questions 48 and 49:

Ion concentrations obtained for a groundwater sample (having pH = 8.1) are given below

Ion	Ca <sup>2+</sup>	Mg <sup>2+</sup>	Na <sup>+</sup>	HCO <sub>3</sub>	$\mathrm{SO}_4^{2-}$	Cl <sup>-</sup>
Ion concentration (mg/L)	100	6	15	250	45	39
Atomic Weight	Ca = 40	Mg = 24	Na = 23	H = 1, C = 12, O = 16	S = 32, O = 16	Cl = 35.5

48. Total hardness (mg/L as CaCO<sub>3</sub>) present in the above water sample is

(GATE CE 2010)

(A) 205

(B) 250

(C) 275

(D) 308

49. Carbonate hardness (mg/L as CaCO<sub>3</sub>) present in the above water sample is

(A) 205

(B) 250

(C) 275

(D) 289

Common Data for Questions 50 and 51:

The moisture holding capacity of the soil in a 100 hectare farm is 18 cm/m. The field is to be irrigated when 50 percent of the available moisture in the root zone is depleted. The irrigation water is to be supplied by a pump working for 10 hours a day, and water application efficiency is 75 percent. Details of crops planned for cultivation are as follows

Crop	Root zone depth (m)	Peak rate of moisture use (mm/day)
X	1.0	5.0
Y	0.8	4.0

50. The capacity of irrigation system required to irrigate crop 'X' in 36 hectares is

(GATE CE 2010)

(A) 83 litres/sec

(B) 67 litres/sec

(C) 57 litres/sec

(D) 53 litres/sec

51. The area of crop 'Y' that can be irrigated when the available capacity of irrigation system is 40 litres/sec is

(GATE CE 2010)

(A) 40 hectares

(B) 36 hectares

(C) 30 hectares

(D) 27 hectares

Statement for Linked Answer Questions 52 and 53:

A doubly reinforced rectangular concrete beam has a width of 300 mm and an effective depth of 500 mm. The beam is reinforced with 2200 mm<sup>2</sup> of steel in tension and 628 mm<sup>2</sup> of steel in compression. The effective cover for compression steel is 50 mm. Assume that both tension and compression steel yield. The grades of concrete and steel used are M20 and Fe250, respectively. The stress block parameters (rounded off to first two decimal places) for concrete shall be as per IS 456:2000.

52. The depth of neutral axis is

	(A) 205.30 mm	(B) 184.56 mm	(C) 160.91 mm	(D) 145.30 mm
53.	The moment of resista	nce of the section is		
				(GATE CE 2010)
	(A) 206.00 kN-m	(B) 209.20 kN-m	(C) 236.80 kN-m	(D) 251.90 kN-m
	Statement for Linked A	Answer Questions 54 an	ad 55:	
	The unconfined compr	ressive strength of a satu	arated clay sample is 54	kPa.
54.	The value of cohesion	for the clay is		
				(GATE CE 2010)
	(A) zero	(B) 13.5 kPa	(C) 27 kPa	(D) 54 kPa
55.	-	size 4 m x 4 m is resting apacity of the footing (as	-	
				(GATE CE 2010)
	(A) 1600 kPa	(B) 316 kPa	(C) 200 kPa	(D) 100 kPa
	General Aptitu	ıde (GA) Questi	ions	
	•	, , ,		
	Q.56 – Q.60 carry one	mark each.		
56.	Which of the following	options is the closest in	n meaning to the word b	pelow: (GATE CE 2010)
	(A) cyclic	(B) indirect	(C) confusing	(D) crooked

	Select the pair that be Unemployed: Work	-	ation in the original pai	r. (GATE CE 2010)	
	(A) fallow: land (B) unaware: sleepe	er	(C) wit : jester (D) renovated : he	ouse	
58.		age tooi	he options given below ır natural resources, we	to complete the following would leave a better	
				(GATE CE 2010)	
	(A) uphold	(B) restrain	(C) cherish	(D) conserve	
59.	Choose the most app sentence:	propriate word from t	he options given below	to complete the following	
	His rather casual rea	marks on politics	his lack of ser	iousness about the subject.	
				(GATE CE 2010)	
	(A) masked	(B) belied	(C) betrayed	(D) suppressed	
60.			number of persons play	ay football and 10 of them ing neither hockey nor (GATE CE 2010)	
	(A) 2	(B) 17	(C) 13	(D) 3	
	Q.61 – Q.65 carry two marks each.				
	populations. Chemic	cal agents that do the	scale clashes of armies ir work silently appear le in military establishn		

57. The question below consists of a pair of related words followed by four pairs of words.

chemical agents are useful tools for their cause.

61.	Which of the foll	lowing statements best s	ums up the meaning of	the above passage:
				(GATE CE 2010)
	B. Chemical ages C. Use of chemic	are has resulted in civil so that are useful in modern all agents in warfare wood tary establishments like	warfare. ald be undesirable.	in war.
62.	If $137 + 276 = 4$	35, how much is 731 + 6	572?	
				(GATE CE 2010)
	(A) 534	(B) 1403	(C) 1623	(D) 1513
63.	days; 10 unskille	can build a wall in 20 d d workers can build a w 5 unskilled workers, how	all in 30 days. If a team	
				(GATE CE 2010)
	(A) 20 days	(B) 18 days	(C) 16 days	(D) 15 days
64.	Given digits 2, 2, can be formed?	3, 3, 3, 4, 4, 4, 4, how r	nany distinct 4-digit nu	mbers greater than 3000
				(GATE CE 2010)
	(A) 50	(B) 51	(C) 52	(D) 54
	born on 1st Janua		etween any two success	ers and sisters). All were sive siblings (that is born
	i. Hari's age	- Gita's age ¿ Irfan's age	e + Saira's age.	
	_	ference between Gita an not the youngest.	d Saira is 1 year. Howe	ver, Gita is not the oldest
	iii. There are no	o twins.		

65. In what order were they born (oldest first)?

(GATE CE 2010)

(A) HSIG (B) SGHI (C) IGSH (D) IHSG

# END OF QUESTION PAPER