

Transponder Lineal
AMSAT Argentina
UHF=>VHF

SAW

Y2

SAW

5V @ 200 mA

-117dbm => 200mW



UHF


Y1

C18


VHF

J2

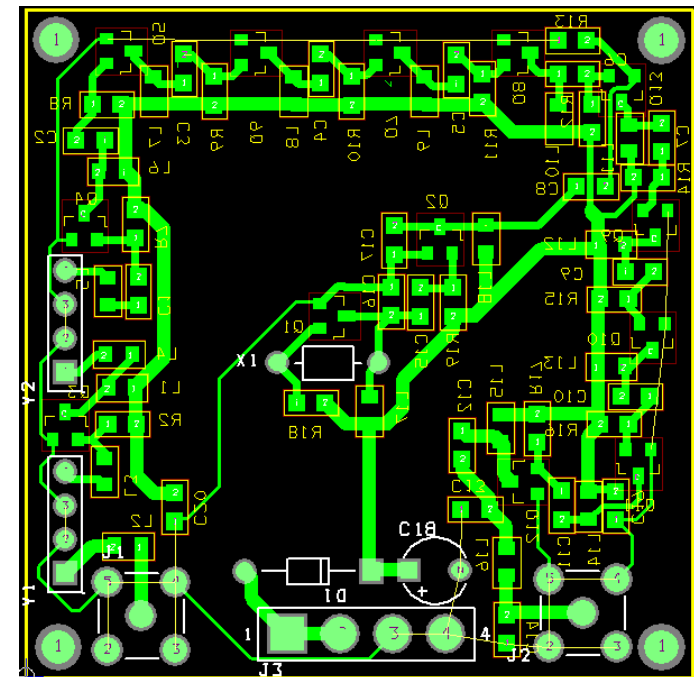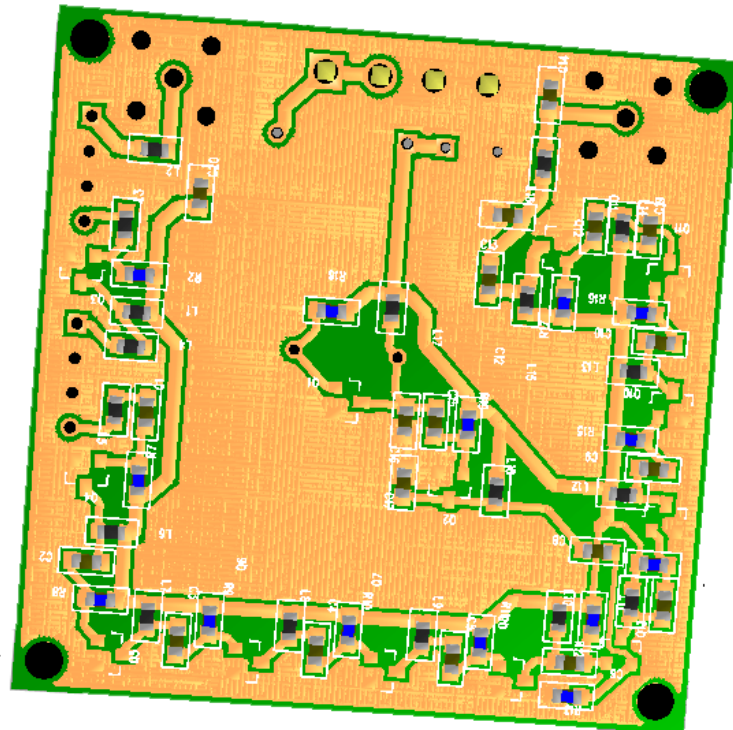

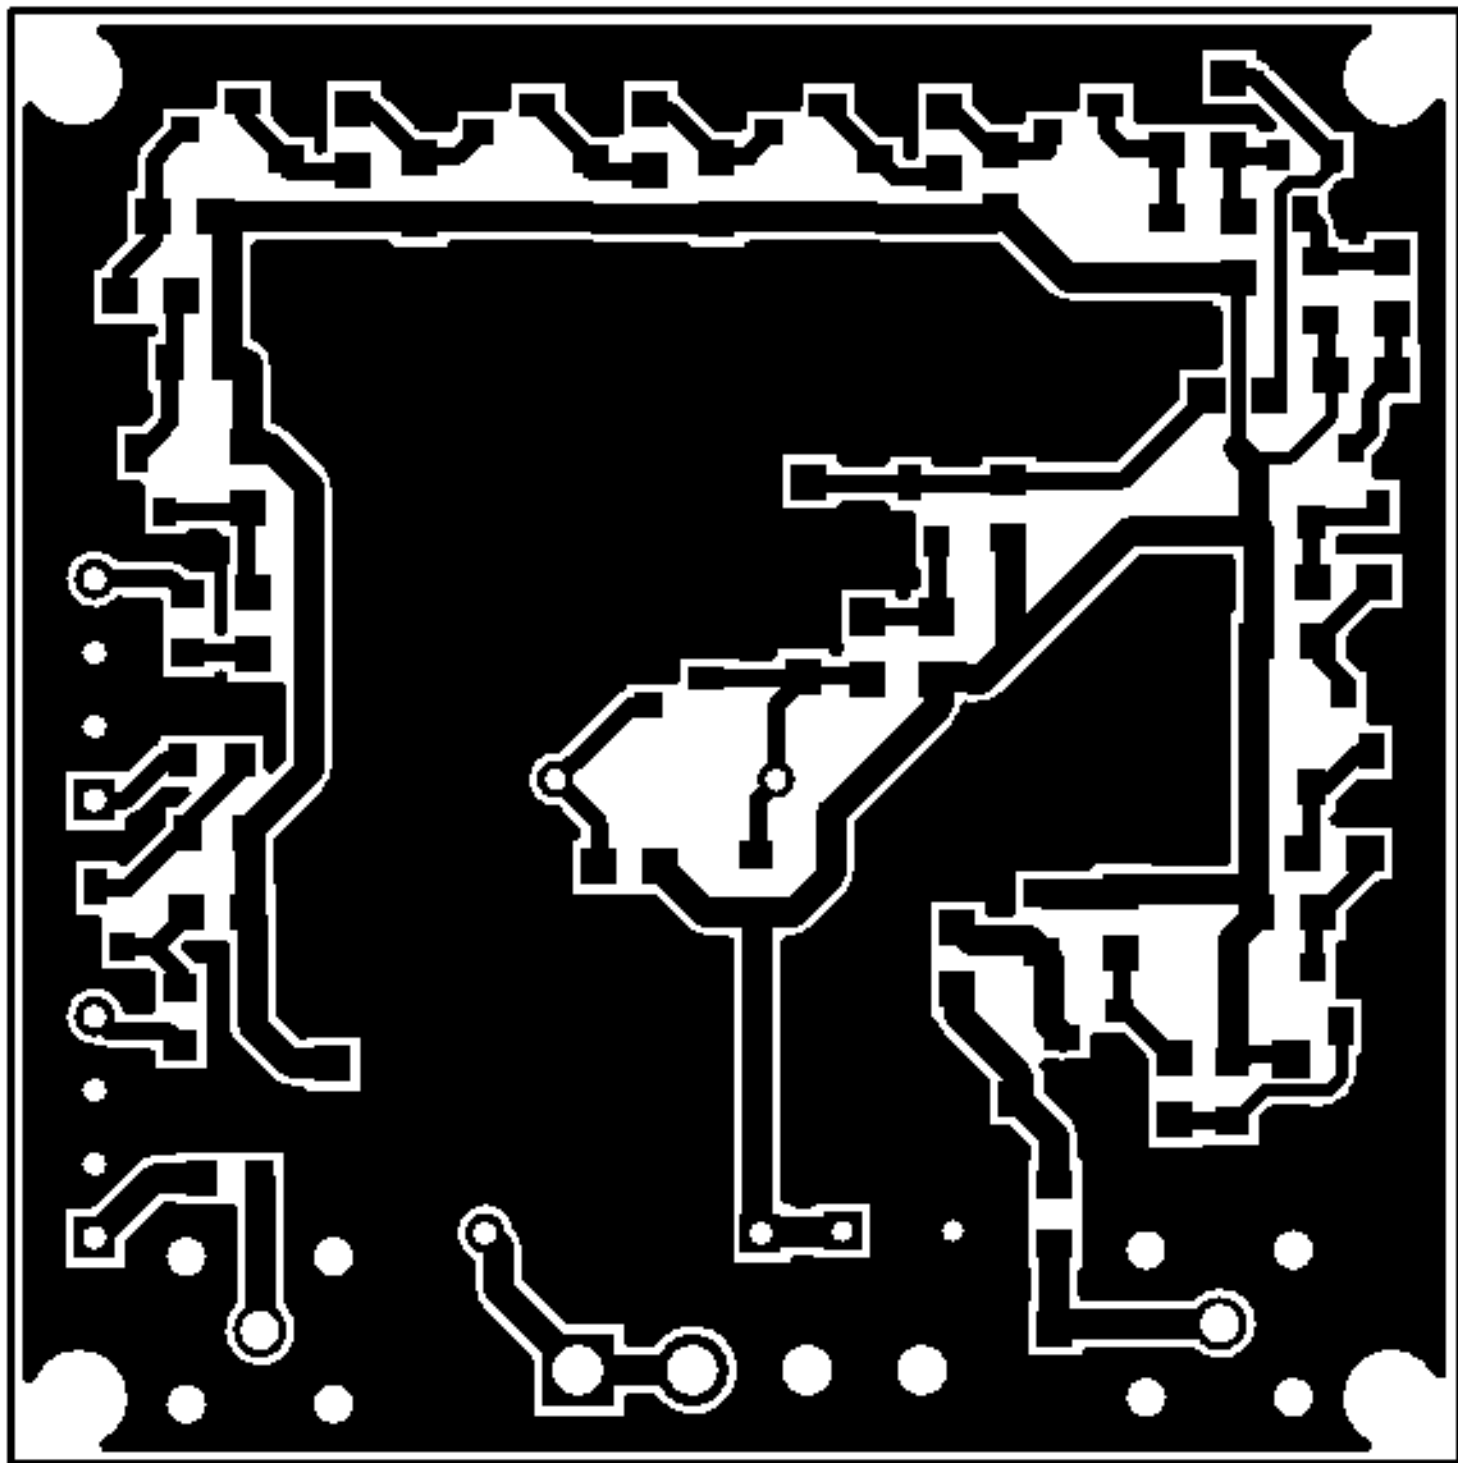

MASCARA DE COMPONENTES LADO SOLDADURA

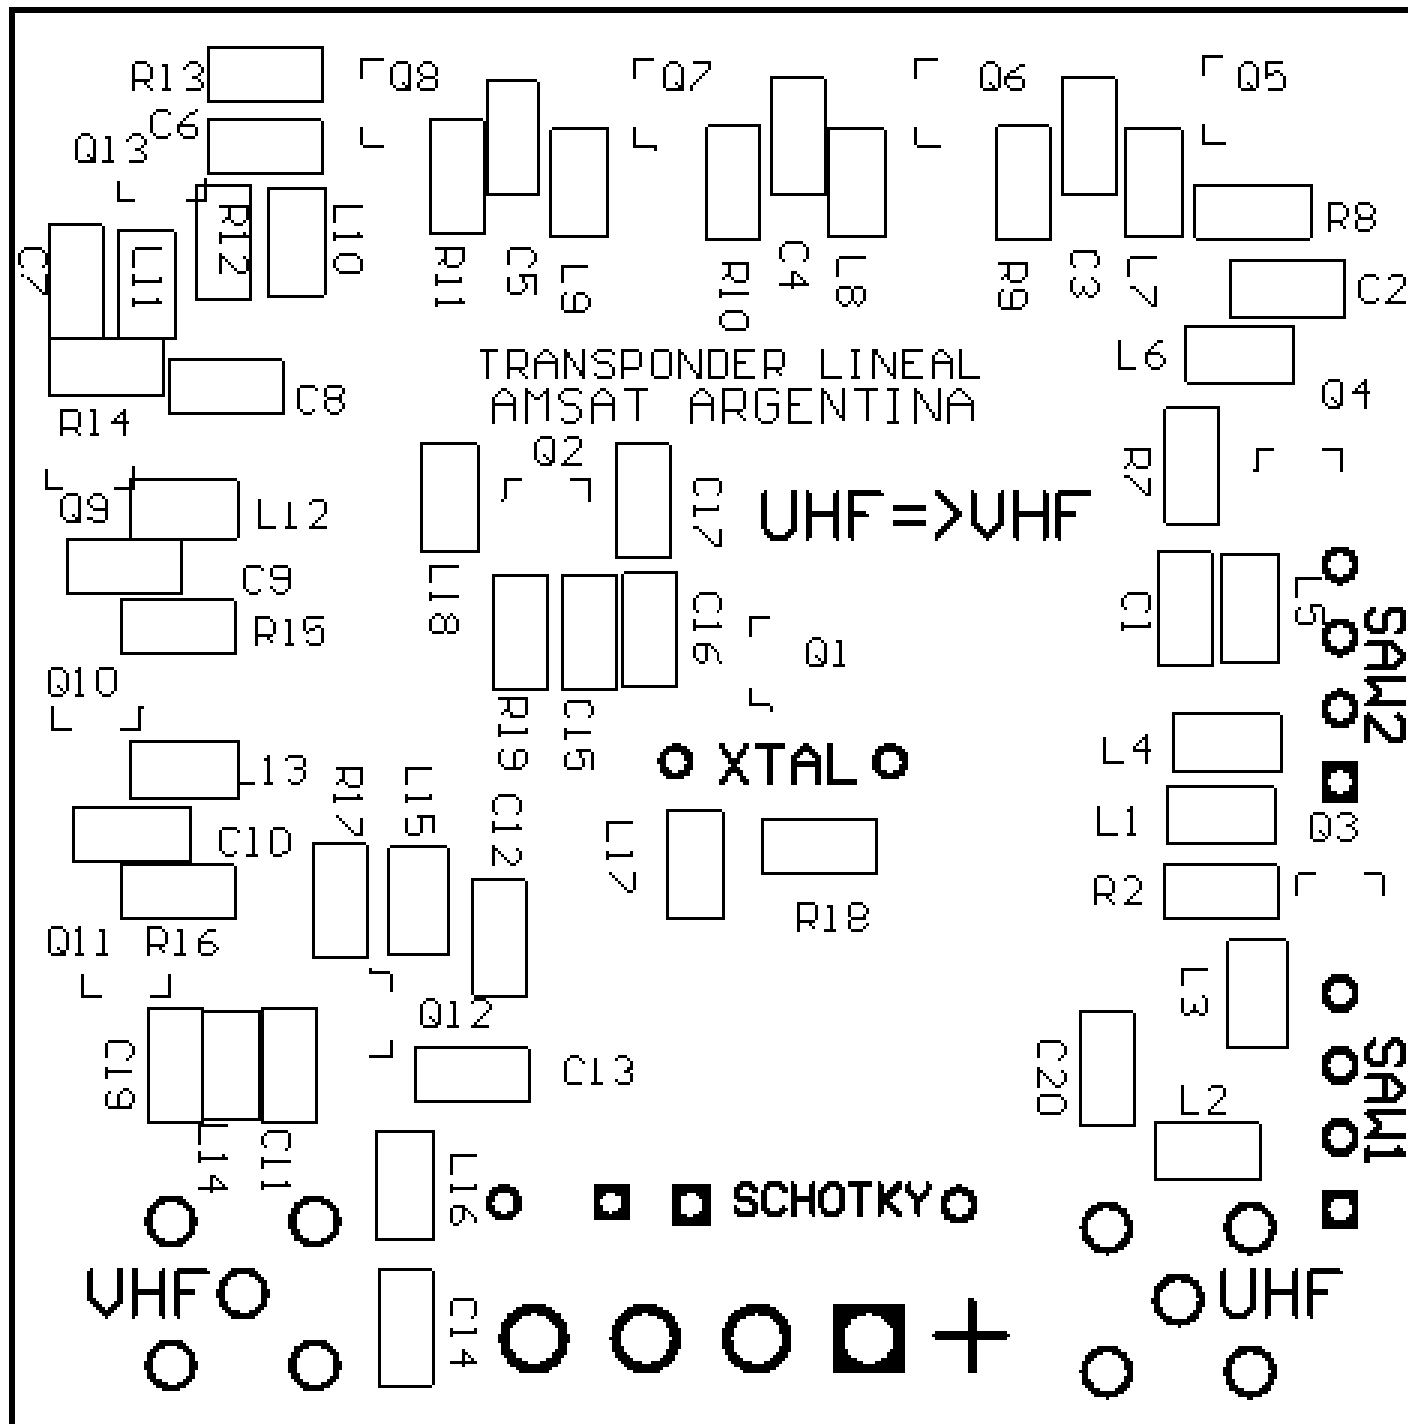

TRANSPUVZ Listado Componentes - Superficie: 0805 & SOT23

#	Parte	C.	Referencia
1	22p	8	C1, C2, C3, C4, C5, C6, C8, C17
2	47p	6	C7, C9, C10, C11, C13, C16
3	470p	1	C12
4	82p	1	C14
5	10p	1	C15
6	100u	1	C18 ELECTROLITICO D0-64
7	100n	2	C19, C20
8	1n5819	1	D1 (MONTAJE D0-64)
9	4c .15	1	J3 CONECTOR DE ALIMENTACION
10	100nH	6	L1, L6, L7, L8, L9, L10
11	39Nh	5	L2, L3, L4, L5, L16
12	220nH	6	L11, L12, L13, L14, L15, L17
13	47nH	1	L18
14	BFR92A	13	Q1, Q2, Q3, Q4, Q5, Q6, Q7, Q8, Q9, Q10, Q11, Q12, Q13
15	47k	8	R2, R7, R8, R9, R10, R11, R12, R14
16	330	1	R13
17	18k	2	R15, R16
18	10k	2	R17, R19
19	22k	1	R18
20	SMA90°	2	J1, J2 UHF/VHF ANTENNA
21	XTAL	1	X1 32.2 MHz HC49U BAJO PERFIL
22	SAW	2	Y1, Y2 435.72 MHz FILTROS SAW
23	FR4	1	5cm x 5cm IMPRESO SIMPLE FAZ