OUNCER™ AUDIO UNITS

PACKAGING Fully impregnated and sealed in a drawn aluminum housing. Mounting opposite terminal board.

APPLICATIONS Ideal for portable broadcast, aircraft, concealed service, and similar applications. High fidelity characteristics are provided.

TERMINALS Solder lug mounted in high quality phenolic board.

HERMETIC METAL CASED MIL TYPES Listed on page 13 (RC-25).

CURVES See facing page. "O" and "P" units have same electrical parameters for similar part number.



OUNCER CASE

Dia. ..... 7/8"
Ht. ..... 1 3/16"
Term proj. ..... 5/32"
Mtg. ..... 11/16"
Scr. 2-56
Wt. ..... 1 oz.




0-16 CASE

Dia. ..... 1 1/16"
Ht. ..... 1 1/2"
Mtg. ..... 1 1/2"
Scr. 6-32
Wt. ..... 3 oz.
Clamp.... 1 5/16 x 1 7/8"



Hipermalloy Shield (0-17)

shown fitting over ouncer unit

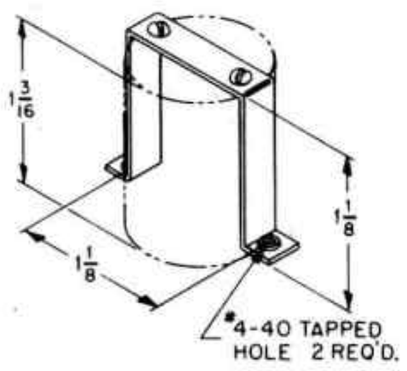

0-BR

Ouncer chassis mount bracket

INPUT & MIXING TRANSFORMERS

Type No.	Application	Pri. Imp. Ohms	Unbal. maDC	Sec. Imp. Ohms	±1 db (Hz)	Max. Level dbm	Max. Level mw	Pri. Resis. Ohms
0-1	Low imp. to grid	50, 200/250, 500/600		50,000	30-20,000	+ 8	6.3	52
0-2	Low imp. to PP grids	50, 200/250 500/600		50,000 CT	30-20,000	+ 8	6.3	52
0-3	Low imp. to grid	7.5/30		50,000	30-20,000	+ 8	6.3	4.5
0-11	Crystal to transistor or line	50,000		50, 200/250, 500/600	30-20,000	+ 8	6.3	3900
0-12	Mixing, matching	50, 200/250,		Same as 0-11	30-20,000	+ 8	6.3	12
0-14	50:1 Low imp./grid	200		½ Megohm	50-5000	+ 8	6.3	10
0-16	Low imp. to grid	250 CT		50,000	30-20,000	+ 8	6.3	40
	Uses two heavy gauge hipermalloy shields for very low hum pickup plus orientable mounting. Primary CT is balanced to 1%. Can be used for 150, 200, 250, 500, or 600 ohm sources . . . 200:1 imped. ratio. 3 oz.							
0-25	Transistor input	600/150 split		2000/500 split	50-20,000	+15	30	70

INTERSTAGE TRANSFORMERS

0-4	Plate to grid	15,000	60,000	30-20,000	+ 8	6.3	710
0-5	Plate to grid	15,000, 4 ma	60,000	200-10,000	+ 8	6.3	710
0-6	Plate to PP grids	15,000	95,000 CT	30-20,000	+ 8	6.3	690
0-7	Plate to PP grids	15,000, 4 ma	95,000 CT	200-10,000	+ 8	6.3	690
0-15	10:1 Pl. to grid	10,000	1 Megohm	100-3,000	+ 8	6.3	330
0-18	Transistor Int.	10K/2.5K split,4 ma	2000/500 split	100-20,000	+20	100	800
0-19	Transistor Int.	10K/2.5K split,4 ma	4K/1K split	100-20,000	+20	100	800
0-26	Transistor Int.	10,000 CT 4 ma	10,000 CT	100-20,000	+20	100	700
0-27	Transistor Int.	10,000 CT 4 ma	500/125 split	100-20,000	+20	100	750
0-28	Transistor Int.	50,000 CT 2 ma	500/125 split	100-20,000	+20	100	3200
0-29	Tr. Int. or chopper	100,000 CT 1 ma	500/125 split	100-20,000	+20	100	3200
0-30	Transistor Int.	500/125 split 20 ma	500/125 split	100-20,000		1w*	37
0-31	Transistor Int.	500/125 split 20 ma	150/37.5 split	100-20,000		1w*	35
0-32	Transistor Int.	500/125 split 20 ma	50/12.5 split	100-20,000		1w*	37
0-33	Transistor Int.	100/25 split 40 ma	40/10 split	100-20,000		1w*	9

OUTPUT TRANSFORMERS

0-8	Plate to line	15,000	50, 200/250, 500/600	30-20,000	+ 8	6.3	950
0-9	Plate to line	15,000, 4 ma	Same as 0-8	200-10,000	+ 8	6.3	950
0-10	PP to line	30,000 CT	Same as 0-8	30-20,000	+ 8	6.3	1300
0-20	Transistor to line	1500 CT 8 ma	500/125 split	100-20,000	+20	100	100
0-21	Transistor to voice coil	2000 CT 4 ma 4000 CT	8 16	100-20,000	+20	100	200
0-22	Transistor to voice coil	400 CT 20 ma 500 CT	3.2 4	100-20,000		1w*	35
0-37	Transistor to line	4K/1K split, 4 ma	600/150 split	100-20.000		1w*	395
0-38	Autotransformer Speaker matching	0, 4, 8, 16. ODC		100-20,000		1w*	0.9

INDUCTORS

0-13	Inductor	300 Hys @ 0 DC; 50 Hys @ 3 maDC; 6000 ohms
0-23	Inductor	7 Hys @ 3 maDC; 3.5 Hys @ 10 maDC; 230 ohms
0-24	Inductor	1.6 Hys @ 3 maDC; .8 Hys @ 10 maDC; 25 ohms
0-34	Split Inductor	Series connection: 60 Mhy @ 80 maDC; 4 ohms Parallel connection: 15 Mhy @ 160 maDC; 1 ohm
0-36	Split Inductor	Series connection: 1 Hy @ 20 maDC; 60 ohms Parallel connection: .25 Hy @ 40 maDC; 15 ohms

SHIELD

0-17	Hipermalloy shield, slip fit over ouncer, 1" O.D. provides 25 db shielding.

BRACKET

0-BR	Mounting bracket, (see illustration

* At 200 Hz, ¼ watt at 100 Hz.