


⊕ Hover to zoom



LSM6DSL click

PID: MIKROE-2731

Weight:

LSM6DSL click measures linear and angular velocity with six degrees of freedom. It carries the **LSM6DSL** high-performance 3-axis digital accelerometer and 3-axis digital gyroscope. The click is designed to run on a 3.3V power supply. LSM6DSL click communicates with the target microcontroller over SPI or I2C interface, with additional functionality provided by the INT pin on the mikroBUS™ line.

Quantity

1



Add to Cart



Looking for customized version of this product?



If you have other questions about this product contact us here.



LEAVE A MESSAGE




LEAVE A MESSAGE

Table of contents

1. **LSM6DSL inertial module features**
2. **Specifications**
3. **Pinout diagram**
4. **Jumpers and settings**
5. **Programming**
6. **Code snippet**
7. **Downloads**

LSM6DSL click measures linear and angular velocity with six degrees of freedom. It carries the **LSM6DSL** high-performance 3-axis digital accelerometer and 3-axis digital gyroscope. The click is designed to run on a 3.3V power supply. LSM6DSL click communicates with the target microcontroller over SPI or I2C interface, with additional functionality provided by the INT pin on the mikroBUS™ line.

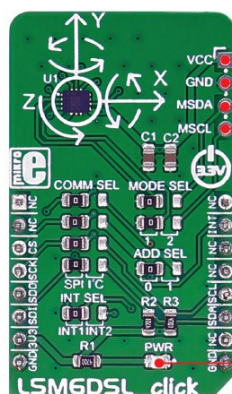


Power supply pin
Ground pin
I2C data pin for I2C slave
I2C clock pin for I2C slave

Power indication LED


Mode 1: I2C slave interface or SPI serial interface is available.

Mode 2: I2C slave interface, or SPI serial interface and I2C interface master for external sensor connections, are available.

Mode 1





Mode 2

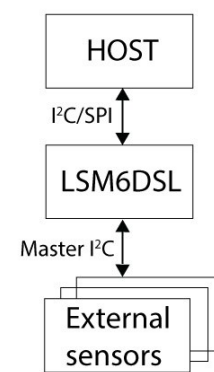

LSM6DSL inertial module features

The LSM6DSL is a system-in-package featuring a 3D digital accelerometer and a 3D digital gyroscope performing at **0.65 mA** in high-performance mode and enabling always-on low-power features for an optimal motion experience.

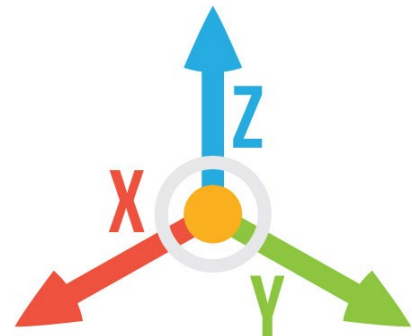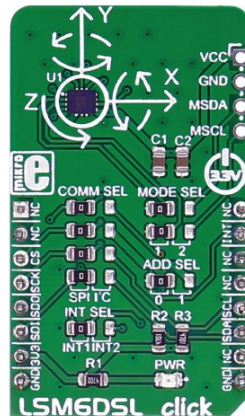

The event-detection interrupts enable efficient and reliable motion tracking and contextual awareness, implementing hardware recognition of free-fall events, 6D orientation, click and double-click sensing, activity or inactivity, and wakeup events

The LSM6DSL has a full-scale acceleration range of $\pm 2/\pm 4/\pm 8/\pm 16$ g and an angular rate range of $\pm 125/\pm 245/\pm 500/\pm 1000/\pm 2000$ dps (degrees per second).


Specifications

Type	Motion
Applications	Motion tracking and gesture detection, indoor navigation, vibration monitoring and compensation, etc.
On-board modules	LSM6DSL
Key Features	Power consumption: 0.4 mA in combo normal and 0.65 mA in combo high-performance mode; hard, soft ironing for external magnetic sensor corrections

Interface	I2C,SPI
Input Voltage	3.3V
Click board size	M (42.9 x 25.4 mm)

Pinout diagram

This table shows how the pinout on **LSM6DSL click** corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin					Pin	Notes
	NC	1	AN	PWM	16	NC	
	NC	2	RST	INT	15	INT	Programmable interrupt
Chip select	CS	3	CS	TX	14	NC	
SPI clock	SCK	4	SCK	RX	13	NC	
Master input slave output	MISO	5	MISO	SCL	12	SCL	I2C clock
Master output slave input	MOSI	6	MOSI	SDA	11	SDA	I2C data
Power supply	+3.3V	7	3.3V	5V	10	NC	
Ground	GND	8	GND	GND	9	GND	Ground

Jumpers and settings

Designator	Name	Default Position	Default Option	Description
JP1	COMM SEL	Left	SPI	Communication Interface Selection SPI/I2C, left position SPI, right position I2C
JP2	COMM SEL	Left	SPI	Communication Interface Selection SPI/I2C, left position SPI, right position I2C
JP3	COMM SEL	Left	SPI	Communication Interface Selection SPI/I2C, left position SPI, right position I2C
JP4	INT SEL	Left	INT1	Interrupt selection INT1/INT2, left position INT1, right position INT2

JP5	COMM SEL	Left	SPI	Communication Interface Selection SPI/I2C, left position SPI, right position I2C
JP6	MODE SEL	Left	1	Mode Selection 1/2, left position 1, right position 2
JP7	MODE SEL	Left	1	Mode Selection 1/2, left position 1, right position 2
JP8	ADD SEL	Left	0	I2C slave address selection 0/1, left position 0, right position 1

Programming

Code examples for LSM6DSL click, written for MikroElektronika hardware and compilers are available on Libstock.

Code snippet

The following code snippet initializes the module, the driver, and peripherals, and then outputs the measured data to UART every two seconds.

```

01 void main()
02 {
03     char txt [100];
04     float x,y,z;
05
06     systemInit();
07     LSM6DSL_initDriver(SPI3_Write, SPI3_Read);
08     UART1_Write_Text ("rnInitialized");
09
10     /*
11      * Starts measurements for acceleration and rotation at specified
12      * rate (104 HZ) and selected full-scale (+-2G, +-245DPS).
13      */
14     LSM6DSL_configureRead (CONFIG_ACCELERATION, ODR_104_HZ | FULLSCALE_A_2);
15     LSM6DSL_configureRead (CONFIG_ROTATION, ODR_104_HZ | FULLSCALE_R_245);
16     while( 1 )
17     {
18         UART1_Write_Text ("rnAcceleration values in mili-Gs:");
19         LSM6DSL_readAccelerationXYZ (&x, &y, &z, FULLSCALE_A_2);
20         sprintf (txt, "rnX: %.2f, t Y: %.2f, t Z: %.2f", x,y,z);
21         Uart1_Write_Text (txt);
22
23         UART1_Write_Text ("rnRotation values in degrees per second:");
24         LSM6DSL_readRotationXYZ (&x, &y, &z, FULLSCALE_R_245);
25         //Values are read in mili-degrees per second, so they need to be di
26         vided by 1000
27         sprintf (txt,
28             "rnPitch: %.2f, t Roll: %.2f, t Yaw: %.2f", x/1000,y/1000,z/1000);
29         Uart1_Write_Text (txt);
30         delay_ms (2000);
31     }
32 }

```

Downloads



mikroBUS™ Standard specification [↗](#)



LSM6DSL click schematic



LSM6DSL datasheet



LibStock: LSM6DSL click library [↗](#)

YOU MIGHT ALSO NEED

PRODUCTS IN THE SAME CATEGORY

Subscribe to our newsletter:

Email address



Follow us on:



PRODUCT LINES

[click Boards™](#) | [Compilers](#) | [Development Boards / Kits](#) | [Smart Displays](#) |

TOOLCHAINS

[PIC](#) | [dsPIC](#) | [PIC32](#) | [ARM](#) | [AVR](#) | [FT90x](#) | [8051](#)

COMPANY

[Distributors](#) | [News](#) | [About us](#) | [Contact](#) | [Internship](#) | [Jobs](#)

RESOURCES

[mikroBus™](#) | [Hexiwear™](#) | [Shop](#) | [Learn](#) | [Libstock](#) | [Forum](#) | [Helpdesk](#)

Copyright © 1998 - 2017 MikroElektronika d.o.o. All rights reserved | [Terms of use](#)

Help us improve the page and choose one option if you would like to see more of it:

- ☐ More multimedia
- ☐ More software examples
- ☐ Add your suggestion
- ☐ More technical documentation

Send >