


PCB layout for the HU-017B FM Radio V5.0. The board features a central IC (U1), a 4-digit 7-segment display (U7), a speaker (U4), and various passive components including resistors (R1-R16), capacitors (C1-C9), and a potentiometer (U9). It includes a DC power input, a speaker output (P5), and a serial interface (U6). The board is branded with 'HXFB' in a stylized font.

Schematic

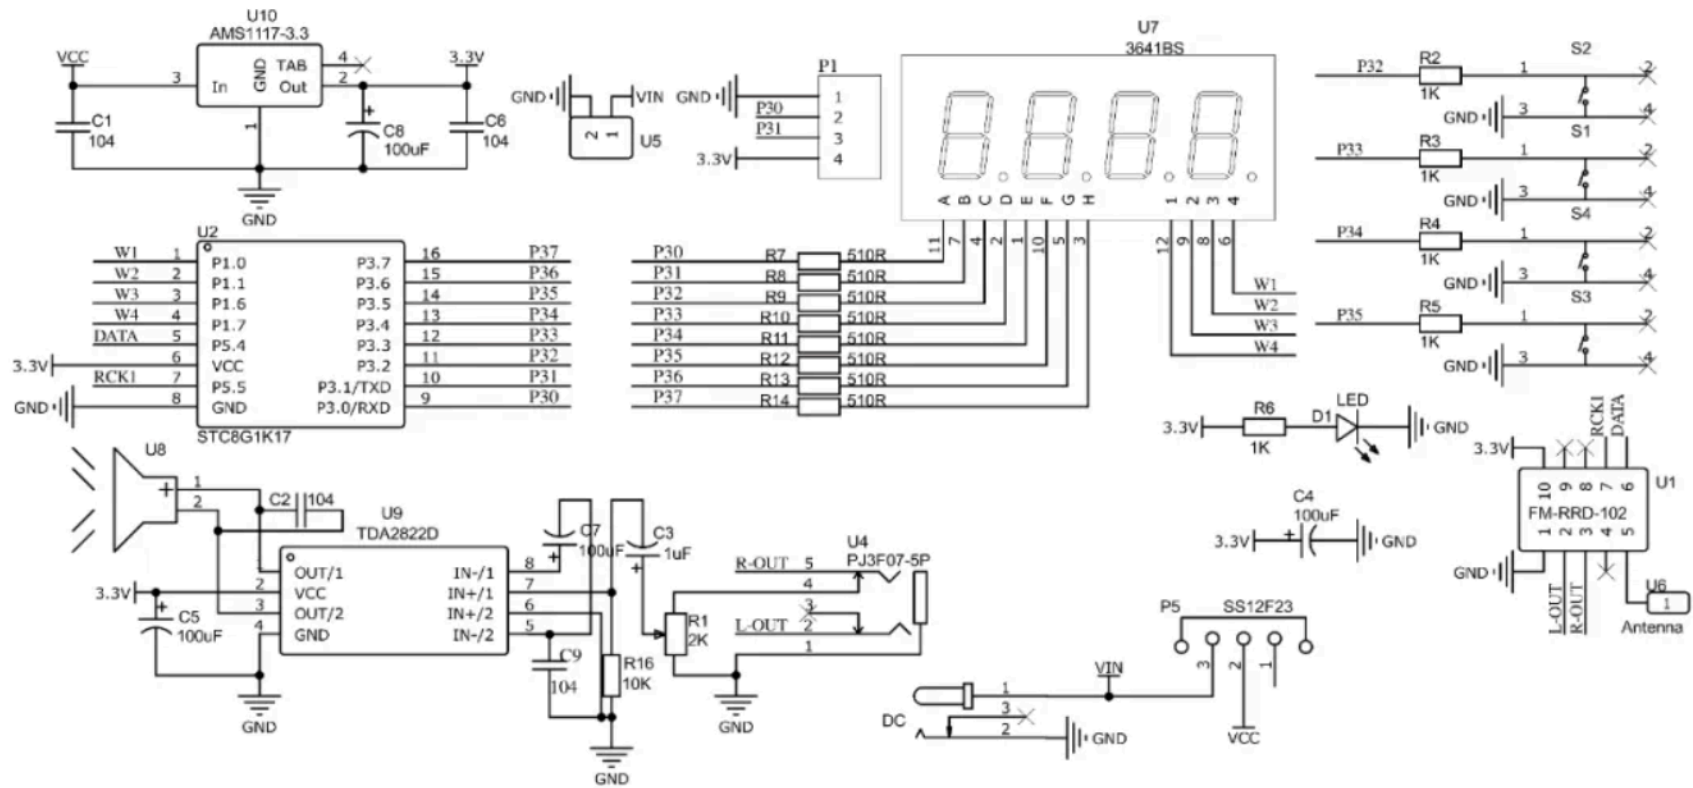

BOM

序号 /Number	名称	Name	标号/Lable	数量 /Number	备注 /Remarks
1	数码管	Digital tube	U7	1	/
2	直插电阻 10K	Direct insertion resistor 10K	R16	1	/
3	直插电阻 1K	Direct insertion resistor 1K	R2、R3、R4、R5、R6	5	/
4	直插电阻 510	Direct insertion resistor 510K	R7、R8、R9、R10、R11、R12、R13、R14	8	/
5	拨动开关	Toggle Switch	P5	1	/
6	USB 插座	USB socket	DC	1	/
7	收音天线	Radio antenna	U6	1	/
8	M2 螺丝	M2 screw	/	1	/
9	M2 螺母	M2 nut	/	1	/
10	音频插座	Audio jack	U4	1	/
11	6*6*12.5 按键	6*6*12.5 key	S1、S2、S3、S4	4	/
12	按键帽	Key cap	S1、S2、S3、S4	4	/
13	STC8G1K17	STC8G1K17	U2	1	/
14	TDA2822	TDA2822	U9	1	/
15	电解电容 100uF	Electrolytic capacitor 100uF	C4、C5、C7、C8	4	/
16	电解电容 1uF	Electrolytic capacitor 1uF	C3	1	/
17	喇叭	Speaker	U8	1	/
18	RDA5807 模块	RDA5807 module	U1	1	/
19	电位器 200K	Potentiometer 200K	R1	1	/
20	瓷片电容 104	Ceramic capacitor 104	C1、C2、C6、C9	4	/
21	红色发光二极管	Red led	D1	1	/
22	AMS1117-3.3V	AMS1117-3.3V	U10	1	/
23	8P IC 座	8P IC socket	U9	1	/
24	16P IC 座	8P IC socket	U2	1	/
25	4P 红黑连接线	4P red and black wire	/	1	
26	电池弹片	Battery shrapnel	/	1	选配 Optional
27	电源线	Power line	/	1	/
28	PCB	PCB	/	1	/
29	说明书	Instructions	/	1	/
30	外壳	Housing	/	1	选配 Optional
31	螺丝包	Screw pack	/	1	选配 Optional