# Integrated Microwave Motion Sensor

## Product Specifications

The integrated sensor by TCP is an innovative motion sensor that is housed behind the lens of our product lines. This discrete design allows for full sensor functionality without adding any size to the compatible fixtures.

These sensors come pre-installed into the luminaire allowing you to combine easy fixture installation with the energy savings that come from having a sensor. There are two versions of the integrated sensor to provide maximum compatibility with TCP's product offerings. See below for a list of compatible product lines.

## Reasons to choose the Integrated Microwave Motion Sensor from TCP

- Automatic switching based on detected motion.
- Zero-crossing point operation helps protect the sensor against in-rush current.
- Pre-Installation means that there is no added time to install these fixtures. Detection area, time delay and daylight threshold can be precisely set via remote control. *Remote sold separately.
- Detection area, time delay, and bi-level dimming can be conveniently set via remote. *Remote sold separately.
- Wide detection area and options for varying ceiling heights.
- 5.8GHz microwave module provides superior detection through the installed lens.

## Compatible Product Lines

- QHB Series High Bay
- GPS Series General Purpose Strip
- DT Series Panel
- VTF Series Vapor Tight Strip

**TCP®**
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com

c UL us LISTED

5 YEAR WARRANTY

# Integrated Microwave Motion Sensor

## Specifications

| | |
|---|---|
| Operating voltage | 120-277Vac, 50/60Hz |
| HF system | 5.8GHz ± 7.5MHz, ISM wave band |
| Power consumption | ≤0.3mW (Standby) |
| Detection zone | Max.(D x H): 16m x 15m |
| Detection sensitivity | 25% / 50% / 75% / 100% |
| Hold time | 5s / 30s / 1min / 3min / 20min / 30min |
| Daylight sensor | 2 Lux / 10 Lux / 30 Lux / 50 Lux /80 Lux / 120 Lux / Disable |
| Mounting height | 15m Max. |
| Motion detection | 0.5-1ms |
| Detection angle | 150°(wall installation)<br>360°(ceiling installation) |
| Operating temperature | -20°C to 60°C |
| IP rating | IP65 |

*Remote sold separately

Remote Part Number : ISREMOTE

## Sensor Coverage

### High Bay Version

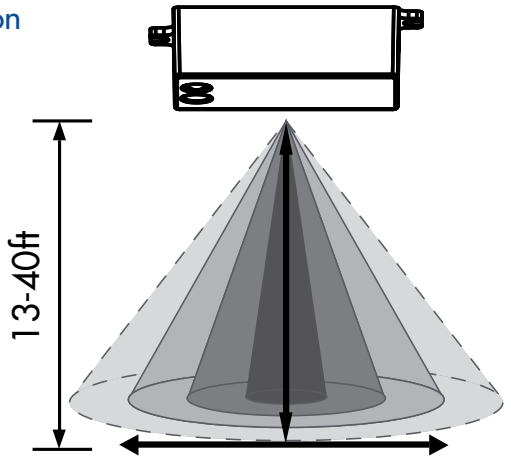


Height of installation 13-40ft

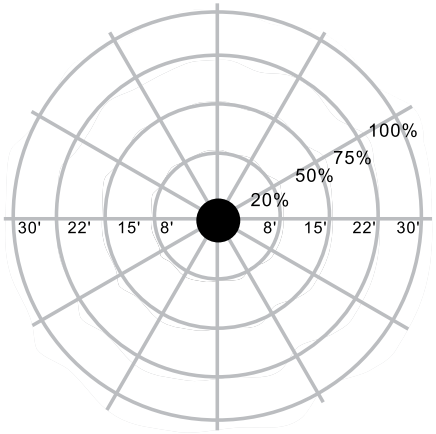


### Low Bay/Panel Version

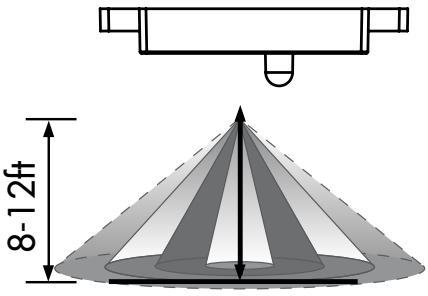


Height of installation 8-12ft

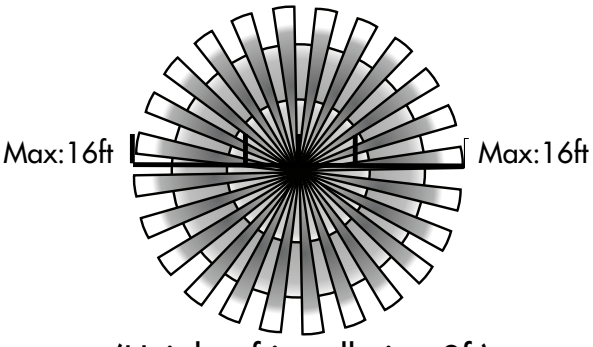


(Height of installation 8ft)
Detection range

**TCP®**
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com

c UL US LISTED

5 YEAR WARRANTY

# Integrated Microwave Motion Sensor

## Remote Instructions

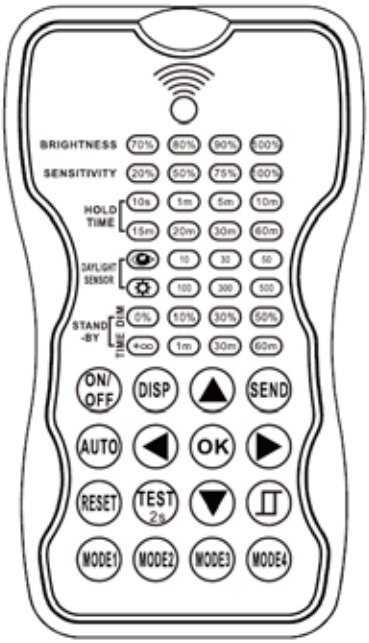


| LED | DESCRIPTION | LED | DESCRIPTION |
|---|---|---|---|
| BRIGHTNESS | Set the brightness level when occupancy is sensed and luminaire is switched on. | | Set the current lux value as the daylight threshold. This feature enables the daylight sensor to function in all applications. *In applicable sensors only |
| SENSITIVITY | Set the occupancy sensing sensitivity of the sensor. | | The daylight sensor is turned off and the sensor functions in standard or bi-level dimming mode. |
| HOLD TIME | The time the sensor remains at full brightness before turning off or entering standby mode. | STANDBY DIM | To set the bi-level dimming after the initial hold time. Setting standby dim level at 0% means the device will turn off after the initial hold time (Standard mode). Setting standby dim level to the other provided options will place the device in bi-level mode. |
| DAYLIGHT SENSOR | Preset threshold levels for the daylight sensing functions. *In applicable sensors only | STANDBY TIME | Represents the time that the sensor will keep the light at low dim level after the HOLD TIME has elapsed. |

**TCP®**
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com

c UL US LISTED

5 YEAR WARRANTY

# Integrated Microwave Motion Sensor

## Button Operation

| BUTTON | DESCRIPTION | BUTTON | DESCRIPTION |
|---|---|---|---|
| ON/ OFF | Press the ON/OFF button, the light goes to permanent on or permanent off mode, and the sensor is disabled (Must press the AUTO button to quit this mode for setting). | AUTO | Press AUTO button, the sensor starts to function and all settings remain the same as the latest status before the light is switched on/off. |
| DISP | Display the current/latest setting parameters in LED indicators (the LED indicators will turn on for showing the setting parameters). | TEST 2s | The button TEST 2s is for testing purpose sensitivity only after you choose sensitivity thresholds, then you press the TEST 2s button. The sensor goes to test mode (hold time is only 2s) automatically, meanwhile the standby period and daylight sensor are disabled. Press AUTO button to quit from this mode. |
| RESET | Press RESET button, all settings go back the settings of the dip switch in sensor. | | |
| ▲ ▼ | Select active parameter to edit after selecting DISP. The active function will flash when selected. | ◀ ▶ | Navigate to LEFT and RIGHT to choose between options of the selected parameters in LED indicators. |
| OK | Select OK to save the selected settings to the remote.<br>*Settings will be saved to the remote but will still need sent to the device | | |
| SEND | Press the SEND button to upload the current settings to the fixture (Press DISP to see current settings.) The fixture will flash on/off to confirm the settings have been received. | | Open and close smart daylight sensor. Press UP or DOWN, enter in the setting condition, the parameter LEDs of remote control will flash to be selected, press this button to open or close smart daylight sensor.<br>*In applicable sensors only |
| MODE1 MODE2 MODE3 MODE4 | 4 scene modes with preset parameters which are available to be changed and saved in modes. | | |

**TCP®**
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com
©TCP FEB 2024/WF533154

c UL US LISTED

5 YEAR WARRANTY

# TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 30 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

| | |
|---|---|
| Sales: | Catalog Number: |
| Date: | Type: |
| Model: | Notes: |
| Project: | |
| Rep: | |

TCP® we know light.™

For more information on the quality and care TCP can deliver, call us at 800.324.1496 or visit tcpi.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516