MJTP SERIES 6MM THRU-HOLE MTG. TACT SWITCHES

FEATURES

- Numerous single pole-single throw momentary configurations.
- Excellent tactile feed-back (Snap dome).
- Ultra-compact size.
- Long operating life for high reliability.
- Molded-in terminals minimize wicking of flux or solder.

MATERIALS

Case: Thermoplastic, color black. UL94HB Standard.

Thermoplastic

Gold plating avail- Actuator:

Cover/Bracket:

ket: PET film, tin plated brass or stainless steel.

able on contacts & Terminals: Silver plated brass.

Shorting Contact: Phosphor bronze or stainless steel with silver plating.

L.E.D. rating: Forward voltage- 2.1 V (3.0 V Max.). Cont. fwd. current 20mA max.@ 25°C.

GENERAL SPECIFICATIONS

ELECTRICALS

- consult factory.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Contact rating: 50 mA @ 12 VDC

Insulation resistance: 100 megohms min. (100 VDC)

Dielectric withstanding voltage: 250 VAC for 1 minute

Contact resistance: 100 milliohms max. @ 5 VDC, 10 mA

Electrical life: 100,000 cycles min. (except models MJTP1243 & 1250- 50,000 cycles)

1,000,000 cycles available - consult factory

Contact bounce: less than 10 msec.

MECHANICALS, THERMALS, ENVIRONMENTALS

Plunger travel: .010"+ .008", - .004" (0,25 +0,2, -0,1 mm)

Actuation force: 160 grams ±30 grams

Operating temperature range: -20°C to +70°C

Storage temperature range: -30°C to +80°C for 96 hours

Shock resistance: 30G per method 213, MIL-STD-202 Vibration resistance: passes method 201, MIL-STD-202

SOLDERING (note - non-washable except for models indicated 'process compatible' below).


IR reflow soldering: 240°C max. for 20 seconds max. Wave soldering: 255°C max. for 5 seconds max.


Hand soldering: 320°C max. for 3.5 seconds max. (40 watt iron max.)

MJTP1105T

Right angle, grounding









Caps available see end of section. Bulk packaged.

US # MJTP1109 EU # PHAP3350

Process compatible, grounding









US Model	Dim.	EU Model
No.	L (In./mm)	No.
MJTP1109	.197 (5.0)	PHAP3350
MJTP1109A	.354 (9.0)	PHAP3350A
MJTP1109B	.512 (13.0)	PHAP3350B

Bulk packaged.

US # MJTP1117 EU#PHAP3363 .057 (1.45) .232 (5.9) Right angle, grounding .059 (1.5) Bulk packaged. New! **US # MJTP1119** .102 (2.6) **EU # PHAP3351** .028 (0.7) Process compatible .039 **US Model** Dim. **EU Model** L (in./mm) No. **MJTP1119** .197 (5.0) **PHAP3351** ø .118 (3.0) .283 (7.2) .311 .358 (7.9) (9.1) **MJTP1119A PHAP3351A** .354 (9.0) **MJTP1119B** .512 (13.0) **PHAP3351B** Bulk packaged. .197 (5.0) New! .311 (7.9) **US # MJTP1129 EU # PHAP1152** -1 .138 (3.5) Right angle, grounding, .118 (3.0) process .315 (8.0) compatible








US Model	Dim.	EU Model
No.	L (in./mm)	No.
MJTP1129	.171 (4.35)	PHAP3352
MJTP1129A	.329 (8.35)	PHAP3352A
MJTP1129B	.486 (12.35)	PHAP3352B

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Bulk packaged.

US # MJTP1141 EU # PHAP3307 Long terminals




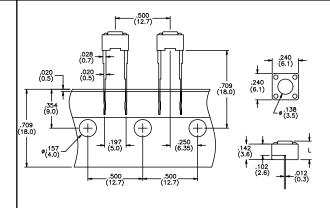

US Model	Dim.	EU Model
No.	L (in./mm)	No.
MJTP1141	.169 (4.3)	PHAP3307
MJTP1141A	.197 (5.0)	PHAP3307A

Packaged on tape. Note: other models available with this tape packaging - consult factory.



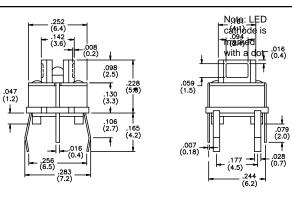



US Model	L.E.D.	EU Model
No.	Color	No.
MJTP1193	No L.E.D.	PHAP3308
MJTP11936	Red	PHAP3308R
MJTP11935	Yellow	PHAP3308Y
MJTP11933	Green	PHAP3308G

Caps available with lens see end of section. Bulk packaged.

US # MJTP1230 EU # PHAP3301









US Model	Dim.	EU Model
No.	L (in./mm)	No.
MJTP1230	.170 (4,3)	PHAP3301
MJTP1230A	.197 (5,0)	PHAP3301A
MJTP1230B	.374 (9,5)	PHAP3301B
MJTP1230C	.315 (8,0)	PHAP3301C
MJTP1230D	.512 (13,0)	PHAP3301D
MJTP1230E	.287 (7,3)	PHAP3301E
MJTP1230F	.335 (8,5)	PHAP3301F
MJTP1230G	.275 (7,0)	N/A

Bulk packaged.

US # MJTP1232 EU # PHAP3302 Grounding









US Model	Dim.	EU Model
No.	L (in./mm)	No.
MJTP1232	.170 (4,3)	PHAP3302
MJTP1232A	.197 (5,0)	PHAP3302A
MJTP1232B	.374 (9,5)	PHAP3302B
MJTP1232C	.315 (8,0)	PHAP3302C
MJTP1232D	.512 (13,0)	PHAP3302D
MJTP1232E	.287 (7,3)	PHAP3302E
MJTP1232F	.335 (8,5)	PHAP3302F
MJTP1232G	.275 (7,0)	PHAP3302G

Bulk packaged.

US # MJTP1234 EU # PHAP3303









US Model	Dim.	EU Model
No.	L (in./mm)	No.
MJTP1234	.094 (2,4)	PHAP3303
MJTP1234A	.110 (2,8)	PHAP3303A

Caps available see end of section. Bulk packaged.

US # MJTP1236 EU # PHAP3305 Right angle, grounding








US Model	Dim.	EU Model
No.	L (in./mm)	No.
MJTP1236	.124 (3,1)	PHAP3305
MJTP1236A	.152 (3,9)	PHAP3305A
MJTP1236B	.329 (8,4)	PHAP3305B
MJTP1236C	.270 (6,9)	PHAP3305C
MJTP1236D	.466 (11,9)	PHAP3305D
MJTP1236E	.244 (6,2)	PHAP3305E
MJTP1236F	.289 (7,3)	N/A
MJTP1236G	.230 (5,8)	N/A
	Bulk packag	ied.

US # MJTP1243 & MJTP1250







US # Model	Dim.	Dim.	
No.	L1 (in./mm)	L (in./mm)	
MJTP1243	.169 (4,3)	.307 (7,8)	
MJTP1250	.197 (5,0)	.335 (8,5)	


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Bulk packaged.

US # MJTP2205 EU # PHAP3306 2 switch vertical






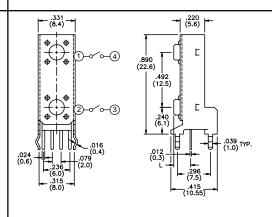

US Model	Dim.		EU Model
No.	L (in	./mm)	No.
MJTP2205	.124	(3,15)	PHAP3306
MJTP2205A	.152	(3,85)	PHAP3306A
MJTP2205B	.329	(8,35)	PHAP3306B
MJTP2205C	.270	(6,85)	PHAP3306C
MJTP2205D	.466	(11,85)	PHAP3306D
MJTP2205E	.242	(6,15)	PHAP3306E

Bulk packaged.

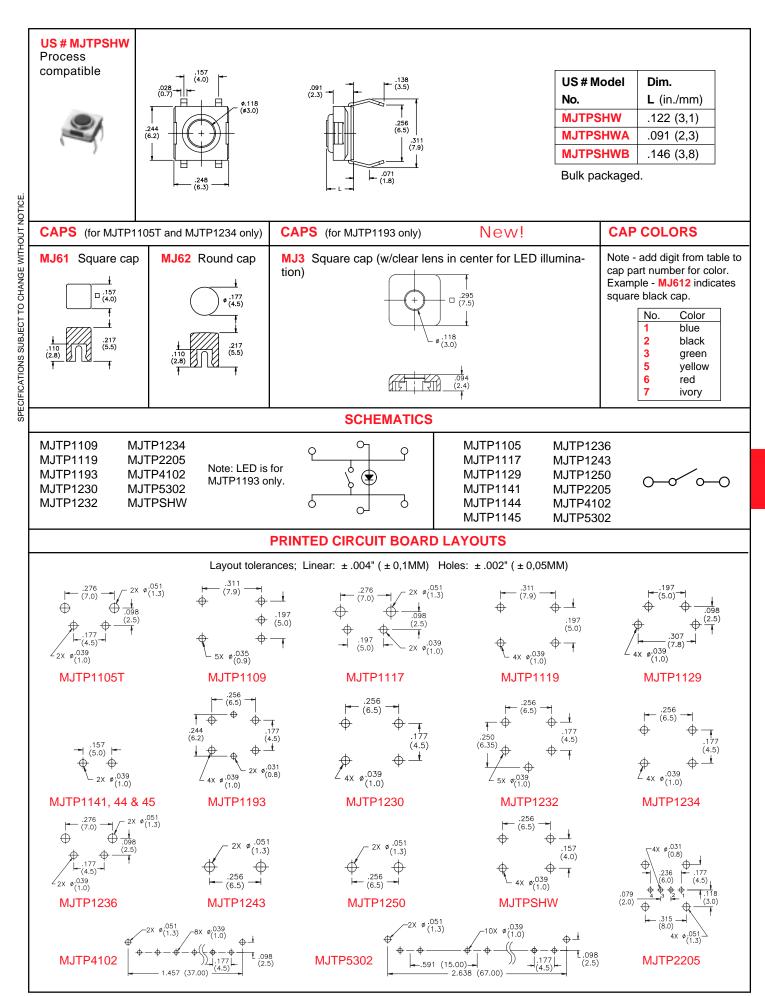

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Apem:

MJTP1129 MJTP1119 MJTPSHW MJTPSHWB MJTPSHWA MJTP11933 (BULK) MJTP1230D MJTP1230E

MJTP1230 MJTP1234 MJTP1250 MJTP1141 MJTP1164TR MJTP1119A MJTP1105T MJTP1109 MJTP1109A

MJTP1109B MJTP1117 MJTP1119B MJTP1129A MJTP1129B MJTP1141A MJTP1144 MJTP1144A MJTP1193

MJTP11935 MJTP11936 MJTP1230A MJTP1230B MJTP1230C MJTP1230F MJTP1230G MJTP1232

MJTP1232A MJTP1232AL MJTP1232B MJTP1232C MJTP1232D MJTP1232E MJTP1232F MJTP1232G

MJTP1234A MJTP1234G MJTP1236 MJTP1236A MJTP1236B MJTP1236BV0 MJTP1236C MJTP1236D

MJTP1236E MJTP1236F MJTP1236G MJTP1243 MJTP2205 MJTP2205A MJTP2205B MJTP2205C MJTP2205D

MJTP2205E MJTP1236CBLK MJ625 MJ621 MJ32 MJ37 MJ36 MJ35 MJ33 MJ626 MJ623