DATASHEET
Variable Speed Drives

Product coding	: CFW500A02P6S2NB20
Product code	: 11575736
Product reference	: CFW500
Accessory module (control)	: CFW500-IOS

Basic data

Power supply	: 200-240 V
Input minimum-maximum voltage	: 170-264 V
- In	: 1
- Out	: 3

Supply voltage range	200-240 V	
Overload cicle	Normal Overload (ND)	Heavy Overload (HD)
Rated current (HD)	2.6	2.6
Overload current for 60 sec (HD)	4	4
Overload current for 3 sec (HD)	5	5

Maximum applicable motor:

Voltage/Frequency	Power (HP/kW) [1]	
	Normal Overload (ND)	Heavy Overload (HD)
220V / 50Hz	Not applicable	0,75 / 0,55
220V / 60Hz	Not applicable	0,5 / 0,37
230V / 50Hz	Not applicable	0,75 / 0,55
230V / 60Hz	Not applicable	0,5 / 0,37
Not applicable	Not applicable	Not applicable
Not applicable	Not applicable	Not applicable
Not applicable	Not applicable	Not applicable
Not applicable	Not applicable	Not applicable

Accessory module (control)	: CFW500-IOS
Dynamic braking [2]	: Standard without braking
External electronic suply 24Vcc	: Not available
Safety Stop	: Not available
Internal RFI filter	: Without filter
External RFI filter	: Not available
Link Inductor	: No
Memory card	: Not included in the product
USB port	: Only with plug-in
Line frequency	: 50/60Hz
Line frequency range (minimum - maximum)	: 48-62 Hz
Phase unbalance	: less or equal to 3% of input rated line voltage
Transient voltage and overvoltage	: Category III
Single-phase input current [3]	: 6,5 A
Three-phase input current [3]	: Not applicable
Power factor	: 0,70
Displacement factor	: 0,98
Rated efficiency	: ≥ 97%
Maximum connections (power up cycles - on/off) per hour	: 10 (1 each 6 minutes)
DC power supply	: Not allow
Standard switching frequency	: 5 kHz
Selectable switching frequency	: 2,5 and 15 kHz
Real-time clock	: Not available
COPY Function	: Yes, by MMF

Dissipated power:

Mounting type	Overload	
	ND	HD
Surface	30 W	30 W
Flange	Not applicable	Not applicable

Output voltage	: 24 Vcc
Maximum capacity	: 150 mA
Power supply	: Switched-mode power supply
Control method	: V/f, VVW, Sensorless and Encoder
Encoder interface	: Only with plug-in
Control output frequency	: 0-500 Hz
Frequency resolution	: 0,015 Hz
- Speed resolution	: 1% of rated speed
- Speed range	: 1:20

- Speed resolution	: 1% of rated speed
- Speed range	: 1:30
- Speed resolution	: 0,5% of rated speed
- Speed range	: 1:100
- Speed resolution	: 0,1% of nominal speed
- Speed range	: Up to 0 rpm

Quantity (standard)	: 1
Levels	: 0-10V, 0-20mA and 4-20mA
Impedance for voltage input	: 100 kΩ
Impedance for current input	: 500 Ω
Function	: Programmable
Maximum allowed voltage	: 30 Vcc

Quantity (standard)	: 1
Activation	: Active low and high
Maximum low level	: 5 V (low) e 15 V (high)
Minimum high level	: 9 V (low) e 20 V (high)
Input current	: 4,5 mA
Maximum input current	: 5,5 mA
Function	: Programmable
Maximum allowed voltage	: 30 Vcc

Analog outputs

Analogic outputs - Quantity (standard)	: 1
Levels	: 0 to 10V, 0 to 20mA and 4 to 20mA
RL for voltage output	: 10 kΩ
RL for current output	: 500 Ω
Function	: Programmable

Digital outputs - Quantity (standard)	: 1 NO/NC relay and 1 transistor
Maximum voltage	: 240 Vca and 24 Vcc
Maximum current	: 0,5 A and 150 mA
Function	: Programmable

- Modbus-RTU (with accessory: Any plug-in module)
- Modbus/TCP (with accessory CFW500-CEMB-TCP)
- Profibus DP (with accessory: CFW500-CPDP)
- Profibus DPV1 (with accessory: CFW500-CPDP)
- Profinet (with accessory CFW500-CEPN-IO)
- CANopen (with accessory: CFW500-CCAN)
- DeviceNet (with accessory: CFW500-CCAN)
- EtherNet/IP (with accessory CFW500-CETH-IP)
- EtherCAT (Not available)
- BACnet (Not aplicable)

- Output phase-phase overcurrente/Short
- Overcurrent/Short circuit phase-ground
- Under/Overvoltage in power
- Heat sink overtemperature
- Motor overload
- IGBT's modules overload
- Fault/External alarm
- Programming error

Avaliability	: Included in the product
Installation	: Fixed HMI
Number of HMI buttons	: 9
Display	: Numeric LCD
Indication accuracy	: 5% of rated current
Speed resolution	: 0,1 Hz
Standard HMI degree of protection	: IP20
HMI battery type	: Not applicable
HMI battery life expectancy	: Not applicable
Remote HMI type	: Accessory
Remote HMI frame	: Not applicable
Remote HMI degree of protection	: IP54

Enclosure	: IP20
Degree of pollution	: 2

RoHS	: Yes
Conformal Coating	: 3C2

- Size	: A
- Height	: 189 mm / 7.4 in
- Width	: 75 mm / 2.95 in

- Depth : 150 mm / 5.91 in
- Weight : 0,8 kg / 1.8 lb

Mechanical Installation

Mounting position : Surface or DIN rail
Fixing screw : M4
Tightening torque : 2 N.m / 1.48 lb.ft
Allows side-by-side assembly : Yes, maximum ambient temperature 40°C
- Top : 15 mm / 0.59 in
- Bottom : 40 mm / 1.57 in
- Front : 30 mm / 1.18 in
- Side : 10 mm / 0.39 in

Cable gauges and tightening torques:

	1,5 mm² (16 AWG)	0,5 N.m / 0.37 lb.ft
	Not applicable	0,5 N.m / 0.37 lb.ft
	2,5 mm² (14 AWG)	0,5 N.m / 0.37 lb.ft
	0,5 to 1,5 mm² (20 to 14 AWG)	0,5 N.m / 0.37 lb.ft

SoftPLC : Yes, incorporated
Maximum breaking current : Not available
Minimum resistance for the brake resistor : Not available
Recommended aR fuse : FNH00-20K-A
Recommended circuit breaker : MPW18-3-U010
Disconnect switch : Not applicable
Motor coupling box : Not applicable

	- - - - - - -
	- EN 61800-3 - Adjustable speed electrical power drive systems - Part 3: EMC product standard including specific test methods. - EN 55011 - Limits and methods of measurement of radio disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment. - CISPR 11 - Industrial, scientific and medical (ISM) radio-frequency equipment - Electromagnetic disturbance characteristics - Limits and methods of measurement. - EN 61000-4-2 - Electromagnetic compatibility (EMC) - Part 4: Testing and measurement techniques - Section 2: Electrostatic discharge immunity test. - - - -
	- EN 60529 e UL 50

Certifications

Notes

1) Motor power is orientative, valid for standard WEG Motors of IV poles. The correct sizing must be done according to the nominal current of the motor used, which must be less than or equal to the rated output current of the inverter;
2) Braking resistor is not included;
3) Considering minimum line impedance of 1%;
4) For more information, refer to the user manual of CFW500;
5) All images are merely illustrative.
6) For operation with switching frequency above nominal, apply derating to the output current (refer to the user manual).

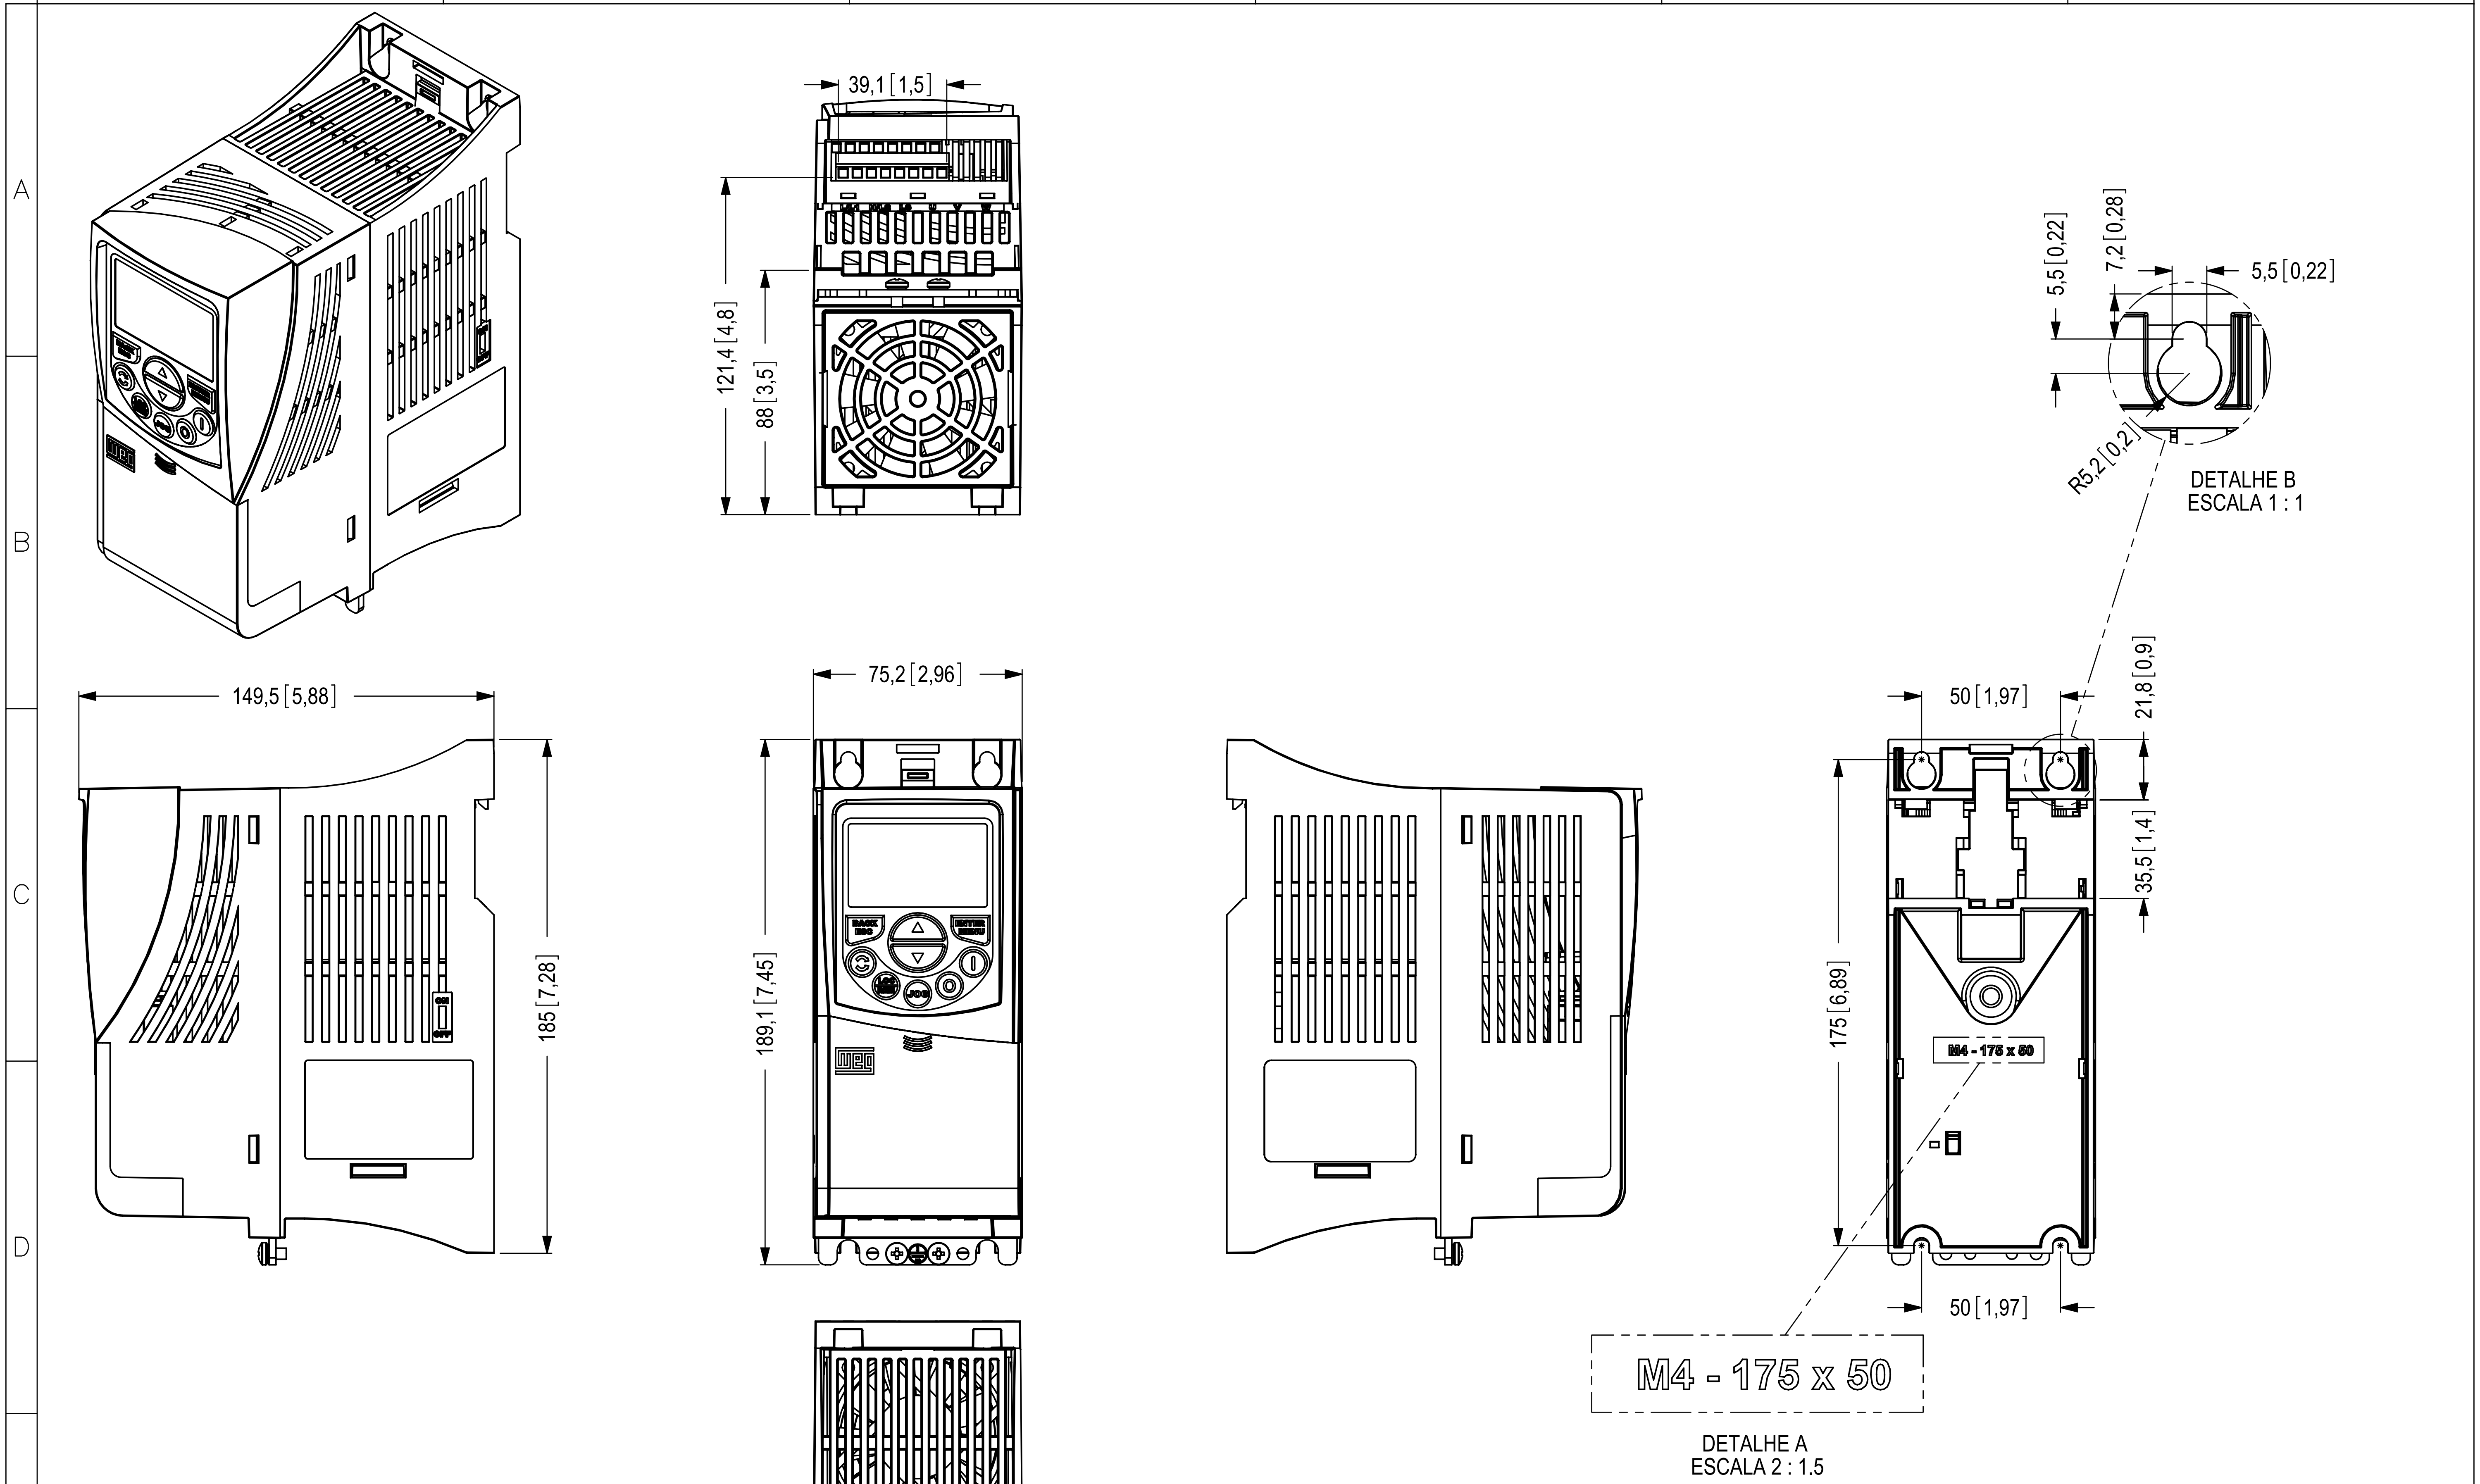

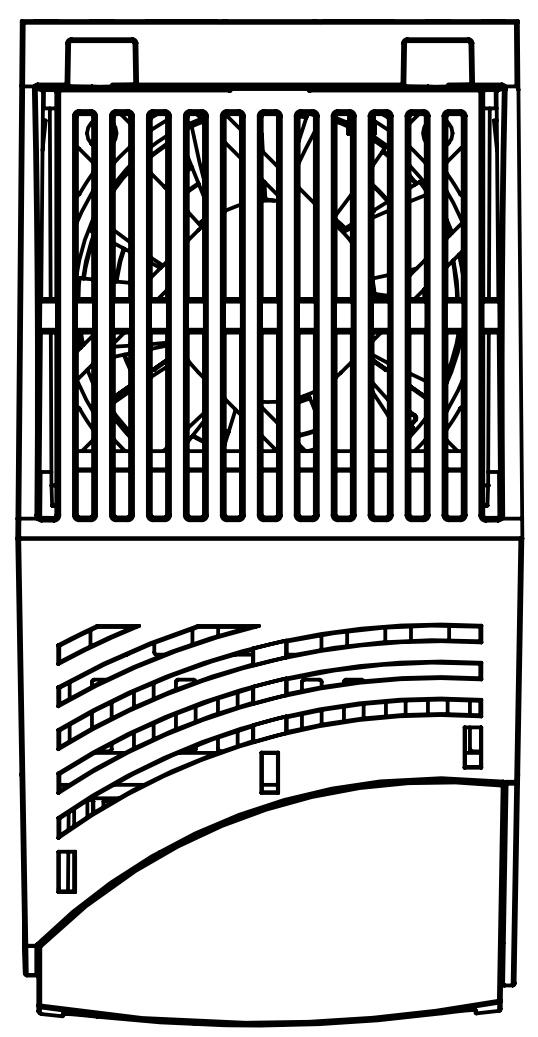

MASSA BRUTA/GROSS WEIGHT	VER MANUAL/DATA SHEET	MASSA LÍQUIDA/NET WEIGHT	VER MANUAL/DATA SHEET	ESCALA/SCALE	

ECM	LOC	RESUMO DE MODIFICAÇÕES SUMMARY OF MODIFICATIONS	EXECUTADO EXECUTED	VERIFICADO CHECKED	LIBERADO RELEASED	DATA DATE	VER
500000500014		ELABORAÇÃO INICIAL	JONASD	SABRINA	JUAREZ	19/09/2011	00

EXEC	JONASD	CFW500
VERIF/CHECKED	SABRINA	SIZE A
LIBER/RELEASED	JUAREZ	IP20
DT LIBER/REL DT	19/09/2011	

10003577004

FOL/SHEET 1 / 1

SWD - A3