



DDA Strategy 3 — Pareto-Adaptive Split Selection (Llama2-13B)
 $\lambda=350$ tok/s | Only 2 Pareto-efficient splits: $N_L=6$ (tput-opt) $\leftrightarrow$ $N_L=10$ (SLO-opt), crossover at $\alpha=0.143$


(a) Workload Mix $\alpha(t)$
Ramp 0.05 $\rightarrow$ 0.35 $\rightarrow$ 0.05

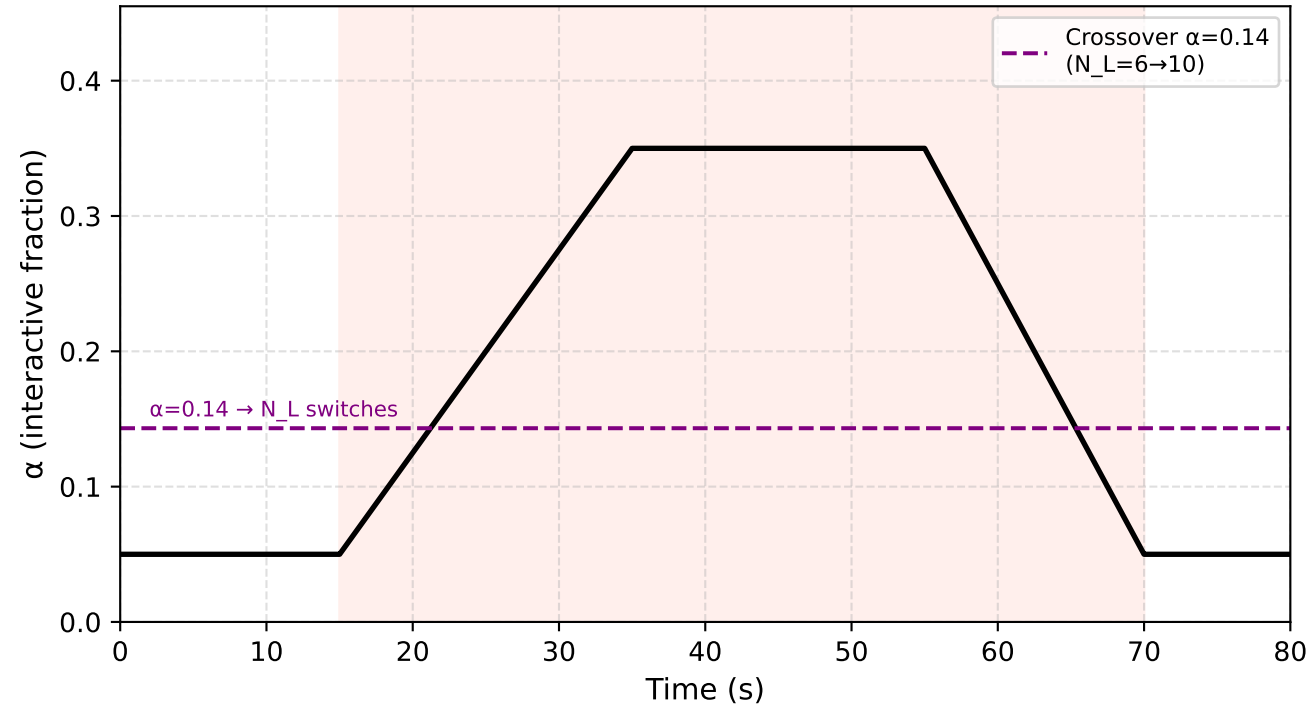

(b) System Throughput
 $S3 = S1$ at low α ; $= S2$ at high α

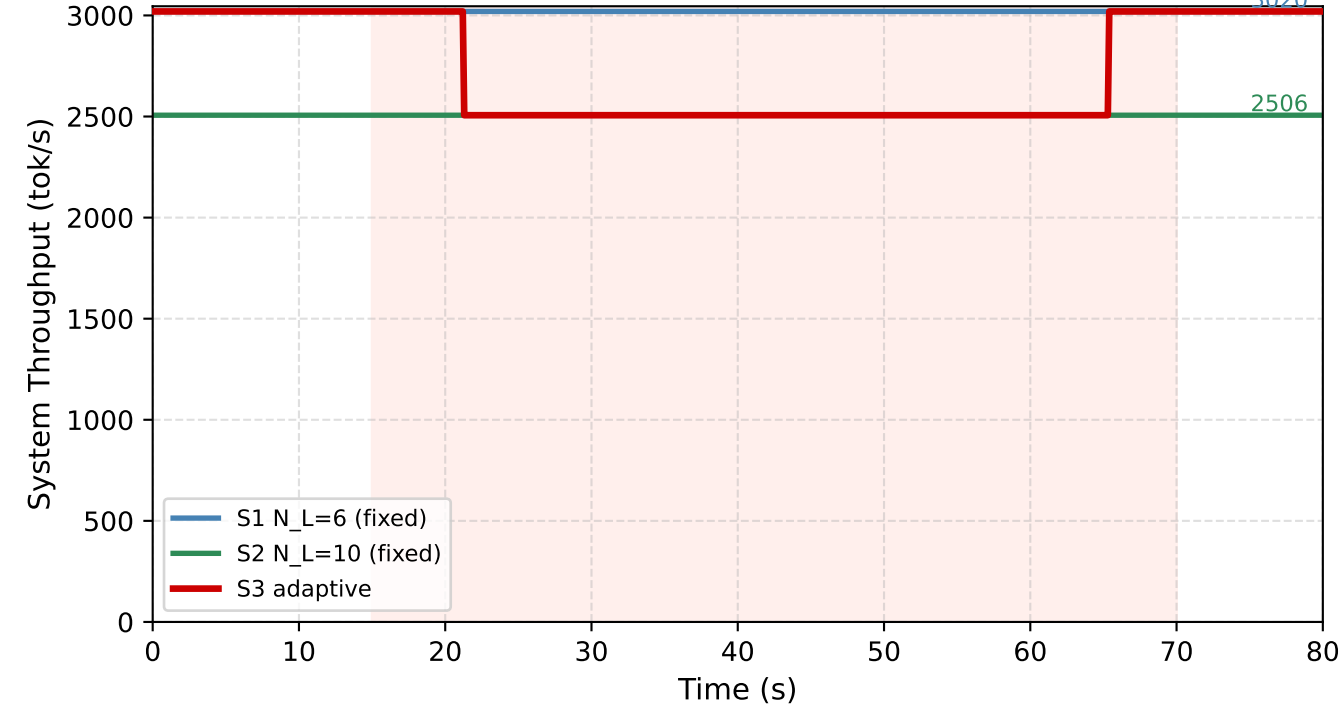

(c) Interactive Response Time R_L
 $S1$ always violates; $S2$ always meets; $S3$ adapts

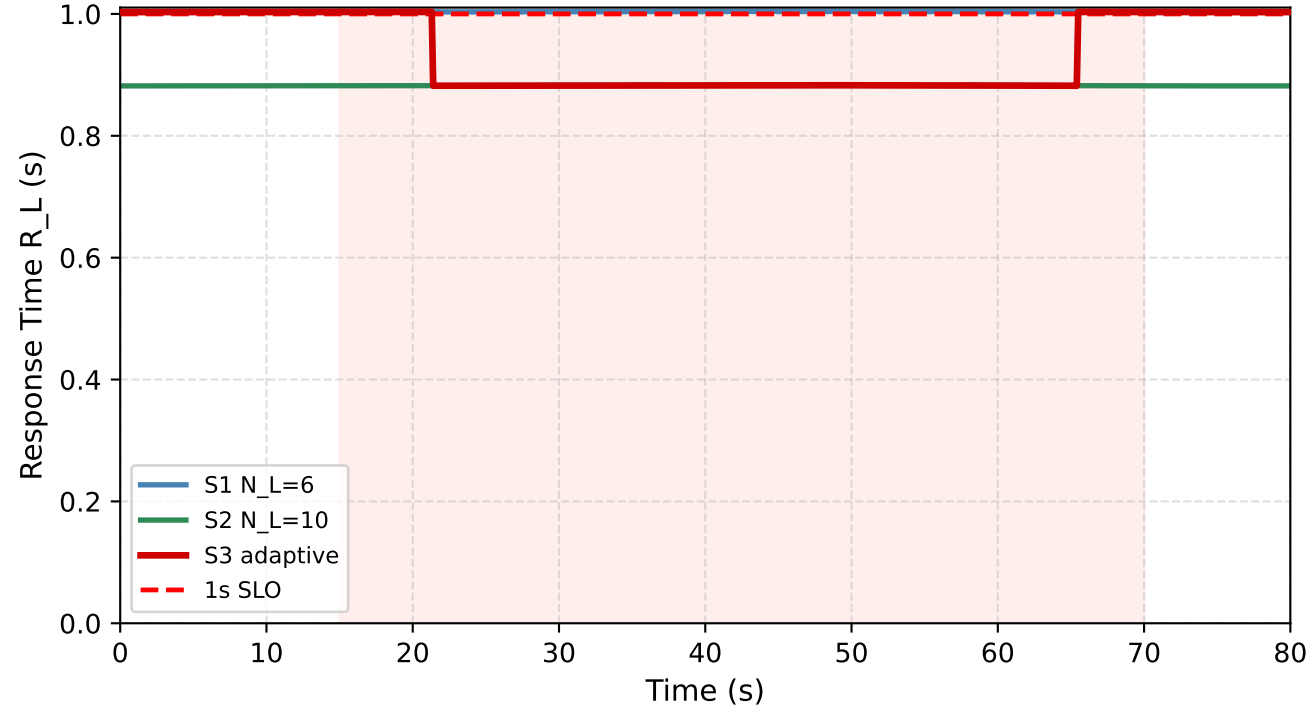

(d) S3 Dynamic N_L
 $N_L=6 \leftrightarrow 10$ at $\alpha=0.14$ crossover

