11) Q. Simulate Static routing configuration using cisco packet tracer.

Aim:

To Simulate a Static routing configuration using cisco packet tracer

procedure:-

*open cisco packet tracer and create the given network topology.

* Connect 3 routers and pc's using suitable Cable.

* Connect Ip address for router and pc's

* Enable an router interface using no Shut down.


* Configure Static routers on Router rotes, router 2 using Ip mobile.

* Set main and backup routes using difference administrative distance values.

* Test Connectivity

* use tracer verify the routing path

* Disconnect the main link and verify that the backup router work.

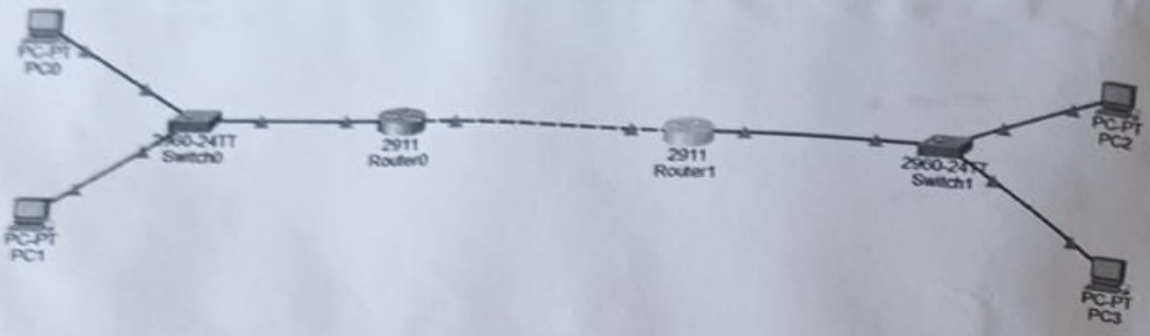

Result:-

Therefore, the Simulate Static routing Configuration using Cisco packet Tracer was executed successfully.

1) b) Simulate RIP using cisco packet tracer

Aim:


To Simulate RIP using 3 routers and 2 pc's cisco packet tracer.

procedure:


* create the topology with 3 routers and 2 pc's
* Connect the device using Straable cables.
* Assign the given IP address to both pc's
* Configure fast ethernet and Serial interface of all routers
* Enable interface using no shutdown.
* Set clock create of 4000 and bandwidth 6 on DE Serial Interface.
* Enable RIP on all our router using router rip.
* Add directly connected network using the network command
* Test Connectivity using ping 20.0.0.8
* Use trace IP 20.0.0.2 to verify the selected router
* Disconnected the direct cable - 0 - router

2 Link and router again to verify RI select the alternate route.


RIP_Dynamic_Routing_Protocol

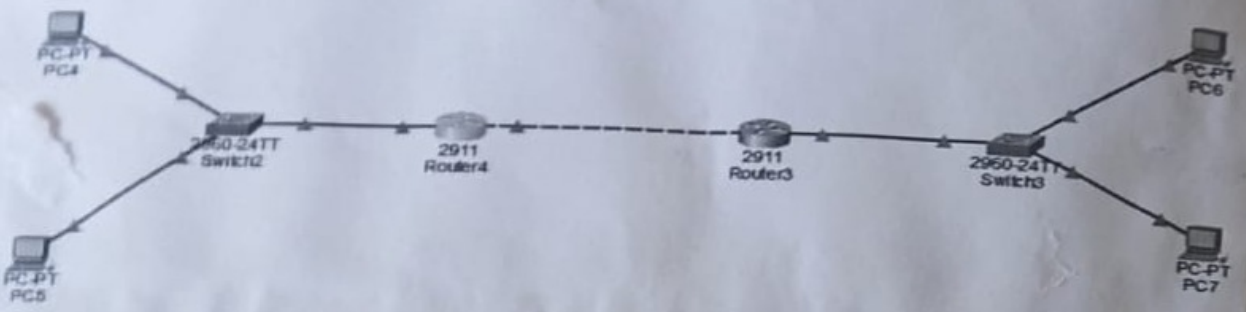

Static_Routing_Protocol

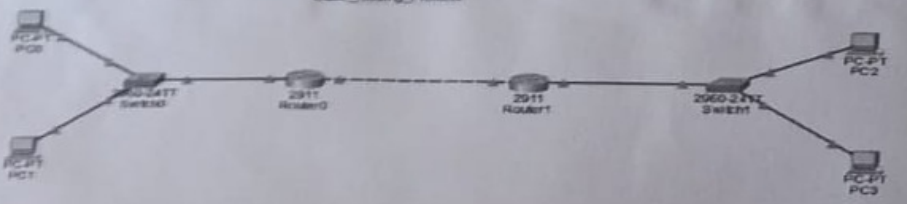

RIP_Dynamic_Routing_Protocol

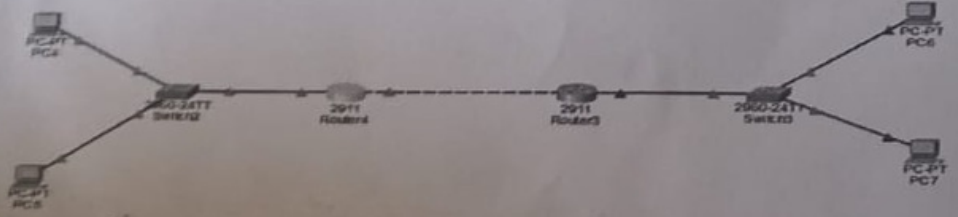

Result:

Thus, the Simulation of RIP using 3 router and 2 pc's. CISCO packet trace has been successfully done.