10 aug. Interconnecting routers in CISCO packet tra

Aim:

To design and configure a simple internetwork using a router in pn cisco packet tracer and test connectivity between two pc's

procedure:

Step 1:

Configure router 1.

* Select the routes and open CLI
* press enter to start configure Router
* Type enable to activate the privilage mode

Step 2:

* Assign Ip address to every pc in the network.

* Select the pc, go to desktop and select Ip configure and assign Ip address Default gateway.

* Assign the default gateway of PCs 192.168.10.1

* Assign the default gateway of R as 192.168.20.1

Step 3:

* Connect fast ethernet a port of PIO with fast ethernet 0/0 port of router 1 using a copper straight through cable.
* Connect fast ethernet 0 power with fast ethernet all port of row as using a copper straight through cable.

```
Router>en
Router#conf term
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#do show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol
GigabitEthernet0/0     unassigned      YES unset  administratively down down
GigabitEthernet0/1     unassigned      YES unset  administratively down down
GigabitEthernet0/2     unassigned      YES unset  administratively down down
Vlan1                  unassigned      YES unset  administratively down down

Router(config)#int gigabitEthernet0/0
Router(config-if)#ip address 10.0.0.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#int g0/1
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up


%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up

Router(config-if)#exit
Router(config)#end
```

```
Router#show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol
GigabitEthernet0/0     10.0.0.1        YES manual up                    up
GigabitEthernet0/1     192.168.1.1     YES manual up                    up
GigabitEthernet0/2     unassigned      YES unset  administratively down down
Vlan1                  unassigned      YES unset  administratively down down
Router#copy running-config sta-config
                           ^
% Invalid input detected at '^' marker.

Router#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
Router#
```

```
!
!
!
!
!
spanning-tree mode pvst
!
!
!
!
!
!
interface GigabitEthernet0/0
 ip address 10.0.0.1 255.255.255.0
 duplex auto
 speed auto
!
interface GigabitEthernet0/1
 ip address 192.168.1.1 255.255.255.0
 duplex auto
 speed auto
!
interface GigabitEthernet0/2
 no ip address
 duplex auto
 speed auto
 shutdown
!
interface Vlan1
 no ip address
 shutdown
!
ip classless
!
ip flow-export version 9
!
!
```

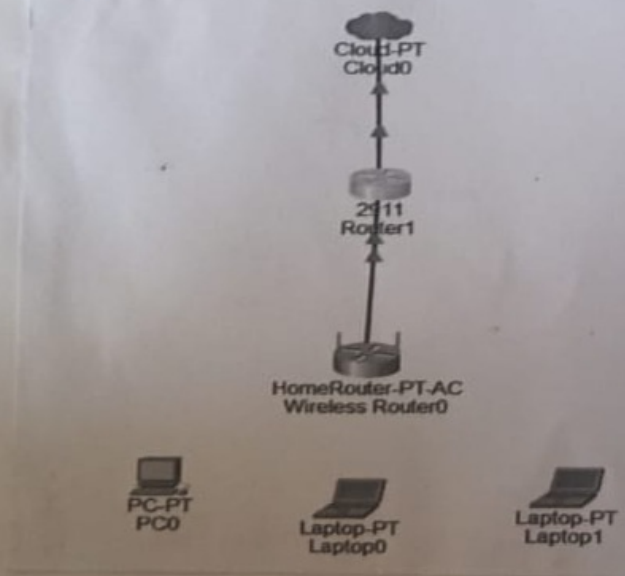

Result:

Therefore, the Internet working router in CISCO packet tracer.

10 b). Design and configure an Interconnecting using wireless router, DHCP Server and Internet cloud.


Aim:


To design and configure an Interconnecting using a wireless router. DHCP & Server and Internet cloud in CISCO packet tracer.

procedure:

* Open cisco packet tracer and create the
* required network topology.
* Connect PC, laptop, wireless router, cable, modem, Internet cloud and Server.
* Configure the laptop to the wireless router network and PC to DHCP
* Configure the Server with its IP 208.87.220.220 and enable DNS and DNS.
* verify connectivity using IP configure and ping CISCO.com.

Home WiFi Router

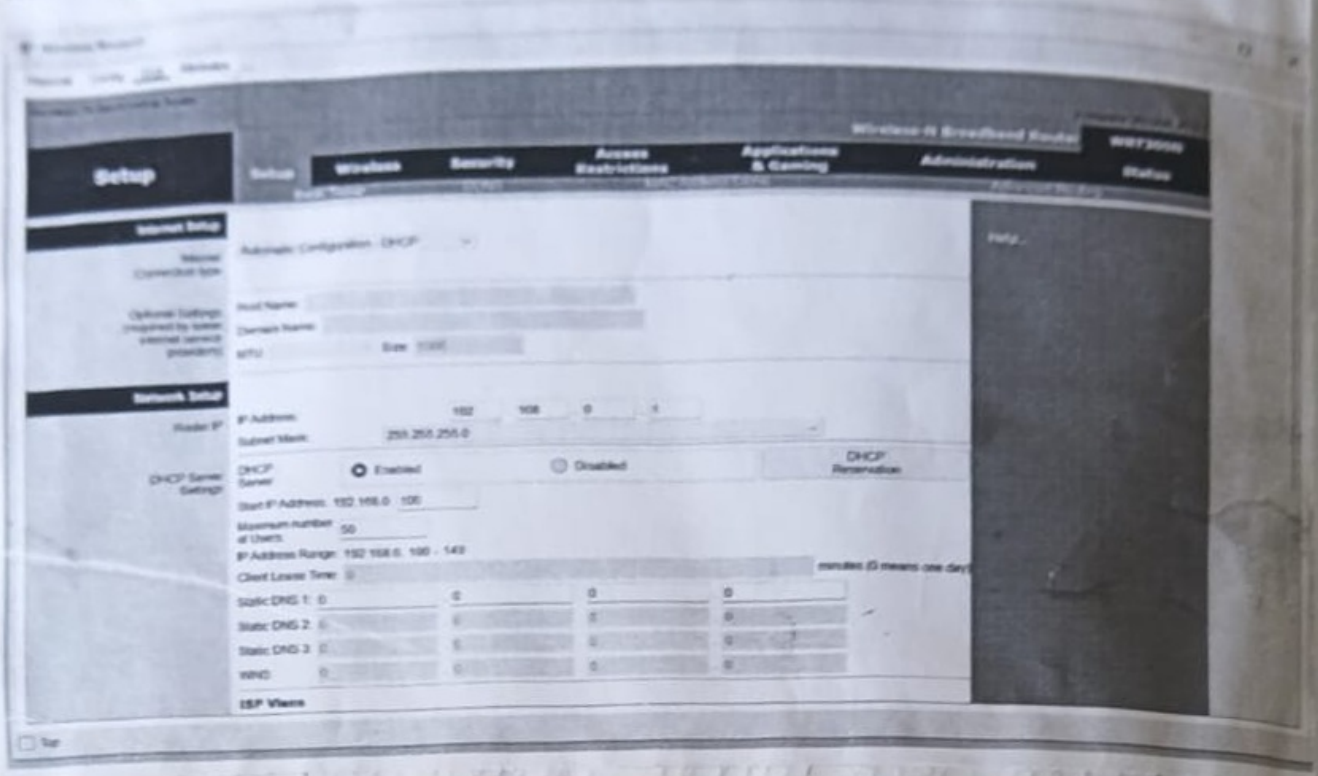

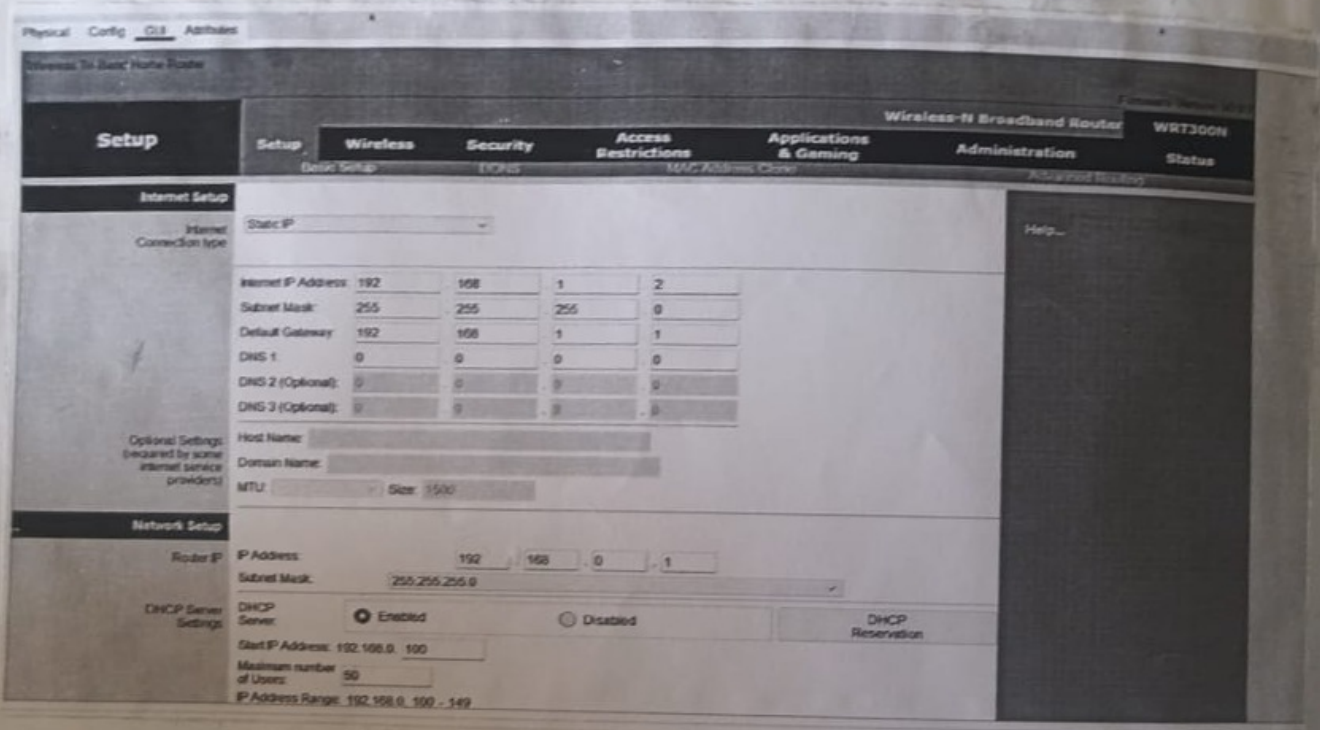

Result:

Therefore, The internetwork was successfully designed and configured using a wireless router, web Server and internet cloud.