9. Implementation of Subnetting using CISCO packet Tracer.

Aim:

Implementation of Subnetting in CISCO packet Tracer Simulator

procedure:

i) Classical Ip Subnetting is a technique that allows for more efficient use of Ip address by allowing for Subnet masks networks.

ii) CREATING A NETWORK TOPOLOGY:

The first step in implementing classless Ip Subnetting is to create a network topology in packet Tracer.

To create a network technique to add devices.

iii) Adding the Devices:

once we have created our network topology, we can add devices to it.

iv) SUBNETTING:

To Subnet the network Address of 192.168.1.0/24 provide enough space for at least 5 addresses and The Ip addressing for the network shown in the topology

i) Router R1

ii) GigabitEthernet 0/0 : 192.168.1.1

iii) GigabitEthernet 0/1 : 192.168.2.1

iv) Switch S1 :

v) FastEthernet 0/1 : 192.168.1.0/27.

vi) PC1 : 192.168.1.11

vii) PC2 : 192.168.1.12

viii) PC3 : 192.168.1.13

ix) PC4 : 192.168.1.14.

x) PC5 : 192.168.1.15

xi) FastEthernet 0/0/2 : 192.168.2.0/27

xii) PC5 : 192.168.4.15.

Configure the device.

enable

Configure terminal

interface FastEthernet 0/0

ip address {Ip address} {Subnet mask}

no shutdown

exit.


Interface FastEthernet 0/1


Ip address {Ip address} {Subnet masks}

no Shutdown

exit.

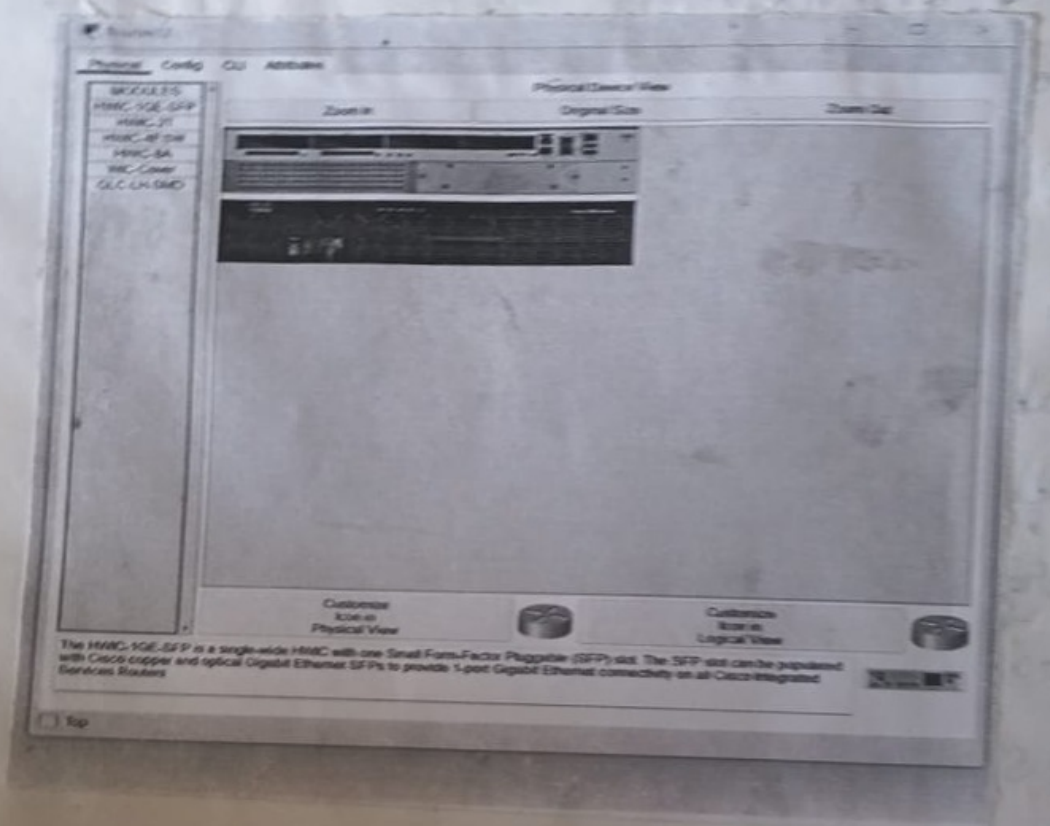


Physical
Config
CLI
Attributes
Physical Device View
Zoom In
Original Size
Zoom Out
Customize
Icons in
Physical View
Customize
Icons in
Logical View
Top

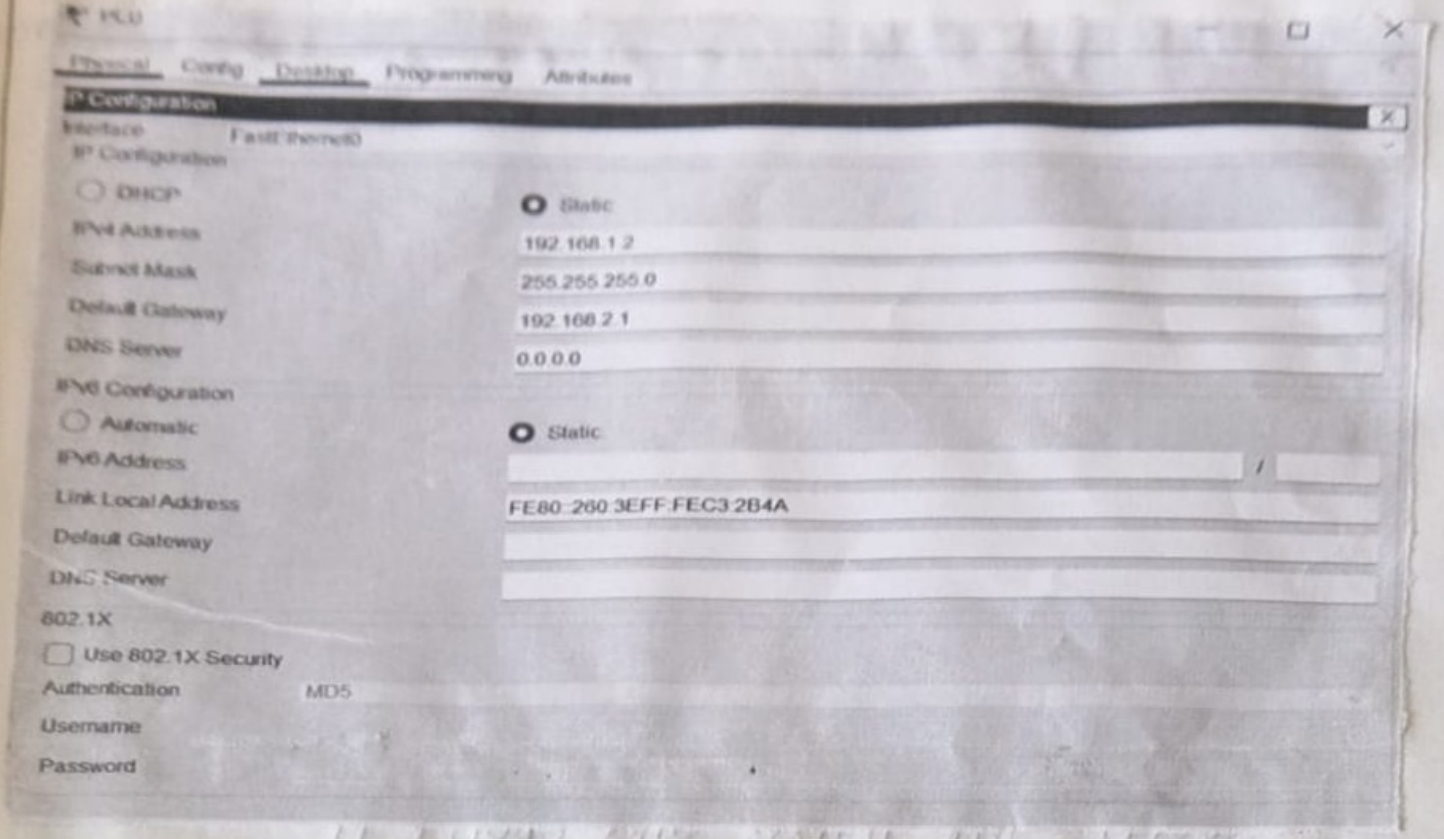

Result:

Therefore, the subnetting in CISCO packet Tracer Simulator was executed successfully.