

Fundamentals of Linear Control:

A Concise Approach

Maurício C. de Oliveira

Chapter 3: Transfer-Function Models

linearcontrol.info/fundamentals

3.1 The Laplace Transform

Definition

$$\mathcal{L}\{f(t)\} = F(s) = \int_0^{\infty} f(t) e^{-st} dt$$

Example

$$f(t) = 1 \Rightarrow F(s) = \int_0^{\infty} e^{-st} dt = \left. -\frac{e^{-st}}{s} \right|_0^{\infty} = 0 - \left(-\frac{1}{s}\right) = \frac{1}{s}, \quad \operatorname{Re}(s) > 0$$

Region of convergence

$$\operatorname{Re}(s) > \alpha_c = 0$$

Inverse Laplace Transform

$$\mathcal{L}^{-1}\{F(s)\} = \frac{1}{2\pi j} \lim_{\omega \rightarrow \infty} \int_{\alpha - j\omega}^{\alpha + j\omega} F(s) e^{st} ds, \quad \alpha > \alpha_c$$

See book for a lot more!

Table of Transform Pairs

	$f(t), \quad t \geq 0$	$F(s)$
impulse	$\delta(t)$	1
step	1, $1(t)$	$\frac{1}{s}$
ramp	t	$\frac{1}{s^2}$
monomial	t^m	$\frac{m!}{s^{m+1}}, \quad m \geq 1$
exponential	e^{-at}	$\frac{1}{s+a}$
	$t^m e^{-at}$	$\frac{m!}{(s+a)^{m+1}}, \quad m \geq 1$
sine	$\sin(at)$	$\frac{a}{s^2 + a^2}$
cosine	$\cos(at)$	$\frac{s}{s^2 + a^2}$
	$\cos(at + \phi)$	$\frac{s \cos \phi - a \sin \phi}{s^2 + a^2}$
	$2 k e^{-bt} \cos(at + \angle k)$	$\frac{k}{s+b-ja} + \frac{k^*}{s+b+ja}$

Table of Properties

	t -domain (time)	s -domain (frequency)
linearity	$\alpha f(t) + \beta g(t)$	$\alpha F(s) + \beta G(s)$
integration	$\int_{0^-}^t f(\tau) d\tau$	$\frac{F(s)}{s}$
differentiation	$\dot{f}(t) = \frac{d f(t)}{dt}$	$s F(s) - f(0^-)$
	$f^{(n)}(t) = \frac{d^n f(t)}{dt^n}$	$s^n F(s) - s^{n-1} f(0^-) - \dots - f^{(n-1)}(0^-)$
differentiation	$(-t)^n f(t)$	$\frac{d^n F(s)}{ds^n}$
convolution	$\int_{0^-}^t f(\tau) g(t - \tau) d\tau$	$F(s) G(s)$
time shift	$f(t - \tau) 1(t - \tau)$	$e^{-\tau s} F(s)$
frequency shift	$e^{-at} f(t)$	$F(s + a)$
initial-value	$\lim_{t \rightarrow 0^+} f(t)$	$\lim_{ s \rightarrow \infty} s F(s)$
final-value	$\lim_{t \rightarrow \infty} f(t)$	$\lim_{s \rightarrow 0} s F(s)$

3.2 Linearity, Causality, and Time-Invariance

Dynamic model

$$\begin{aligned} y(t) &= G(u(t), t) \end{aligned}$$

Linearity

$$\begin{aligned} y_1(t) &= G(u_1(t), t), & y_2(t) &= G(u_2(t), t), & y(t) &= G(\alpha_1 u_1(t) + \alpha_2 u_2(t), t) = \\ & \alpha_1 y_1(t) + \alpha_2 y_2(t) \end{aligned}$$

Time-invariance

$$\begin{aligned} y(t) &= G(u(t), t), & y(t, \tau) &= G(u(t - \tau), t) = y(t - \tau) \end{aligned}$$

Impulse response

Sifting property of the impulse

$$\begin{aligned} u(t) &= \int_{-\infty}^{\infty} u(\tau) \delta(t - \tau) d\tau = \int_0^{\infty} u(\tau) \delta(t - \tau) d\tau, \\ &\text{and } u(t) = 0, \quad t < 0 \end{aligned}$$

Linearity

$$\begin{aligned} y(t) &= \int_0^{\infty} u(\tau) g(t, \tau) d\tau = \int_0^{\infty} g(t, \tau) u(\tau) d\tau, \\ &\text{and } g(t, \tau) = G(\delta(t - \tau), t) \end{aligned}$$

Causality

$$\begin{aligned} g(t, \tau) &= 0, \quad t < \tau \quad \& \implies \quad y(t) = \int_0^{\infty} g(t, \tau) u(\tau) d\tau \\ &\end{aligned}$$

Impulse response

Causality + Time-invariance

$$\begin{aligned} g(t, \tau) &= g(t - \tau) = 0, \quad t < \tau \quad \& \implies \quad y(t) = \int_{0^-}^t g(t - \tau) u(\tau) d\tau \end{aligned}$$

Laplace transform

$$\begin{aligned} Y(s) &= G(s) U(s), \quad U(s) = \mathcal{L}\{u(t)\}, \quad G(s) = \mathcal{L}\{g(t)\}, \quad Y(s) = \mathcal{L}\{y(t)\} \end{aligned}$$

$G(s)$ is the **transfer-function**

3.3 Differential Equations and Transfer-Functions

Car model

$$\dot{y}(t) + \frac{b}{m} y(t) - \frac{p}{m} u(t) = \frac{p}{m} u(t)$$

Laplace transform

$$\mathcal{L}\left\{\dot{y}(t) + \frac{b}{m} y(t) - \frac{p}{m} u(t)\right\} = sY(s) - y(0^-) + \frac{b}{m} Y(s) - \frac{p}{m} U(s) = 0$$

Transfer-function

$$Y(s) = G(s) U(s) + F(s) y(0^-), \quad G(s) = \frac{\frac{p}{m}}{s + \frac{b}{m}}, \quad F(s) = \frac{1}{s + \frac{b}{m}}$$

Impulse response

$$g(t) = \mathcal{L}^{-1}\left\{\frac{\frac{p}{m}}{s + \frac{b}{m}}\right\} = \frac{p}{m} e^{-\left(\frac{b}{m}\right)t}, \quad t \geq 0$$

3.4 Integration and Residues

Theorem 3.1. Cauchy's residue theorem

If f is analytic inside and on the positively oriented simple closed contour C except at singular points p_k , $(k = 1, \dots, n)$, inside C then


$$\oint_C f(s) \, ds = 2\pi i \sum_{k=1}^n \operatorname{Res}_{s=p_k} f(s)$$

Notes

- $\operatorname{Res}_{s=p_k} f(s)$ is the **residue** of f at $(s = p_k)$
- $\operatorname{Res}_{s=p_k} f(s)$ is simpler to calculate than the original integral
- C is positively oriented simple contour
- Multiply by $'(-1)'$ if negatively oriented
- singularities are isolated, inside and not on the contour
- singularities outside C do not matter

Example

Contours

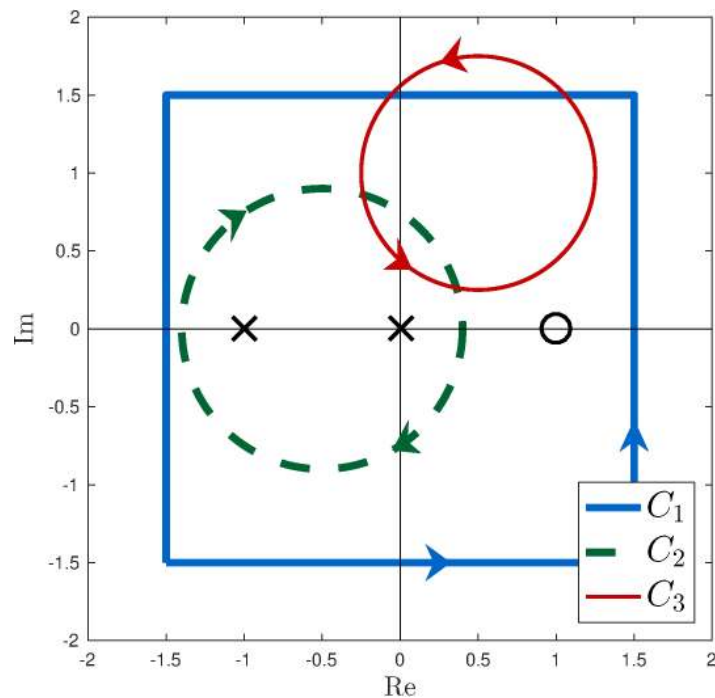

Function


$$f(s) = \frac{s-1}{s(s+1)}$$

Integrals


$$\begin{aligned} & \frac{1}{2\pi j} \int_{C_1} f(s) ds = \operatorname{Res}_{s=0} f(s) \\ & \operatorname{Res}_{s=-1} f(s) = - \int_{C_1} f(s) ds = - \int_{C_2} f(s) ds = 0 \end{aligned}$$

Application: Inverse Laplace transform

Γ_-^α :

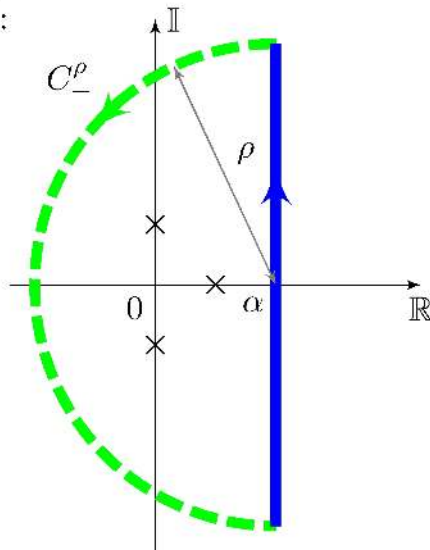

Γ_+^α :

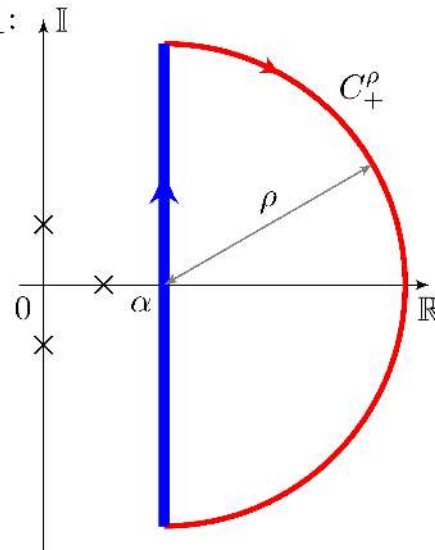

$$\begin{aligned} & \lim_{\rho \rightarrow \infty} \int_{C_-^\rho} F(s) e^{st} ds = 0 \implies \mathcal{L}^{-1}\{F(s)\} = \frac{1}{2\pi i} \lim_{\rho \rightarrow \infty} \int_{\Gamma_-^\alpha} F(s) e^{st} ds \\ & \quad = \sum_{k=1}^n \operatorname{Res}_{s=p_k} (F(s) e^{st}) \quad t < 0: \\ & \lim_{\rho \rightarrow \infty} \int_{C_+^\rho} F(s) e^{st} ds = 0 \implies \mathcal{L}^{-1}\{F(s)\} = \frac{1}{2\pi i} \lim_{\rho \rightarrow \infty} \int_{\Gamma_+^\alpha} F(s) e^{st} ds = 0 \end{aligned}$$

Residue

$$\operatorname{Res}_{s=s_0} f(s) = \int_{C \in D} f(s) \, ds, \text{ where } D = \{s : 0 < |s - s_0| < R\}$$

Laurent series expansion

$$f(s) = \frac{g(s)}{(s - s_0)^m}, \quad g(s_0) \neq 0, \quad g \text{ is analytic at } s_0$$

Calculus of residues

$$\operatorname{Res}_{s=s_0} f(s) = \begin{cases} g(s_0), & m = 1 \\ \frac{g^{(m-1)}(s_0)}{(m-1)!}, & m \geq 2 \end{cases}$$

3.5 Rational Functions

Canonical form

$$F(s) = \frac{N(s)}{D(s)}, \quad N, D \text{ are polynomials}$$

Notes

- Zeros: $N(s) = \beta (s - z_1) \cdots (s - z_m) = 0$
- Poles: $D(s) = (s - p_1) \cdots (s - p_n) = 0$, $D(s)$ is monic
- Order: n
- Proper: $m \leq n$
- Strictly Proper: $m < n$

Inverse Laplace transform

$$\text{If } F(s) \text{ is strictly proper, then } \mathcal{L}^{-1}\{F(s)\} = \sum_{k=1}^n \operatorname{Res}_{s=p_k} \left(F(s) e^{st} \right), \quad t \geq 0$$

Simple poles

$$\begin{aligned} F(s) \backslash, e^{s t} &= \frac{G(s)}{(s - p_k)}, \quad G(s) = (s - p_k) \backslash, F(s) \backslash, e^{s t}, \quad G(p_k) \neq 0 \\ \end{aligned}$$

Residues

$$\begin{aligned} \operatorname{Res}_{s=p_k} \left(F(s) \backslash, e^{s t} \right) &= G(p_k) = k_k \backslash, e^{p_k t}, \quad k_k = \\ \lim_{s \rightarrow p_k} (s - p_k) F(s) \end{aligned}$$

Inverse Laplace transform

$$\begin{aligned} \mathcal{L}^{-1}\{F(s)\} &= \sum_{k=1}^n k_k e^{p_k t}, \quad t \geq 0 \end{aligned}$$

Expansion in partial fractions

$$\begin{aligned} F(s) &= \mathcal{L} \left\{ \sum_{k=1}^n k_k e^{p_k t} \right\} = \sum_{k=1}^n k_k \\ \mathcal{L} \left\{ e^{p_k t} \right\} &= \sum_{k=1}^n \frac{k_k}{s - p_k} \end{aligned}$$

Example: car model step response

Step input

$$\begin{aligned} u(t) &= \tilde{u} \cdot 1(t), & U(s) &= \frac{\tilde{u}}{s} \end{aligned}$$

Laplace transform of the output

$$\begin{aligned} Y(s) &= \frac{\tilde{u}}{s} \times \frac{\frac{p}{m}}{s + \frac{b}{m}} + \frac{1}{s + \frac{b}{m}} \cdot y_0 \\ \end{aligned}$$

Inverse Laplace transform

$$\begin{aligned} k_1 &= \lim_{s \rightarrow 0} s \cdot Y(s) = \frac{p}{b} \tilde{u}, & k_2 &= \lim_{s \rightarrow -\frac{b}{m}} \left(s + \frac{b}{m} \right) Y(s) = y_0 - \frac{p}{b} \tilde{u} \\ y(t) &= \sum_{k=1}^2 \operatorname{Res}_{s=p_k} \left(Y(s) e^{st} \right) = k_1 e^{p_1 t} + k_2 e^{p_2 t} = \frac{p}{b} \tilde{u} + \left(y_0 - \frac{p}{b} \tilde{u} \right) e^{-\frac{b}{m} t}, \quad t > 0 \end{aligned}$$

Proper functions

Split (F) as $(F_1 + F_2)$ where (F_1) is a constant and (F_2) is strictly proper, e.g.
$$F(s) = \frac{s}{s+1} = F_1(s) + F_2(s), \quad F_1(s) = 1, \quad F_2(s) = -\frac{1}{s+1}$$

Repeated pole

$$F(s) = \frac{G(s)}{(s - s_k)^m}, \quad G(s) = (s - s_k)^m F(s), \quad G(s_k) \neq 0, \quad m \geq 2$$

Residue

$$\operatorname{Res}_{s=p_k} (F(s) e^{st}) = \frac{G^{(m-1)}(p_k)}{(m-1)!} = \lim_{s \rightarrow p_k} \frac{d^{j-1}}{ds^{j-1}} (s - p_k)^m F(s)$$

Example: closed-loop car model ramp response

Ramp input

$$\begin{aligned} \bar{y}(t) &= \mu \, t, \, 1(t), & \bar{Y}(s) &= \frac{\mu}{s^2} \end{aligned}$$

Laplace transform of the output

$$\begin{aligned} Y(s) &= H(s) \bar{Y}(s) = \frac{b_1}{s + a_1} \times \frac{\mu}{s^2}, & a_1 &= \frac{b}{m} + \\ & \frac{p}{m} K, & b_1 &= \frac{p}{m} K \end{aligned}$$

Inverse Laplace transform

$$\begin{aligned} k_1 &= \lim_{s \rightarrow -a_1} (s + a_1) Y(s) = \frac{\mu}{a_1^2}, & k_{2,1} &= \lim_{s \rightarrow 0} s^2 Y(s) = \frac{\mu}{a_1}, & k_{2,2} &= \lim_{s \rightarrow 0} \frac{d}{ds} s^2 Y(s) = - \\ & \frac{\mu}{a_1^2} \end{aligned} \quad \begin{aligned} y(t) &= \sum_{k=1}^2 \operatorname{Res}_{s=p_k} \left(Y(s) e^{st} \right) = \frac{\mu}{a_1^2} \left[e^{-a_1 t} + a_1 t - 1 \right], \quad t \geq 0 \end{aligned}$$

3.6 Stability

Bounded-Input-Bounded-Output (BIBO) stability

$$\begin{aligned} |u(t)| \leq M_u < \infty \implies |y(t)| \leq M_y < \infty \end{aligned}$$

Necessary and sufficient condition

$$\|g\|_1 := \int_0^\infty |g(\tau)| \, d\tau < M_g < \infty$$

Proof of sufficiency

$$\begin{aligned} |y(t)| &= \int_0^t |g(\tau)| |u(t-\tau)| \, d\tau \leq M_u \int_0^t |g(\tau)| \, d\tau \leq M_y, \\ M_y &= M_u M_g < \infty \end{aligned}$$

Bounded-Input-Bounded-Output (BIBO) stability

$$\left[\begin{array}{l} |u(t)| \leq M_u < \infty \end{array} \right] \implies \left[\begin{array}{l} |y(t)| \leq M_y < \infty \end{array} \right]$$

Necessary and sufficient condition

$$\|g\|_1 := \int_0^\infty |g(\tau)| \, d\tau < M_g < \infty$$

Proof of necessity

$$\left[\begin{array}{l} u_T(t) = \begin{cases} \operatorname{sign}(g(T-t)), & 0 \leq t \leq T \\ 0, & t < 0 \text{ or } t > T \end{cases} \end{array} \right] \text{ is such that } (|u_T(t)| \leq 1) \text{ and } \left[\begin{array}{l} y_T(T) = \int_0^T g(T-\tau) \, d\tau \\ u_T(\tau) \, d\tau = \int_0^T |g(\tau)| \, d\tau \end{array} \right] \rightarrow \|g\|_1 \text{ for } T \text{ large} \end{array}$$

Frequency-domain

Asymptotic stability

$G(s)$ has no poles on the imaginary axis or on the right-hand side of the complex plane

Same as BIBO stability

One side is easy: because $|e^{-s t}| \leq 1$ for all $\operatorname{Re}(s) \geq 0$ $\begin{aligned} |G(s)| &= | \mathcal{L}\{g(t)\} | = \left| \int_0^\infty g(t) e^{-s t} dt \right| \leq \int_0^\infty |g(t)| |e^{-s t}| dt \\ &\leq \int_0^\infty |g(t)| dt = \|g\|_1 \end{aligned}$ hence G has no poles such that $\operatorname{Re}(s) \geq 0$ because G is bounded in $\operatorname{Re}(s) \geq 0$

Frequency-domain

Asymptotic stability

$G(s)$ has no poles on the imaginary axis or on the right-hand side of the complex plane

Same as BIBO stability

The other side is more complicated, unless $G(s)$ is rational. In this case, if $G(s)$ is strictly proper and with simple poles
$$|g(t)| \leq \sum_{k=1}^n |k_k| e^{p_k t} = \sum_{k=1}^n |k_k| e^{\operatorname{Re}(p_k) t}, \quad t > 0$$
 and because $\operatorname{Re}(p_k) < 0$
$$|g|_1 \leq \int_0^\infty |g(t)| dt \leq \sum_{k=1}^n |k_k| \int_0^\infty e^{\operatorname{Re}(p_k) t} dt = \sum_{k=1}^n \frac{|k_k|}{-\operatorname{Re}(p_k)} < \infty$$
 Conclusion is the same if $G(s)$ is proper and/or has repeated poles

3.7 Transient and Steady-State Response

Frequency-domain splitting

$$Y(s) = Y_{-}(s) + Y_0(s) + Y_{+}(s)$$

- $Y_{-}(s)$ has all poles on $\operatorname{Re}(s) < 0$
- $Y_0(s)$ has all poles on $\operatorname{Re}(s) = 0$
- $Y_{+}(s)$ has all poles on $\operatorname{Re}(s) > 0$

Time-domain splitting

$$y(s) = y_{-}(s) + y_0(s) + y_{+}(s)$$

- $y_{\mathrm{tr}}(t) = y_{-}(t) = \mathcal{L}^{-1}\{Y_{-}(s)\}$ is the transient response
- $y_{\mathrm{ss}}(t) = y_0(t) = \mathcal{L}^{-1}\{Y_0(s)\}$ is the steady-state response, bounded or with at most polynomial growth
- $y_{+}(t) = \mathcal{L}^{-1}\{Y_{+}(s)\}$ is unbounded with exponential growth

3.8 Frequency Response

Time-invariant linear system

Transfer-function

$$\begin{aligned} G(s) \end{aligned}$$

Input signal

$$u(t) = A \cos(\omega t + \phi)$$

Steady-state output response

$$y_{\mathrm{ss}}(t) = A |G(j\omega)| \cos(\omega t + \phi + \angle G(j\omega))$$

Not usually true for time-varying linear systems!

System behavior can be “plotted”: Bode plots


Bode plots

Examples (from Section 7.8)

$$L_0 = \frac{67}{s(s^2 + 49)}, \quad L_\pi = \frac{67}{s(s^2 - 49)}$$


Magnitude

$(20 \log_{10} |G(j\omega)|)$ versus $(\log_{10} \omega)$

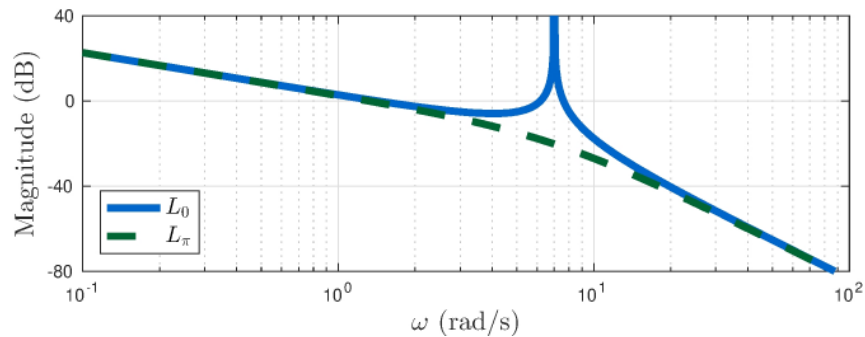

Phase:

$(\angle G(j\omega))$ versus $(\log_{10} \omega)$

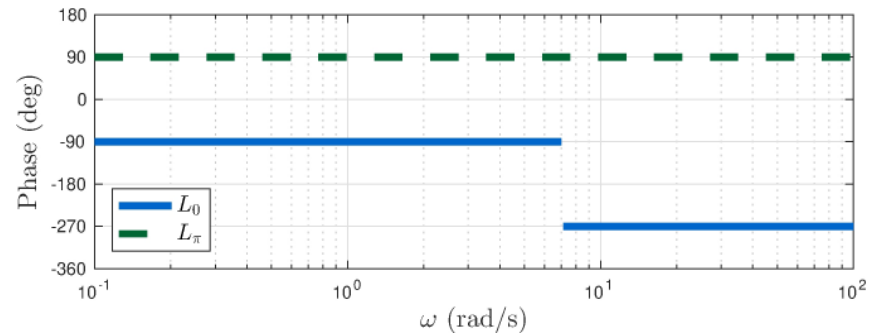

See Chapter 7 for much more!

3.9 Norms of Signals and Systems

Some norms of signals

$$\begin{aligned} \|y\|_1 &= \int_{0^-}^{\infty} |y(t)| \, dt, & \|y\|_2 &= \left(\int_{0^-}^{\infty} y(t)^2 \, dt \right)^{1/2} \\ \|y\|_{\infty} &= \sup_{t \geq 0} |y(t)| \end{aligned}$$

BIBO stability

$$\|y\|_{\infty} \leq \|g\|_1, \quad \|u\|_{\infty}$$

Signal norms are equivalent

$$\|y\|_p \leq \|g\|_1, \quad \|u\|_p, \quad p = 1, 2, \dots, \infty$$

Some norms of systems

Plancherel and Parseval's theorem

$$\begin{aligned} \|y\|_2^2 &= \int_{-\infty}^{\infty} y(t)^2 dt = \int_{-\infty}^{\infty} y^*(t) y(t) dt = \frac{1}{2\pi} \int_{-\infty}^{\infty} Y(j\omega) Y(-j\omega) d\omega \\ &= \frac{1}{2\pi} \int_{-\infty}^{\infty} |Y(j\omega)|^2 d\omega \end{aligned}$$

(H_2) norm

$$\begin{aligned} \|y\|_{-\infty} &\leq \|G\|_2 \|u\|_2, \text{ and } \|g\|_2 = \|G\|_2 \end{aligned}$$

Computation can be done using residues!

$(H_{-\infty})$ norm

$$\begin{aligned} \|y\|_2 &\leq \|G\|_{-\infty} \|u\|_2, \text{ and } \|G\|_{-\infty} = \sup_{\omega \in \mathbb{R}} |G(j\omega)| \end{aligned}$$

Value can be obtained from a Bode plot!

Learn more

- [Book website](#)

