

Quantum limited parametric amplifier for millimeter and submillimeter astrophysics

1 Statement of problem

High resolution spectroscopic observations in (sub)millimeter wavelengths are made using telescopes with heterodyne receiver systems. In these receivers, power radiated from the sky is optically focused into a feed horn, then mixed to a lower intermediate frequency (IF) using an SIS mixer, then the IF signal is amplified with a low noise transistor amplifier (LNA), and then further processed and detected. Signal power is lost when traveling through the mixer, and the LNA adds noise. This imposes a *sensitivity* limitation on the receiver. Additionally, the *instantaneous bandwidth* of the receiver is limited by both the mixer and LNA bandwidths. We propose to develop an amplifier to be inserted immediately before the mixer in a heterodyne receiver setup. This amplifier would enable use of a wider IF bandwidth mixer; provide enough gain over the full mixer bandwidth to relax the noise performance required of the LNA, with improvement to the receiver's sensitivity; and permit the use of an LNA that covers the full mixer IF bandwidth.

Development of this new amplifier, to be called the W-band Travel-wave Kinetic Inductance Parametric Amplifier (wTKIP)¹, would constitute a major breakthrough in (sub)millimeter wave receiver systems. Ultimately, we want to demonstrate the wTKIP on the Atacama Large Millimeter/Submillimeter Array (ALMA) Band 3 receiver because this would be of great scientific benefit. Previous collaboration between the proposed host department and the ALMA team has identified ALMA's interest to obtain the technology. This proposal aims to develop the TKIP technology to state where it is ready to be used at ALMA.

¹Throughout this proposal, "TKIP" refers to those devices for use at unspecified frequency bands, whereas wTKIP refers to the proposed device which is optimized for use at the W-band (80 - 116 GHz) and μ TKIP refers to the microwave device described in [3] .

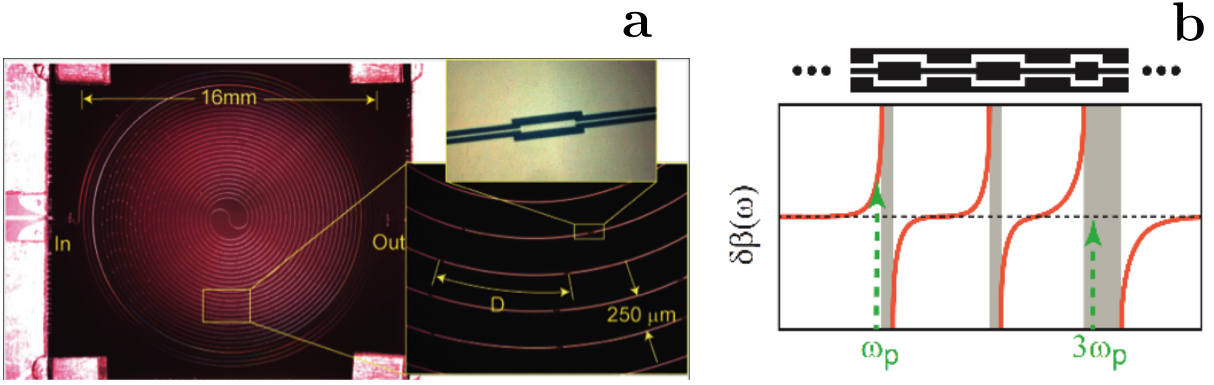


Figure 1: **a**, A picture of the microwave band TKIP, (μ TKIP), which consists of a 0.8 m length of NbTiN CPW line arranged in a double spiral to reduce resonances due to coupling between adjacent lines. The line is periodically loaded by widening a short section after every length $D=877$ micron as shown on the right, producing the stop band and dispersion characteristics. The phase velocity on the line is $0.1c$ due to its large kinetic inductance. **b**, An illustration of the effect of the periodic loading pattern (shown schematically) on the transmission of an infinite transmission line. The gray regions represent stop bands; waves in these frequency ranges decay evanescently. As the fractional width of the third stop band is much larger than the first, the pump can be placed at a propagating frequency while $3\omega_P$ is blocked.

2 Scientific merit

Progress toward understanding the following processes are ALMA science goals and coincide with the scientific priorities declared in the National Academies 2010 decadal survey².

Molecular gas and dust emission and absorption in submillimeter galaxies, (SMGs)

SMGs trace a large fraction of the star formation activity in the universe and are dominated by objects undergoing rapid star formation at relatively high redshifts ($1 < z < 3$). ALMA can locate SMGs and obtain redshift information by measuring the positions of CO lines. The improved receiver instantaneous bandwidth and noise afforded by the μ TKIP would increase speed of imaging and spectroscopy of high redshift SMGs by more than a factor of ten.

Galaxy clusters The Sunyaev-Zel'dovich (SZ) effect is a distortion of the cosmic microwave background (CMB) spectrum caused by the scattering of CMB photons as they pass through the intracluster medium of galaxy clusters. Wide-field high angular resolution imaging with moderate spectral resolution in bands from 15 GHz to 300 GHz would allow unprecedented determination of the cluster gas temperature and density profiles and therefore the cluster mass and dynamics. These measurements could only be made with a significant

²See decadal survey chapter 2 on “the compelling questions for the next decade and beyond” with regard to “origins”.

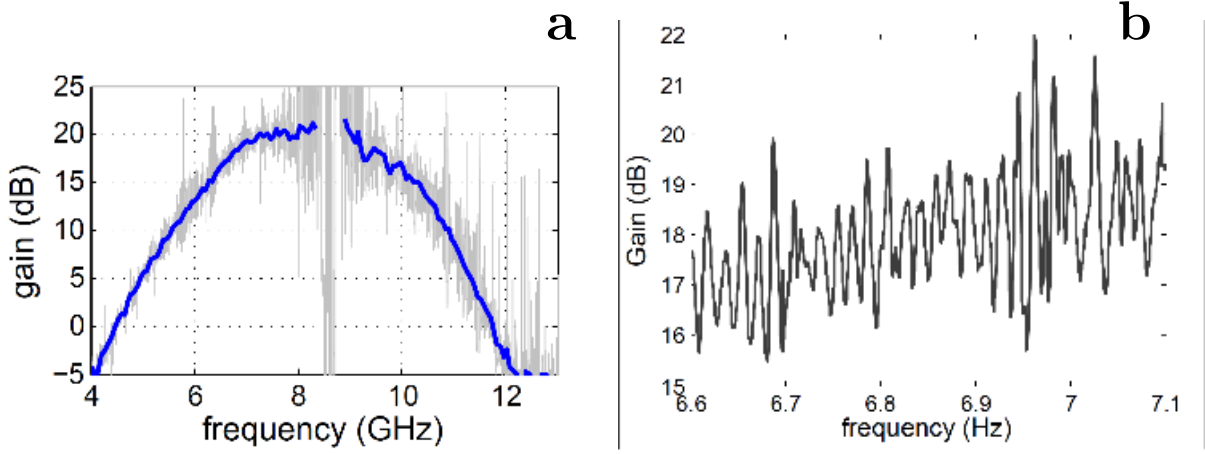


Figure 2: **a**, Measured gain of a μ TKIP using a 0.8 m NbTiN CPW (gray line). The measured gain is smoothed over 40 MHz to produce the blue line. **b**, Detail of gain curve between 6.6 and 7.1 GHz. The rapid gain variations are due to reflections at the ends of the device. We expect to reduce these reflections through better impedance matching and by implementing ground ties to connect the CPW grounds.

increase in sensitivity, frequency coverage and mapping speed over the existing single dish and interferometric instruments.

Star formation in the Milky Way Understanding how molecular clouds of low density transition to clouds with density high enough to support star formation and why such a small fraction of the cloud mass is contained in dense gas is key to determining the dominant physical processes that control the star formation rate. Spectral lines from different molecular transitions probe different volume densities and temperatures, and time-dependent chemistry favors the production of different molecules at distinct times. The increased instantaneous bandwidth of a wTKIP receiver would accelerate detection of these lines.

3 Technology description

The TKIP, Fig. 1a, consists of an electrically long section of superconducting transmission line, in coplanar waveguide (CPW) format. An intense “pump” waveform at frequency ω_P , and a weak “signal” waveform are guided into one end of the transmission line. The signal waveform emerges amplified at the other end of the line.

The TKIP exploits the natural nonlinear behaviour of the surface inductance of the superconductor. The surface inductance (“kinetic inductance”) depends on the current I , such that the series inductance per unit length is $\bar{L}(I) = \bar{L}(0)[1 + I/I_*^2]$. The phase velocity depends on inductance, $v_p(I) = 1/\sqrt{\bar{L}(I)\bar{C}} \approx v_p(0)(1 - \alpha I^2/2I_*^2)$ and results in the nonlinear

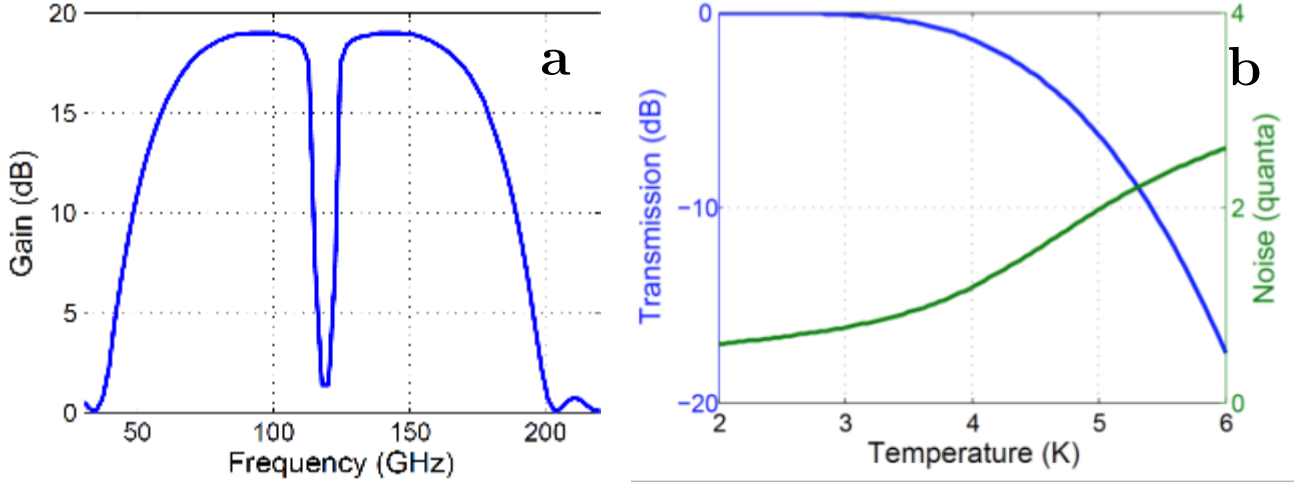


Figure 3: **a**, Calculated gain of the W-band TKIP (wTKIP), assuming a pump power half as large as what was used with the microwave TKIP described in [3] (μ TKIP). The dip in the center is due to dispersion around the pump frequency. **b**, Calculated transmission through a 100λ section of the NbTiN line versus temperature in blue. The green line shows the estimated noise contribution of the device, assuming no non-thermal noise sources.

process of four-wave mixing. Fiber optic paramaps, used in telecommunications, are based on this mixing [2] and coupled mode equations have been developed to quantify their parametric gain. We use this theory [6] to predict the gain of the TKIP. For a dispersive transmission line, the maximum signal gain is $G_S \approx e^{2\gamma P_P \ell}/4$, where ℓ is the length of the transmission line, P_P is the pump power, and γ is a measure of the nonlinearity.

Dispersionless nonlinear media, such as our superconducting transmission line, support efficient harmonic generation. The formation of pump harmonics would severely limit the gain of the TKIP, [4]. We therefore introduce dispersion into the TKIP by periodically loading the line, Fig. 1b. The loads additionally introduce dispersion around the pump frequency itself, ω_P . This allows us to access exponential gain.

4 Previous work

Group of my proposed mentor previously constructed a microwave frequency TKIP (μ TKIP) [3]. In comparison to the μ TKIP, the wTKIP must have increased gain, without the fine-scale ripple observed in the μ TKIP (Fig. 2), and lower noise for it to be useful at ALMA. Presently, the group has fabricated a first iteration wTKIP, but funds were exhausted before testing could commence. The wTKIP uses a pump at 118 GHz and its expected gain is shown in Fig. 3a.


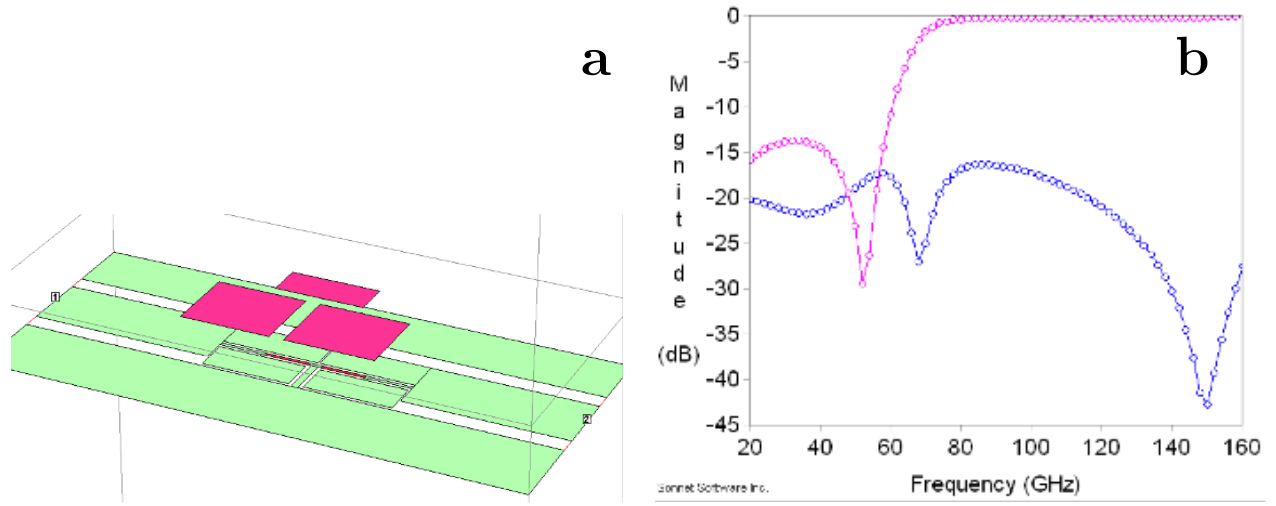


Figure 4: **a**, Geometry of a reflectionless 60 GHz high pass filter. Layers: Green = NbTiN, red = resistor, magenta = metal conductor. An SiO₂ layer isolates the NbTiN and conductor layers. The design is low risk in that no contact is required between NbTiN and the top conductor and that the smallest critical dimension required is 2 microns. The thickness of the NbTiN is the same as that of the paramp. **b**, Simulated reflection S11 (blue) and transmission S21 (red) of the filter.

5 Approach

Research tasks and their scheduling are indicated in the Gantt chart.

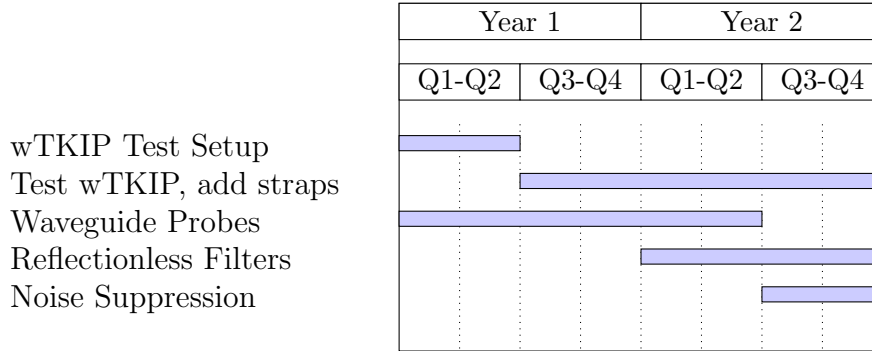

I propose to construct a test setup capable of measuring the gain and noise of the wTKIP. To suppress the gain ripple, we will better control the impedance of the paramp transmission line by introducing straps that connect the CPW ground planes, and by better coupling signals into and out of the transmission line. This can be done using full band waveguide probes to perform the transition from waveguide to the paramap transmission line (e.g.[7]), or slot antennae which are combined into a phased array, as used in [1]. Additionally, we propose to develop reflectionless filters [5], Fig. 4, to dissipate the out of band power that may be traveling into or within the paramp transmission line. Lastly, since [3], the group determined that excess noise in the TKIP is caused by device heating that occurs due to the

intense pump waveform, Fig. 3b. I intend to minimize heating by better heat sinking the device, and using a lower P_P . The results of this development work will be published.

References

- [1] Sunil R. Golwala et al. “Status of MUSIC, the MUltiwavelength Sub/millimeter Inductance Camera”. In: *Millimeter*. Ed. by Wayne S. Holland. Vol. 8452. Sept. 2012, p. 845205. arXiv: 1211.0595.
- [2] J. Hansryd et al. “Fiber-based optical parametric amplifiers and their applications”. In: *IEEE Journal on Selected Topics in Quantum Electronics* 8.3 (2002), pp. 506–520.
- [3] Byeong Ho Eom et al. “A wideband, low-noise superconducting amplifier with high dynamic range”. In: *Nature Physics* 8.8 (July 2012), pp. 623–627.
- [4] R Landauer. “Shock Waves in Nonlinear Transmission Lines and Their Effect on Parametric Amplification”. In: *IBM Journal of Research and Development* 4.4 (1960), pp. 391–401.
- [5] Matthew A. Morgan and Tod A. Boyd. “Theoretical and Experimental Study of a New Class of Reflectionless Filter”. In: *IEEE Transactions on Microwave Theory and Techniques* 59.5 (2011), pp. 1214–1221.
- [6] R. Stolen and J. Bjorkholm. “Parametric amplification and frequency conversion in optical fibers”. In: *IEEE Journal of Quantum Electronics* 18.7 (1982), pp. 1062–1072.
- [7] G. Yassin and S. Withington. “Analytical expression for the input impedance of a microstrip probe in waveguide”. In: *International Journal of Infrared and Millimeter Waves* 17.10 (Oct. 1996), pp. 1685–1705.