

PROGRAMMING INTERNET OF THINGS

IoT-Based Room Climate & Rain Monitoring System


ESP8266 + DHT11 + Rain Sensor + MQTT +
OLED + Buzzer + LEDs

Amit Kumar Rawat

Mohammad Abu Sayed

Ahmet Can Seker

GitHub: <https://github.com/mdabusaayed/RoomClimateRainMonitor/>

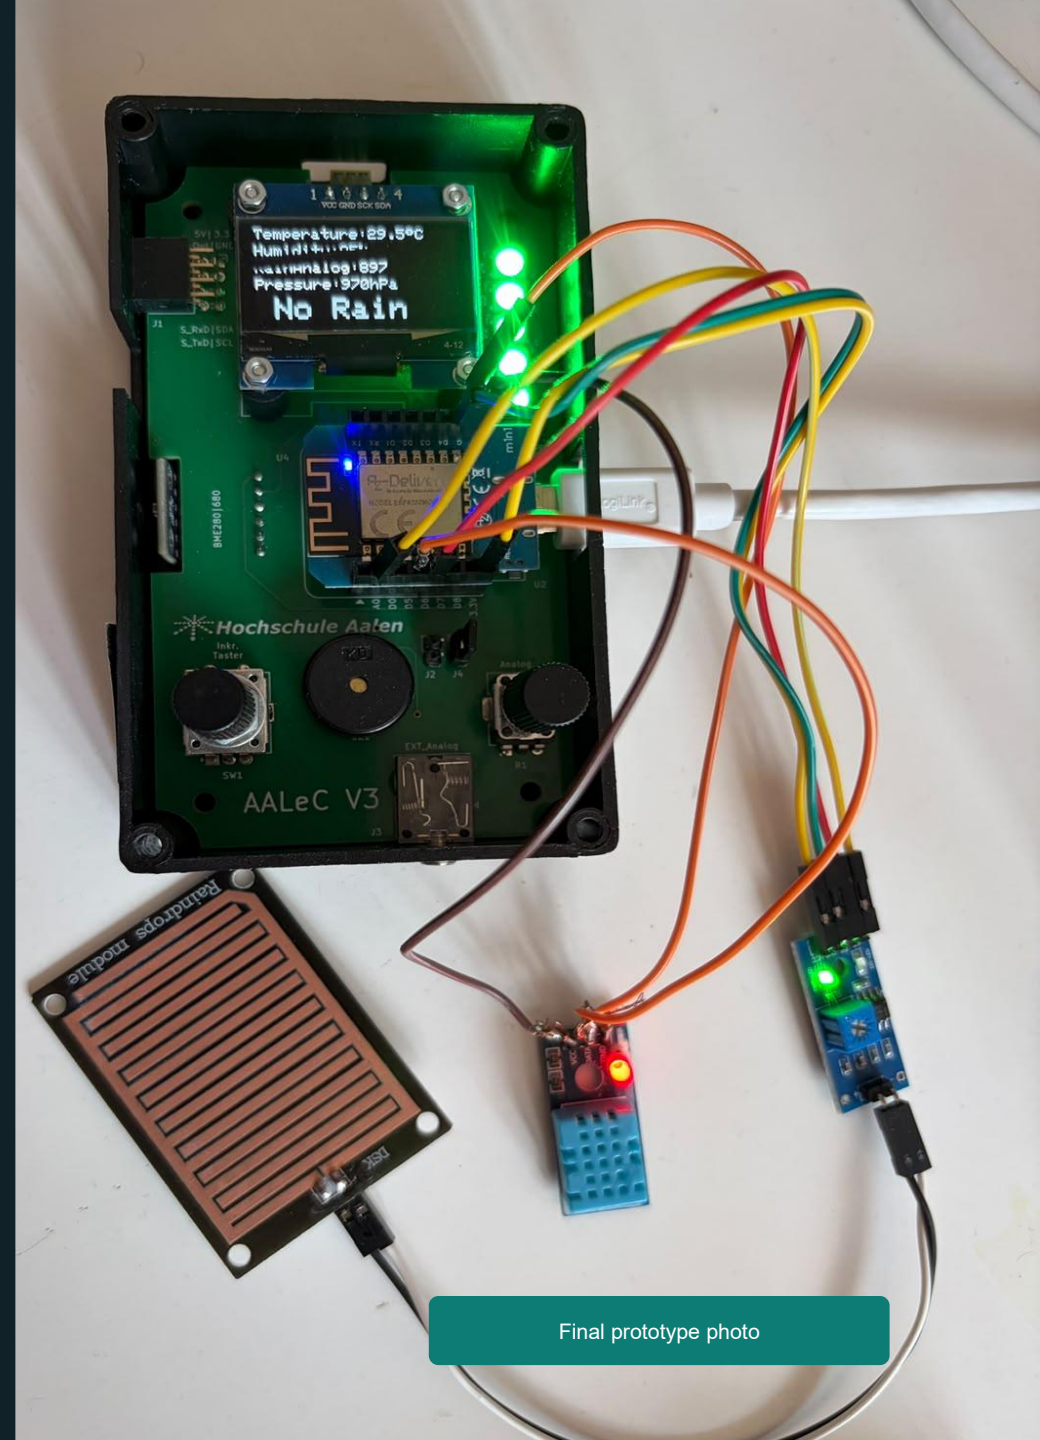

Final prototype photo

Use case and project idea

Why this project?

💧 Humidity problem

Indoor humidity can become a problem in dorms, basements, and poorly ventilated rooms.

⚠️ Risk if unnoticed

Moisture may lead to mold risk, uncomfortable room conditions, or hidden water leakage.

✅ Our solution

The project monitors room climate (temperature, humidity, pressure) and detects rain presence in real time.using sensors, OLED feedback, LEDs, buzzer, and MQTT.




Initial prototype with fake humidity

Components




Main AALeC V3 board

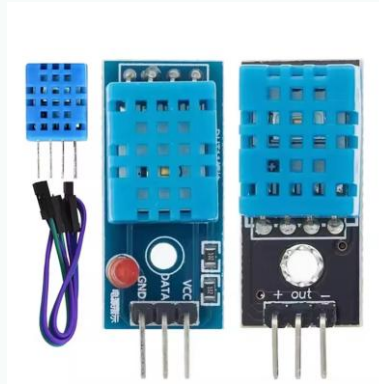

DHT11




BMP280 on the board

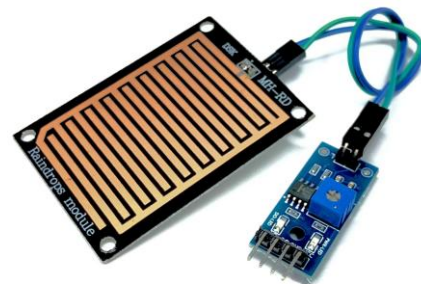

Raindrops Module

- AALeC V3 board with ESP8266 controller
- OLED display for local values and status
- DHT11 module for temperature and humidity
- BMP280 pressure sensor for atmospheric pressure
- Raindrops Module for dry / raining status
- RGB LEDs and buzzer for visual/acoustic warning
- Publishes sensor data to HiveMQ over Wi-Fi.

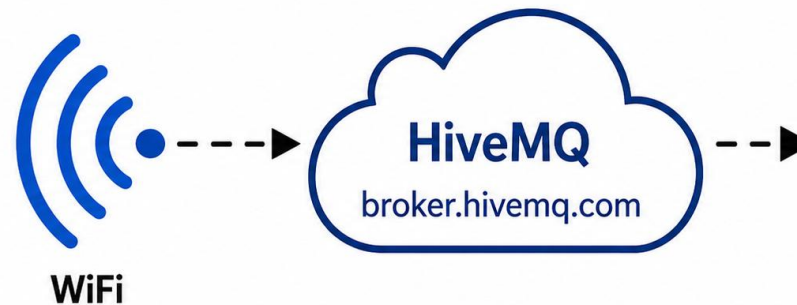

MQTT TOPICS

- home/dht11/temperature
- home/dht11/humidity
- home/bmp280/pressure
- home/rain/status
- home/4sensors/datatogether

How the sensors work

DHT11

sends temperature and humidity's digital data

DHT11 measures temperature and relative humidity. It contains a humidity element and a thermistor, then outputs digital values readable by the controller.

BMP280


pressure sensing element
pressure changes electrical response

The BMP280 pressure sensor converts atmospheric pressure changes into a digital pressure value. Only pressure is used from this sensor in the final system.


RAINDROPS SENSOR

raindrops module
analog + digital output

The raindrop sensor detects droplets through resistance changes. This module gives an analog moisture value and a digital Dry/Rain decision.

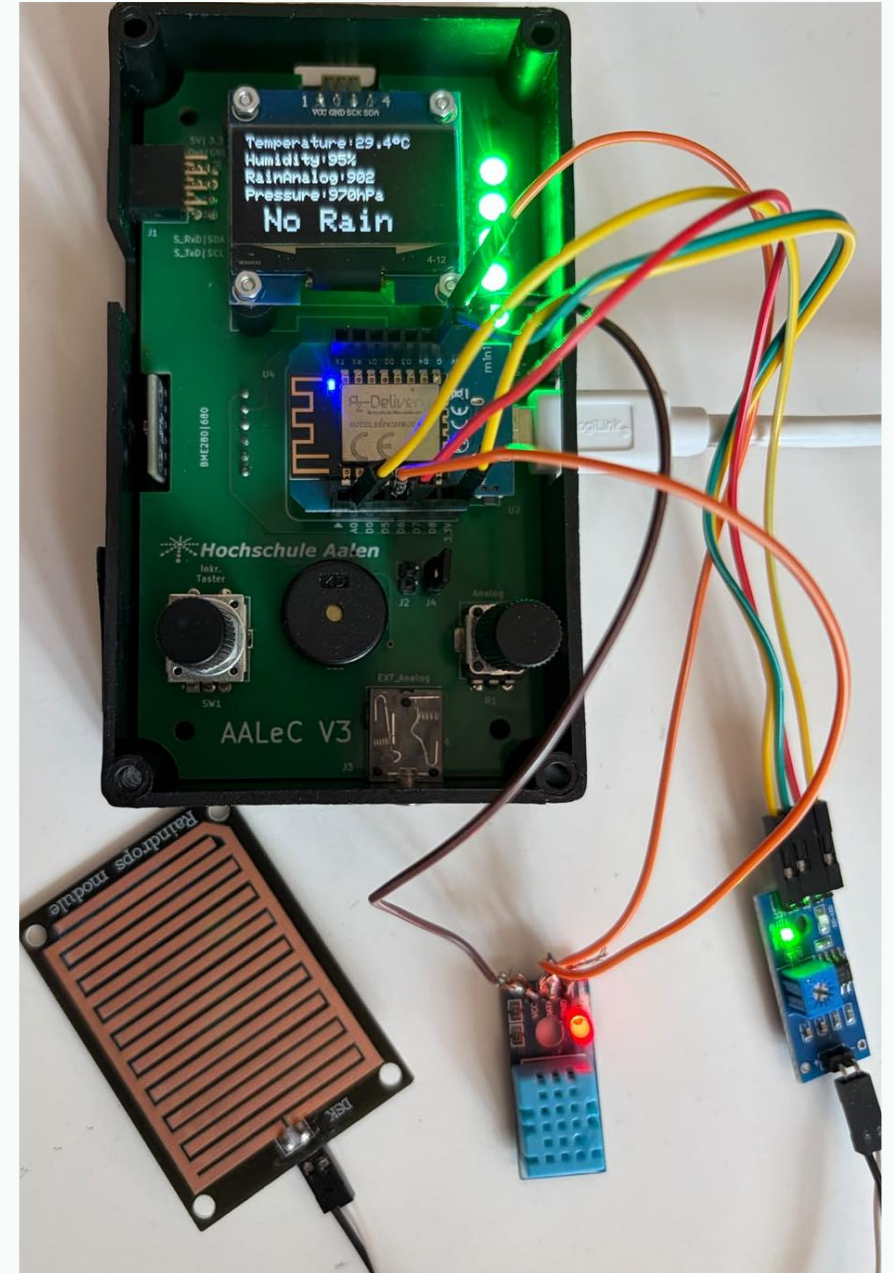


Final system overview

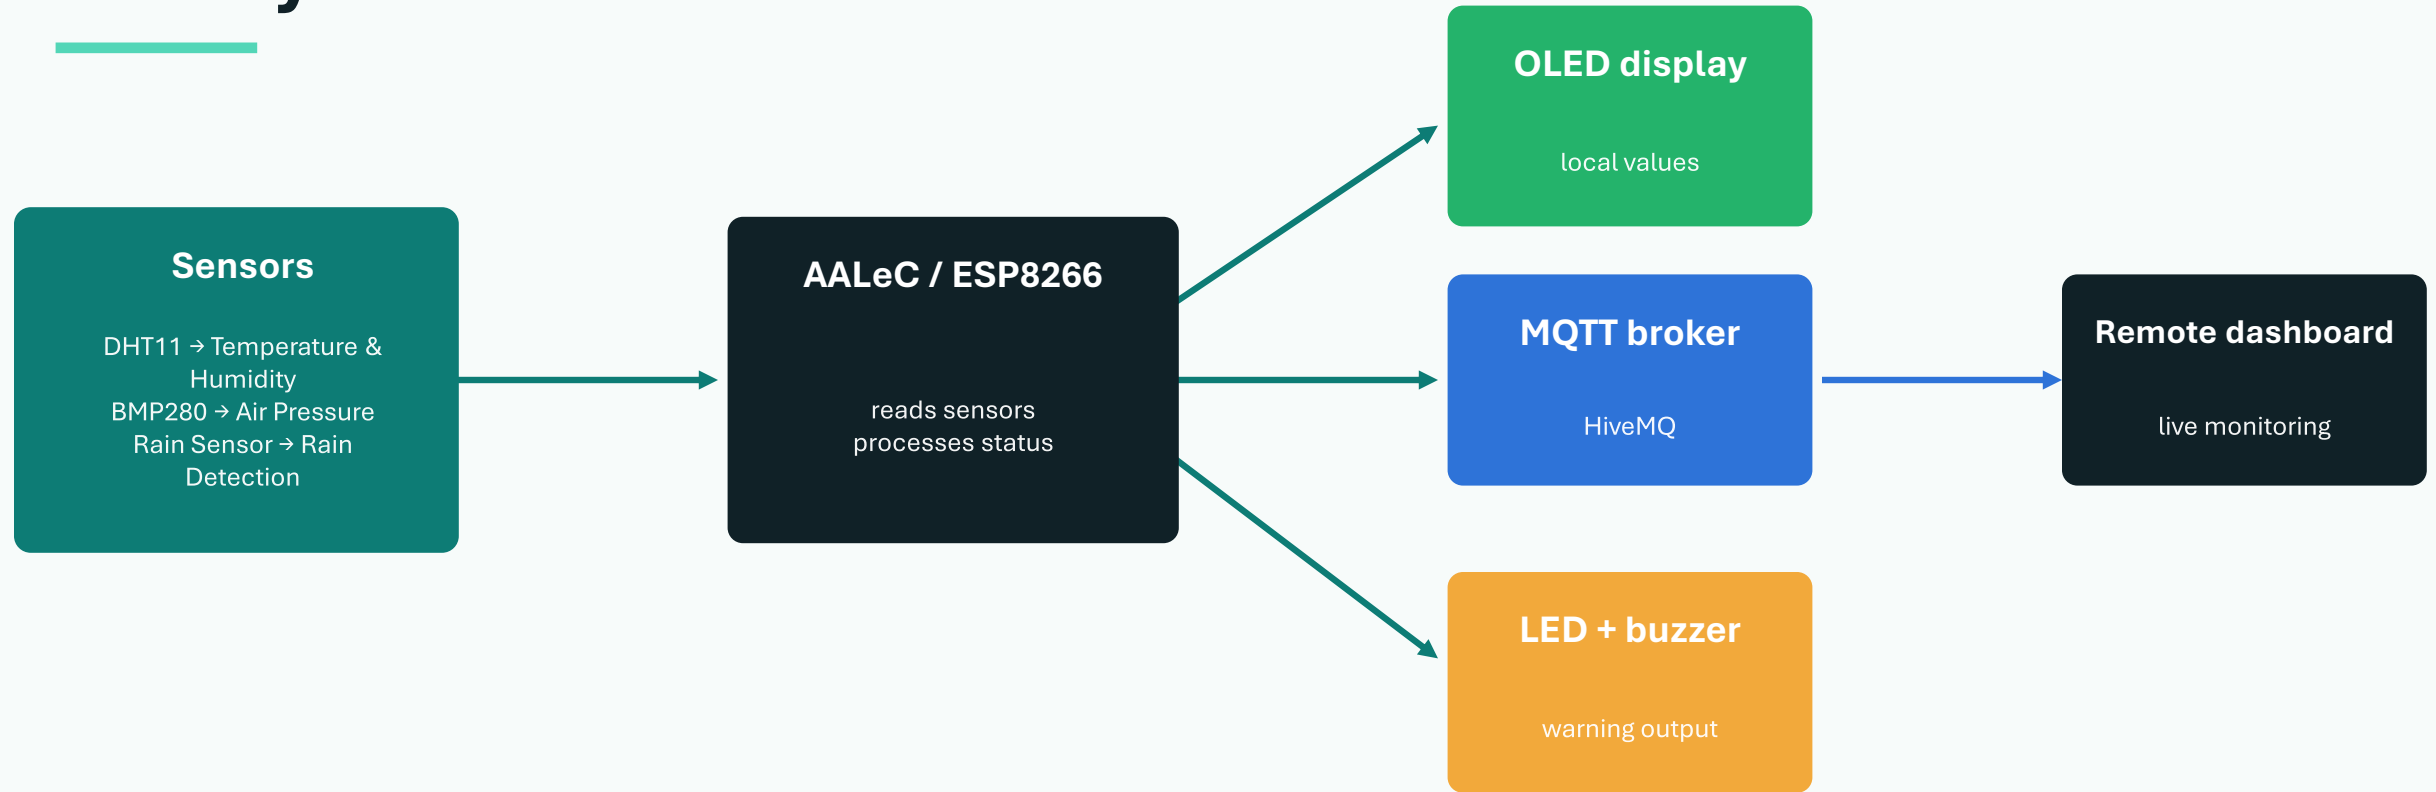

Local feedback and remote monitoring run in parallel: the device remains useful even without the dashboard.

Wiring and interfaces

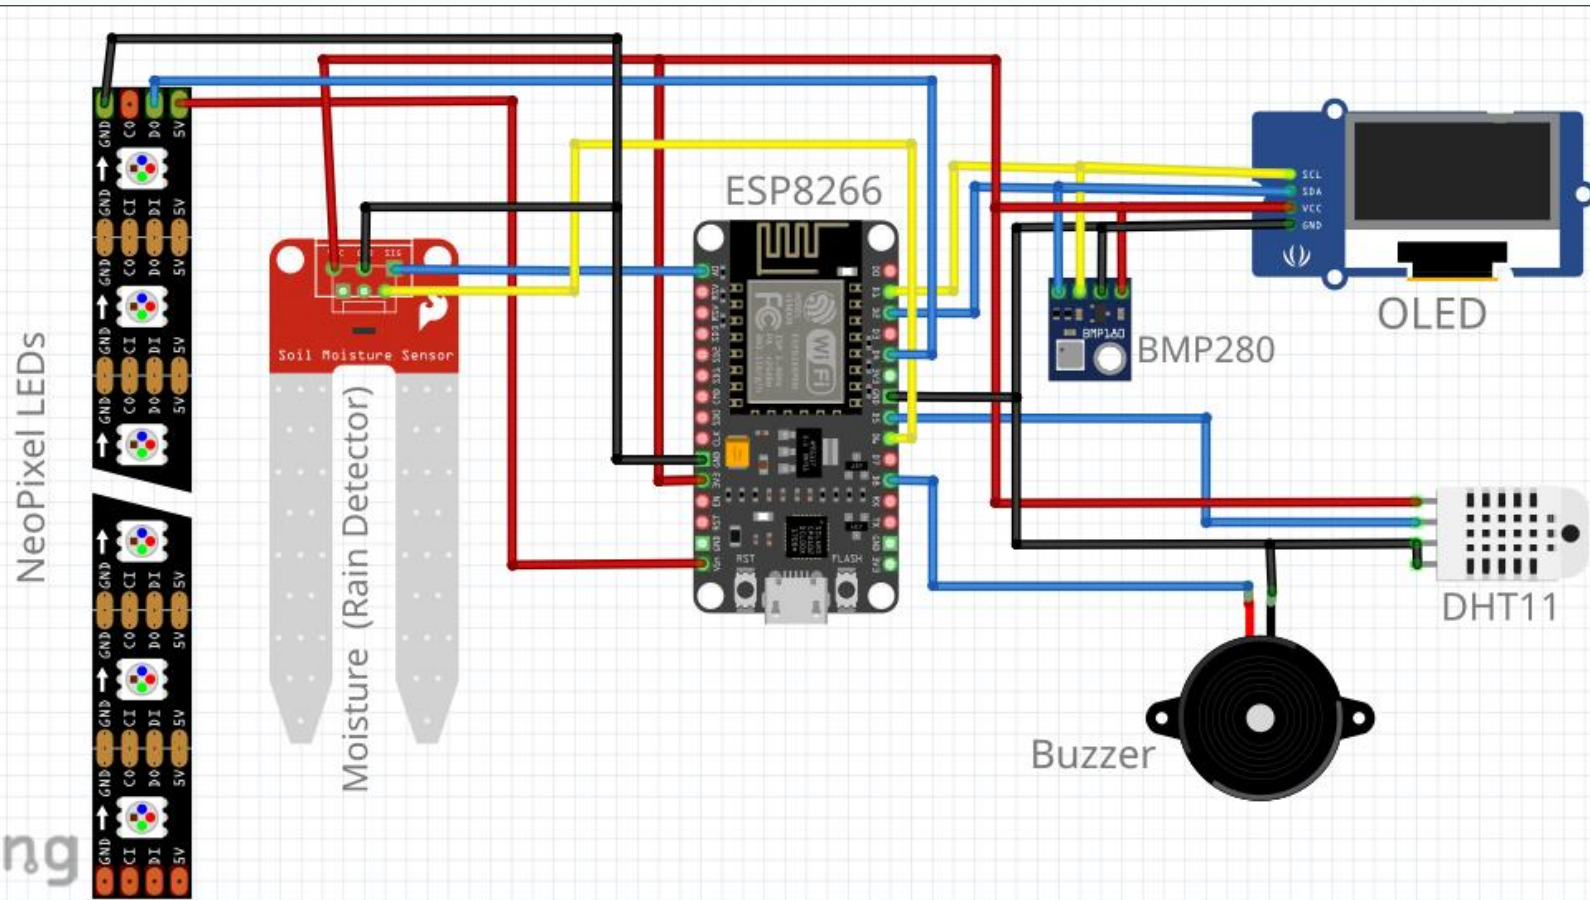

Device	Pin
DHT11	D5 (GPIO14)
Rain Digital	D6 (GPIO12)
Rain Analog	A0
BMP280	I ² C (SDA=D2, SCL=D1)
OLED	I ² C (SDA=D2, SCL=D1)
Buzzer	GPIO15 (D8)
NeoPixel LEDs	GPIO2 (D4)

Libraries and Codes:

Libraries Used to communicate:

- ESP8266WiFi
- PubSubClient
- Wire.h
- DHT
- Adafruit BMP280
- Adafruit GFX
- Adafruit SH110X
- Adafruit NeoPixel
- WifiPassword

Rain Detection Logic:

```
bool isRaining = (digitalValue == LOW);
int rainPercent = map(analogValue, 1023, 0);
```

```
if (isRaining) {
    tone(BUZZER_PIN, 880);
    setAllPixels(strip.Color(120,0,0));
}
else {
    noTone(BUZZER_PIN);
    setAllPixels(strip.Color(0,120,0));
}
```

Sensor's code:

```
int analogValue = analogRead(rainAnalogPin);
int digitalValue = digitalRead(rainDigitalPin);

float temp = dht.readTemperature();
float hum = dht.readHumidity();
float pressure = bmpOK ? bmp.readPressure() / 100.0F : 0;
```

HiveMQ:

```
client.publish("home/dht11/temperature", t);
client.publish("home/dht11/humidity", h);
client.publish("home/bmp280/pressure", p);
client.publish("home/rain/status", rainStatus);

client.publish("home/4sensors/datatogether",
allData);
```


Setup and configuration

1 Connect hardware

DHT11, rain sensor, OLED, pressure sensor, LED/buzzer on the AALeC board.

2 Configure network


Set Wi-Fi SSID/password and MQTT broker address in the code.

3 Upload and test



Upload the code to ESP8266, open serial monitor, then subscribe to MQTT topics.

4 Demonstrate functionality

Show OLED output, rain sensor response, LED/buzzer behavior and MQTT dashboard.

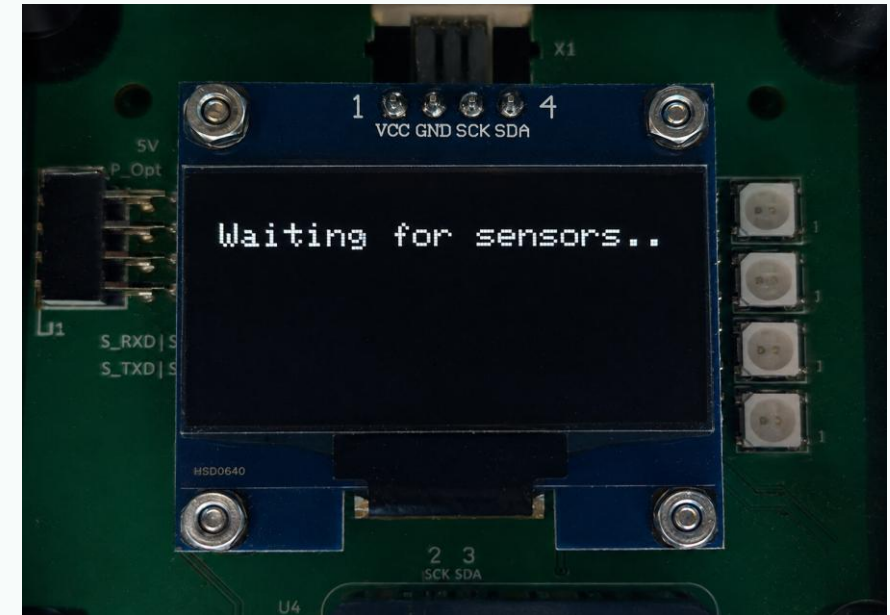

Local display and warning behavior

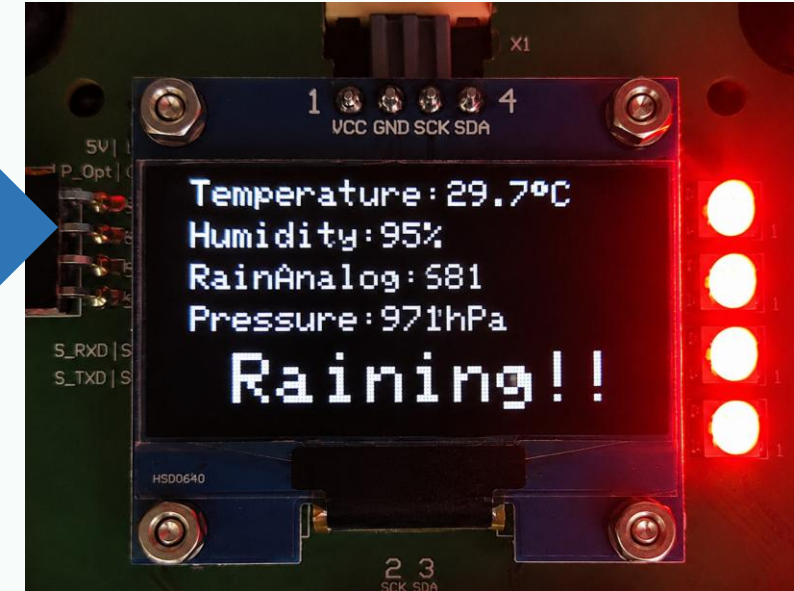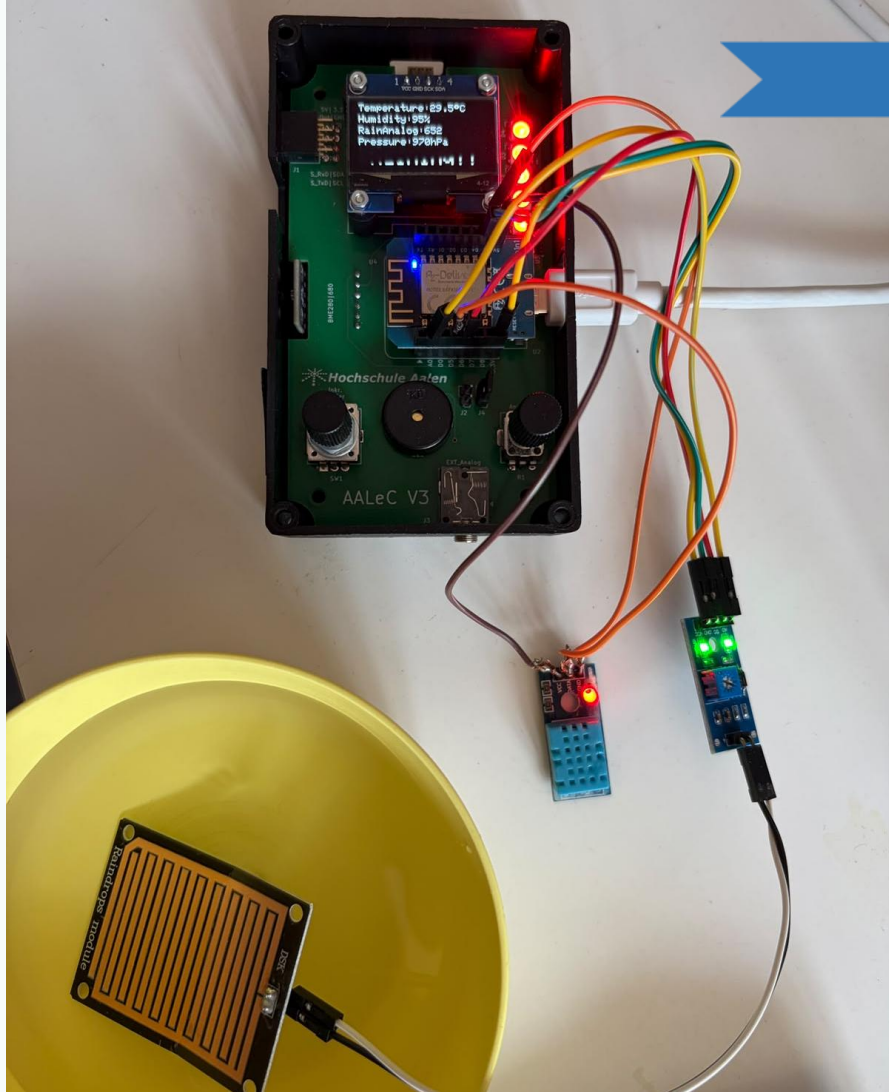

The OLED and LEDs show the current state directly on the device, while Serial Monitor / MQTT are used for debugging and proof of data flow.

Dry:


- Green LEDs ON
- OLED shows "No Rain"

Rain Detected:

- Red LEDs blinking
- Buzzer ON
- OLED shows "Raining!!" Analog rain value allows more detailed moisture intensity observation.


Analog rain value allows more detailed observation.

Final result

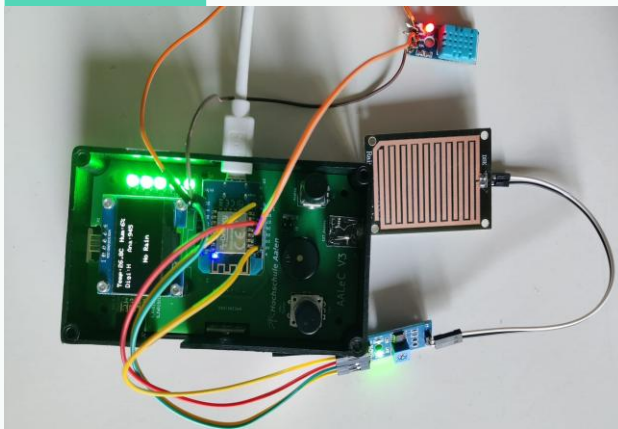

Dry / normal state

- OLED shows values and No Rain.
- Green LEDs indicate normal condition.
- Analog rain value remains high.

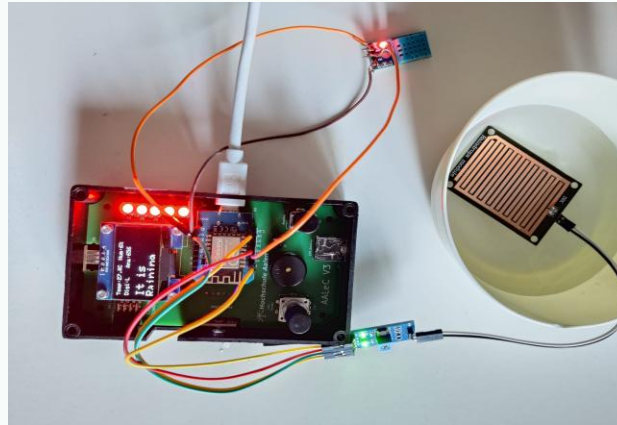

Raining detected

- Water on the rain module lowers the analog value.
- Digital state changes to rain.
- OLED and LEDs switch to warning state.



```

Temperature: 29.9 °C | Humidity: 95% | Air Pressure: 969.9 hPa | Rain Analog: 902 | Digital State: Dry | Rain Status: No Rain | Alarm OFF
Temperature: 29.9 °C | Humidity: 95% | Air Pressure: 969.9 hPa | Rain Analog: 902 | Digital State: Dry | Rain Status: No Rain | Alarm OFF
Temperature: 29.9 °C | Humidity: 95% | Air Pressure: 969.9 hPa | Rain Analog: 902 | Digital State: Dry | Rain Status: No Rain | Alarm OFF
Temperature: 29.9 °C | Humidity: 95% | Air Pressure: 969.9 hPa | Rain Analog: 902 | Digital State: Dry | Rain Status: No Rain | Alarm OFF
Temperature: 29.8 °C | Humidity: 95% | Air Pressure: 969.9 hPa | Rain Analog: 902 | Digital State: Dry | Rain Status: No Rain | Alarm OFF
Temperature: 29.8 °C | Humidity: 95% | Air Pressure: 969.9 hPa | Rain Analog: 897 | Digital State: Dry | Rain Status: No Rain | Alarm OFF
  
```

Evidence and next steps

- Serial Monitor verifies the transition from Dry to Rain.
- MQTT can publish live values for remote monitoring.

Connection
connected

Publish

Messages

Subscriptions

Add New Topic Subscription

Qos: 2 home/4sensors/data...

2026-06-20 21:13:45 Topic: home/4sensors/datatogether Qos: 0
Temperature=29.2C | Humidity=95% || Pressure=971.1hPa | No Rain


2026-06-20 21:13:43 Topic: home/4sensors/datatogether Qos: 0
Temperature=29.0C | Humidity=95% || Pressure=971.1hPa | No Rain

2026-06-20 21:11:34 Topic: home/4sensors/datatogether Qos: 0
Temperature=29.2C | Humidity=95% || Pressure=971.1hPa | Rain

2026-06-20 21:11:34 Topic: home/4sensors/datatogether Qos: 0
Temperature=29.2C | Humidity=95% || Pressure=971.1hPa | Rain

2026-06-20 21:11:30 Topic: home/4sensors/datatogether Qos: 0
Temperature=29.3C | Humidity=95% || Pressure=971.1hPa | Rain



Software stack and code structure

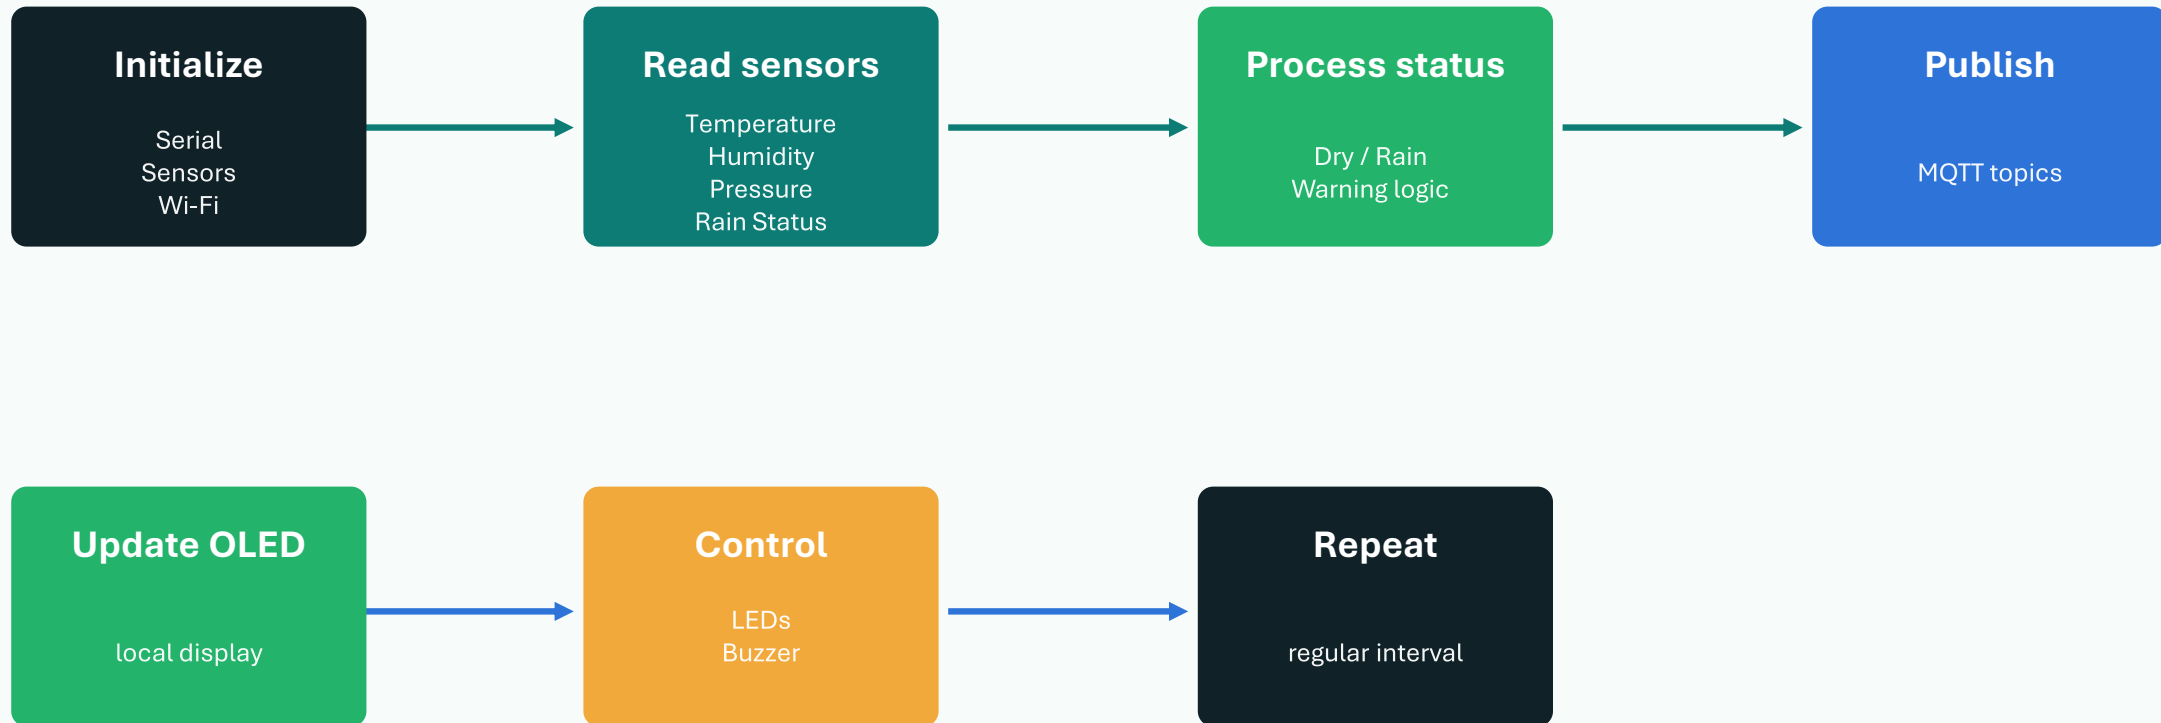



The Arduino/ESP8266 code continuously collects readings, checks the rain state, updates the OLED and publishes values to MQTT at regular intervals.

Problems and workarounds

Implementation issues were part of the project work, so the final documentation should explain them clearly.

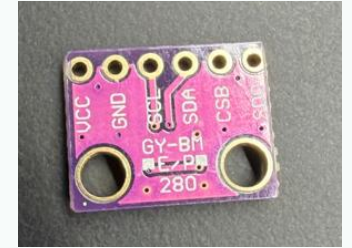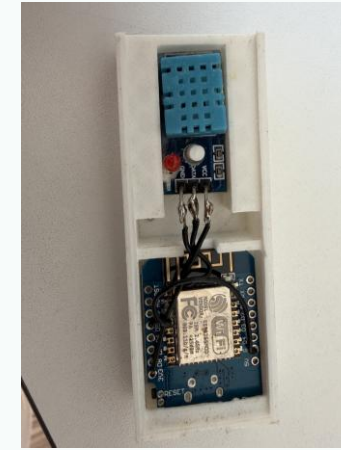


- OLED initially showed noisy pixels; correct SH1106 library fixed the display.
- External BMP/BME module was detected as BMP280, so it did not provide humidity.
- The DHT11 sensor was not functioning when it was linked to the Wi-Fi module (it did not appear in the COM port during testing), so we had to disassemble it to connect it directly to the ESP8266 module.
- AALeC pin conflicts caused failures; DHT11 data was transferred to D5 after individually testing each pin.
- Upload/COM port issue was resolved by individually testing the ESP8266 and identifying that the resistor in AaLeC v3 is the cause of the problem.

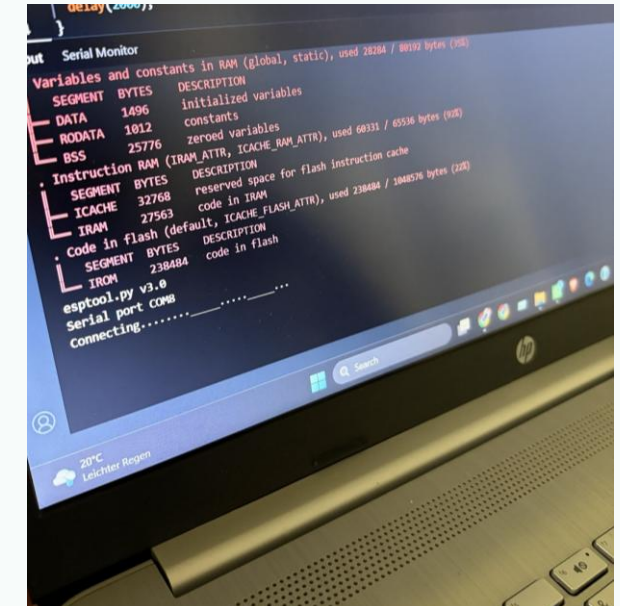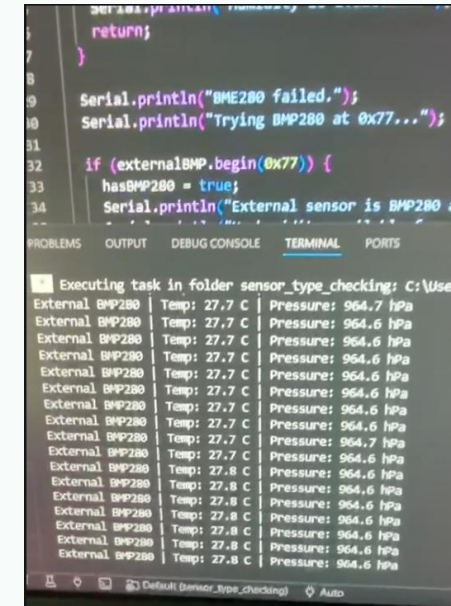

Here are a few images depicting some issues we encountered during the prototype phase.

Demonstration and Conclusion

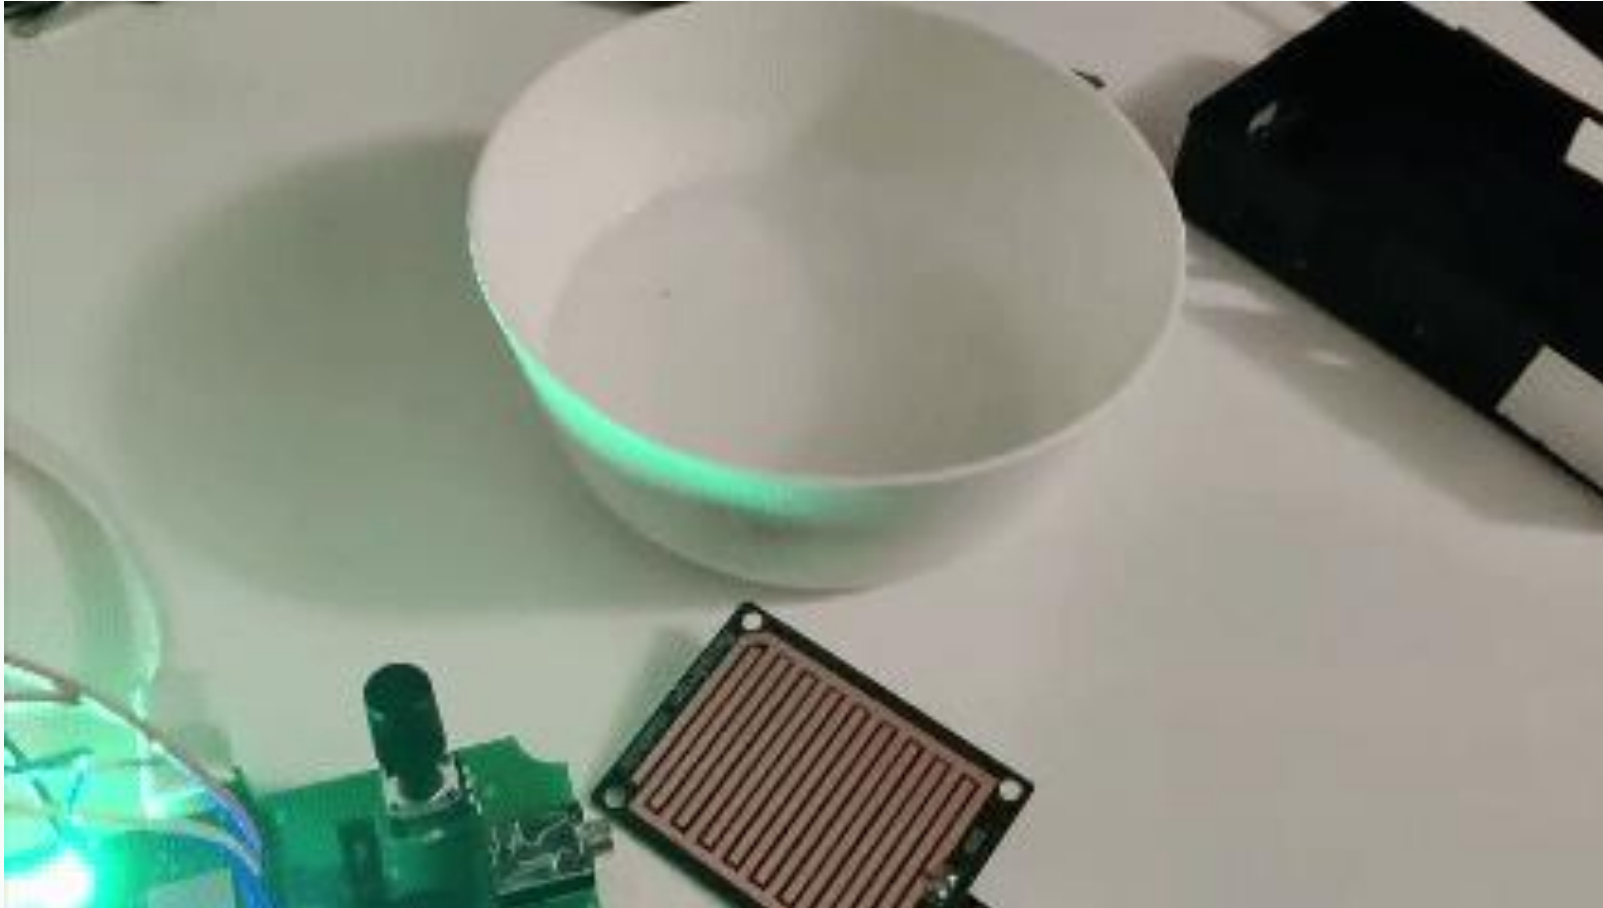

Conclusion

- Successfully monitored temperature, humidity, pressure, and rain status
- Displayed data locally on OLED
- Generated visual and audible alerts
- Published live data to HiveMQ using MQTT
- Demonstrated both local and remote monitoring

Future improvements

- More accurate humidity sensor
- Weather API integration
- Cleaner enclosure/wiring
- Historical dashboard storage

Thank You