
STM32
CubeMX

1. Description

1.1. Project

Project Name	STM32F103-FreeRTOS
Board Name	custom
Generated with:	STM32CubeMX 6.0.0
Date	11/23/2020

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103C6Tx
MCU Package	LQFP48
MCU Pin number	48

1.3. Core(s) information

Core(s)	Arm Cortex-M3

2. Pinout Configuration

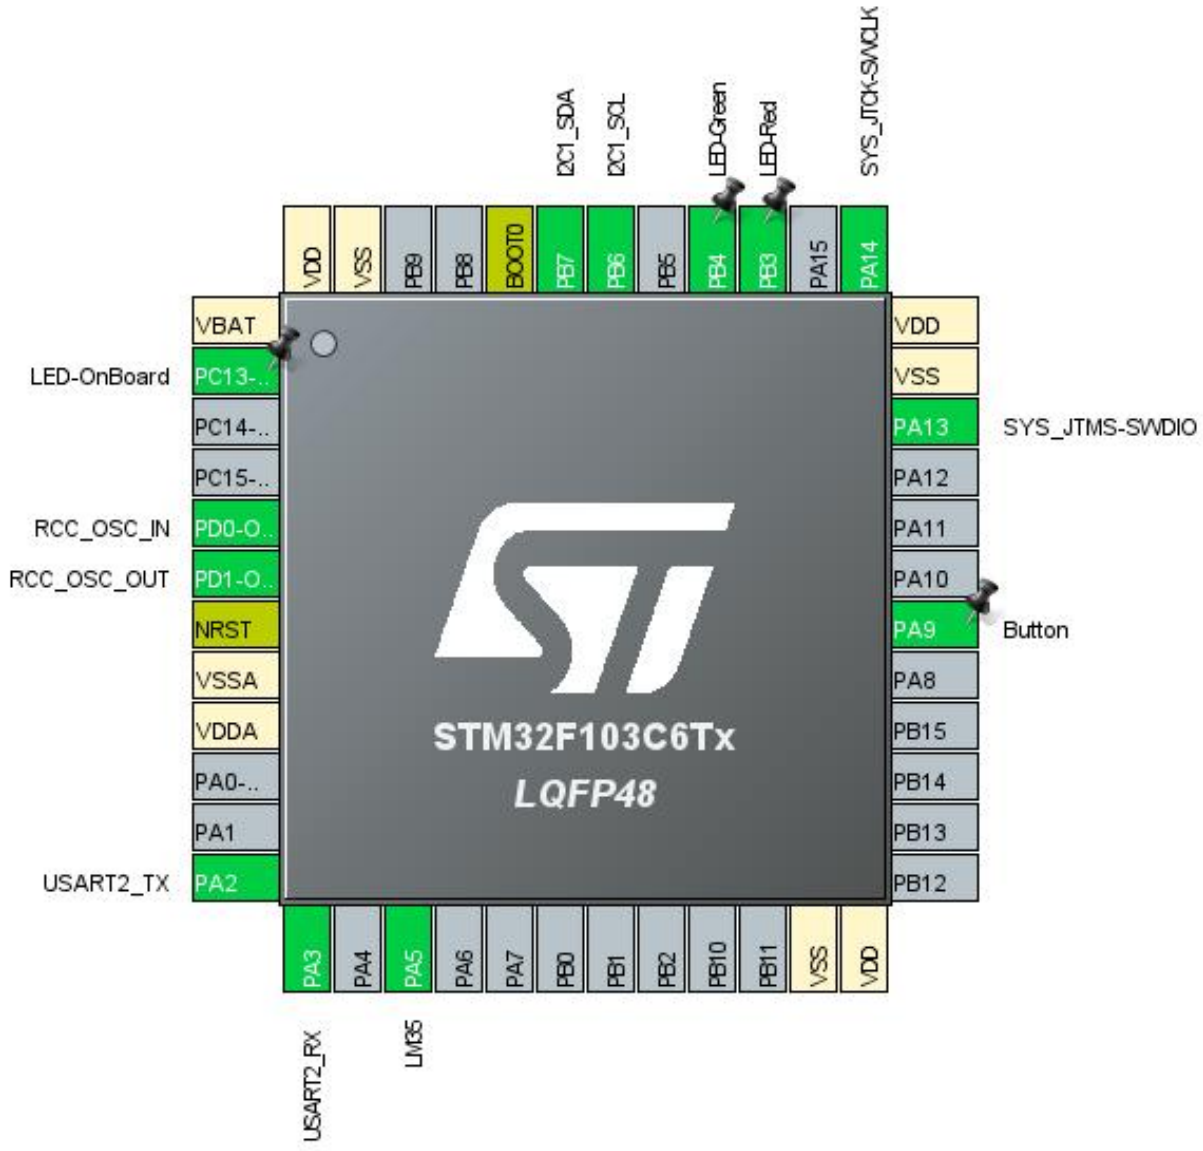

3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13-TAMPER-RTC *	I/O	GPIO_Output	LED-OnBoard
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
12	PA2	I/O	USART2_TX	
13	PA3	I/O	USART2_RX	
15	PA5	I/O	ADC1_IN5	LM35
23	VSS	Power		
24	VDD	Power		
30	PA9	I/O	GPIO_EXTI9	Button
34	PA13	I/O	SYS_JTMS-SWDIO	
35	VSS	Power		
36	VDD	Power		
37	PA14	I/O	SYS_JTCK-SWCLK	
39	PB3 *	I/O	GPIO_Output	LED-Red
40	PB4 *	I/O	GPIO_Output	LED-Green
42	PB6	I/O	I2C1_SCL	
43	PB7	I/O	I2C1_SDA	
44	BOOT0	Boot		
47	VSS	Power		
48	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

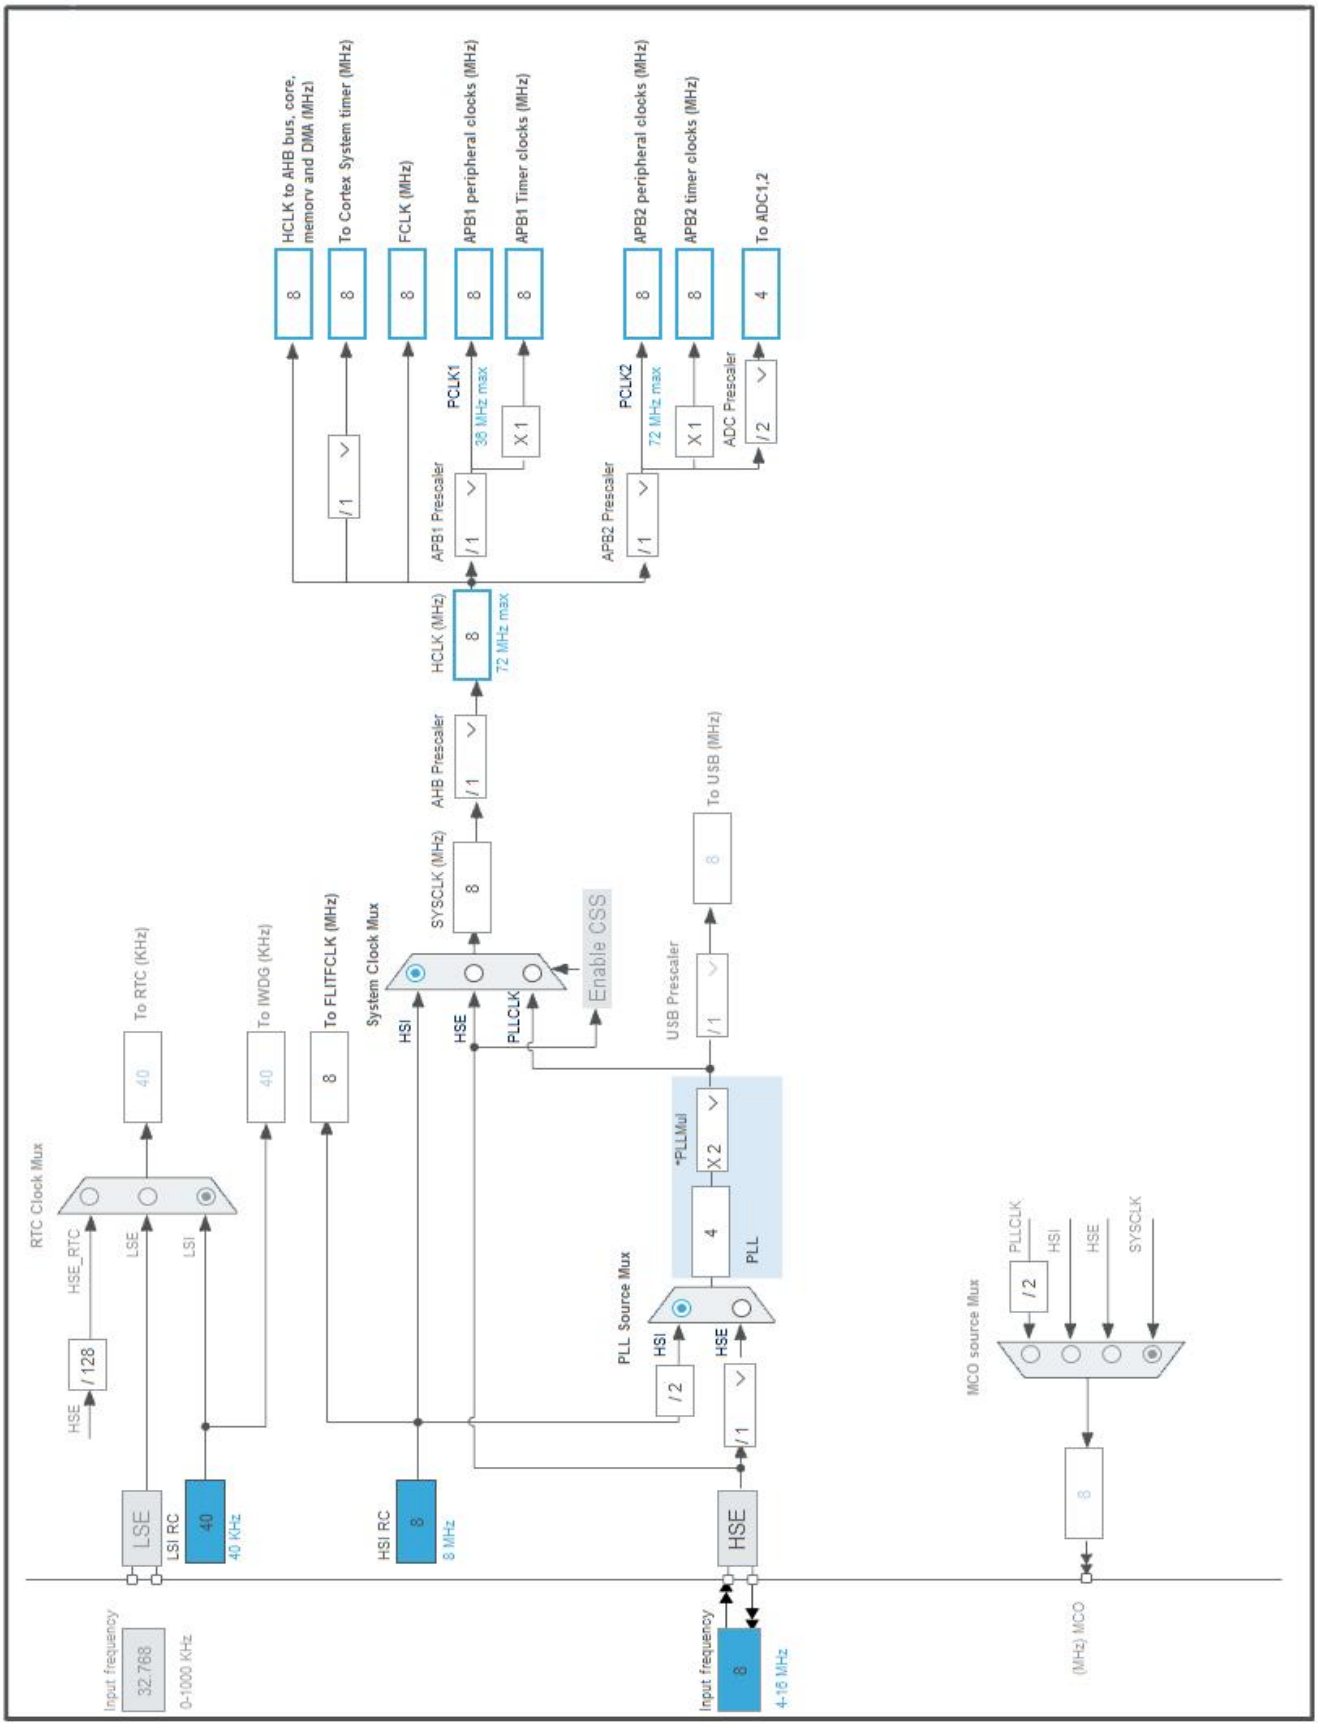

5. Software Project

5.1. Project Settings

Name	Value
Project Name	STM32F103-FreeRTOS
Project Folder	C:\work\STM32CubeIDE\workspace\STM32F103-FreeRTOS
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F1 V1.8.3
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	IP Instance Name
1	MX_GPIO_Init	GPIO
2	MX_DMA_Init	DMA
3	SystemClock_Config	RCC
4	MX_I2C1_Init	I2C1
5	MX_USART2_UART_Init	USART2
6	MX_ADC1_Init	ADC1

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103C6Tx
Datasheet	DS5936_Rev7

6.2. Parameter Selection

Temperature	25
Vdd	3.3

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1

6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	No Scale	No Scale
Fetch Type	FLASH	n/a
CPU Frequency	72 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator_LP
Clock Source Frequency	8 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	24.5 mA	11.7 µA
Duration	0.1 ms	0.9 ms
DMIPS	90.0	0.0
Ta Max	100.55	105
Category	In DS Table	In DS Table

6.5. Results

Sequence Time	1 ms	Average Current	2.46 mA
Battery Life	1 month, 27 days, 1 hour	Average DMIPS	61.0 DMIPS

6.6. Chart

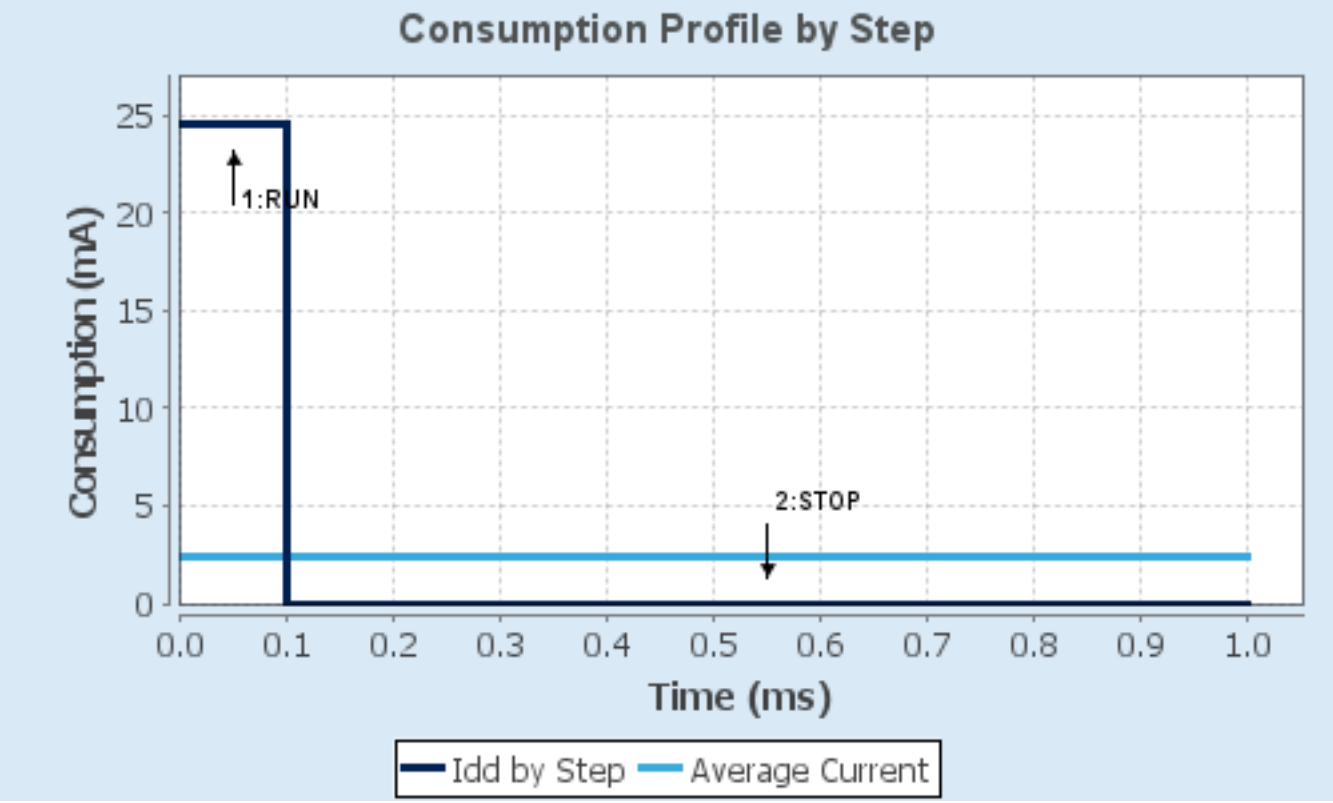
Consumption Profile by Step
Consumption (mA)
25
20
15
10
5
0
1:RUN
2:STOP
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1.0
Time (ms)
Idd by Step
Average Current

7. IPs and Middleware Configuration

7.1. ADC1

mode: IN5

mode: Temperature Sensor Channel

7.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode	Independent mode

ADC_Settings:

Data Alignment	Right alignment
Scan Conversion Mode	Disabled
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled

ADC_Regular_ConversionMode:

Enable Regular Conversions	Enable
Number Of Conversion	1
External Trigger Conversion Source	Regular Conversion launched by software
Rank	1
Channel	**Channel Temperature Sensor ***
Sampling Time	**239.5 Cycles ***

ADC_Injected_ConversionMode:

Enable Injected Conversions	Disable

WatchDog:

Enable Analog WatchDog Mode	false

7.2. GPIO

7.3. I2C1

I2C: I2C

7.3.1. Parameter Settings:

Master Features:

I2C Speed Mode	**Fast Mode ***
I2C Clock Speed (Hz)	400000
Fast Mode Duty Cycle	Duty cycle Tlow/Thigh = 2

Slave Features:

Clock No Stretch Mode	Disabled

Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

7.4. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

7.4.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	0 WS (1 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

7.5. SYS

Debug: Serial Wire

Timebase Source: TIM3

7.6. USART2

Mode: Asynchronous

7.6.1. Parameter Settings:

Basic Parameters:

Baud Rate	**9600 ***
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

7.7. FREERTOS

Interface: CMSIS_V2

7.7.1. Config parameters:

API:

FreeRTOS API	CMSIS v2

Versions:

FreeRTOS version	10.0.1
CMSIS-RTOS version	2.00

Kernel settings:

USE_PREEMPTION	Enabled
CPU_CLOCK_HZ	SystemCoreClock
TICK_RATE_HZ	1000
MAX_PRIORITIES	56
MINIMAL_STACK_SIZE	128
MAX_TASK_NAME_LEN	16
USE_16_BIT_TICKS	Disabled
IDLE_SHOULD_YIELD	Enabled
USE_MUTEXES	Enabled
USE_RECURSIVE_MUTEXES	Enabled
USE_COUNTING_SEMAPHORES	Enabled
QUEUE_REGISTRY_SIZE	8
USE_APPLICATION_TASK_TAG	Disabled
ENABLE_BACKWARD_COMPATIBILITY	Enabled
USE_PORT_OPTIMISED_TASK_SELECTION	Disabled
USE_TICKLESS_IDLE	Disabled
USE_TASK_NOTIFICATIONS	Enabled
RECORD_STACK_HIGH_ADDRESS	Disabled

Memory management settings:

Memory Allocation	Dynamic / Static
TOTAL_HEAP_SIZE	3072
Memory Management scheme	heap_4

Hook function related definitions:

USE_IDLE_HOOK	Disabled
USE_TICK_HOOK	Disabled
USE_MALLOC_FAILED_HOOK	Disabled
USE_DAEMON_TASK_STARTUP_HOOK	Disabled
CHECK_FOR_STACK_OVERFLOW	Disabled

Run time and task stats gathering related definitions:

GENERATE_RUN_TIME_STATS	Disabled

USE_TRACE_FACILITY	Enabled
USE_STATS_FORMATTING_FUNCTIONS	Disabled

Co-routine related definitions:

USE_CO_ROUTINES	Disabled
MAX_CO_ROUTINE_PRIORITIES	2

Software timer definitions:

USE_TIMERS	Enabled
TIMER_TASK_PRIORITY	2
TIMER_QUEUE_LENGTH	10
TIMER_TASK_STACK_DEPTH	256

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY	15
LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY	5

7.7.2. Include parameters:

Include definitions:

vTaskPrioritySet	Enabled
uxTaskPriorityGet	Enabled
vTaskDelete	Enabled
vTaskCleanUpResources	Disabled
vTaskSuspend	Enabled
vTaskDelayUntil	Enabled
vTaskDelay	Enabled
xTaskGetSchedulerState	Enabled
xTaskResumeFromISR	Enabled
xQueueGetMutexHolder	Enabled
xSemaphoreGetMutexHolder	Disabled
pcTaskGetTaskName	Disabled
uxTaskGetStackHighWaterMark	Enabled
xTaskGetCurrentTaskHandle	Disabled
eTaskGetState	Enabled
xEventGroupSetBitFromISR	Disabled
xTimerPendFunctionCall	Enabled
xTaskAbortDelay	Disabled
xTaskGetHandle	Disabled

7.7.3. Advanced settings:

Newlib settings (see parameter description first):

USE_NEWLIB_REENTRANT	Disabled

Project settings:

Use FW pack heap file	Enabled

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA5	ADC1_IN5	Analog mode	n/a	n/a	LM35
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	Pull-up	n/a	
	PB7	I2C1_SDA	Alternate Function Open Drain	Pull-up	n/a	
RCC	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
USART2	PA2	USART2_TX	Alternate Function Push Pull	n/a	**High ***	
	PA3	USART2_RX	Input mode	No pull-up and no pull-down	**n/a**	
GPIO	PC13-TAMPER-RTC	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED-OnBoard
	PA9	GPIO_EXTI9	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	Button
	PB3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED-Red
	PB4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED-Green

8.2. DMA configuration

DMA request	Stream	Direction	Priority
I2C1_RX	DMA1_Channel7	Peripheral To Memory	Low
I2C1_TX	DMA1_Channel6	Memory To Peripheral	Low

I2C1_RX: DMA1_Channel7 DMA request Settings:

Mode:	Normal
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte
Memory Data Width:	Byte

I2C1_TX: DMA1_Channel6 DMA request Settings:

Mode:	Normal
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte
Memory Data Width:	Byte

8.3. NVIC configuration

8.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
RCC global interrupt	true	0	0
DMA1 channel6 global interrupt	true	0	0
DMA1 channel7 global interrupt	true	0	0
ADC1 and ADC2 global interrupts	true	0	0
TIM3 global interrupt	true	0	0
USART2 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
EXTI line[9:5] interrupts	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		

8.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	true	true	false
Hard fault interrupt	true	true	false
Memory management fault	true	true	false
Prefetch fault, memory access fault	true	true	false
Undefined instruction or illegal state	true	true	false
System service call via SWI instruction	true	false	false
Debug monitor	true	true	false
Pendable request for system service	true	false	false
System tick timer	true	false	false
RCC global interrupt	true	true	false
DMA1 channel6 global interrupt	true	true	true
DMA1 channel7 global interrupt	true	true	true
ADC1 and ADC2 global interrupts	true	true	true

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
TIM3 global interrupt	true	true	true
USART2 global interrupt	true	true	true

*** User modified value**

9. System Views

9.1. Category view

9.1.1. Current

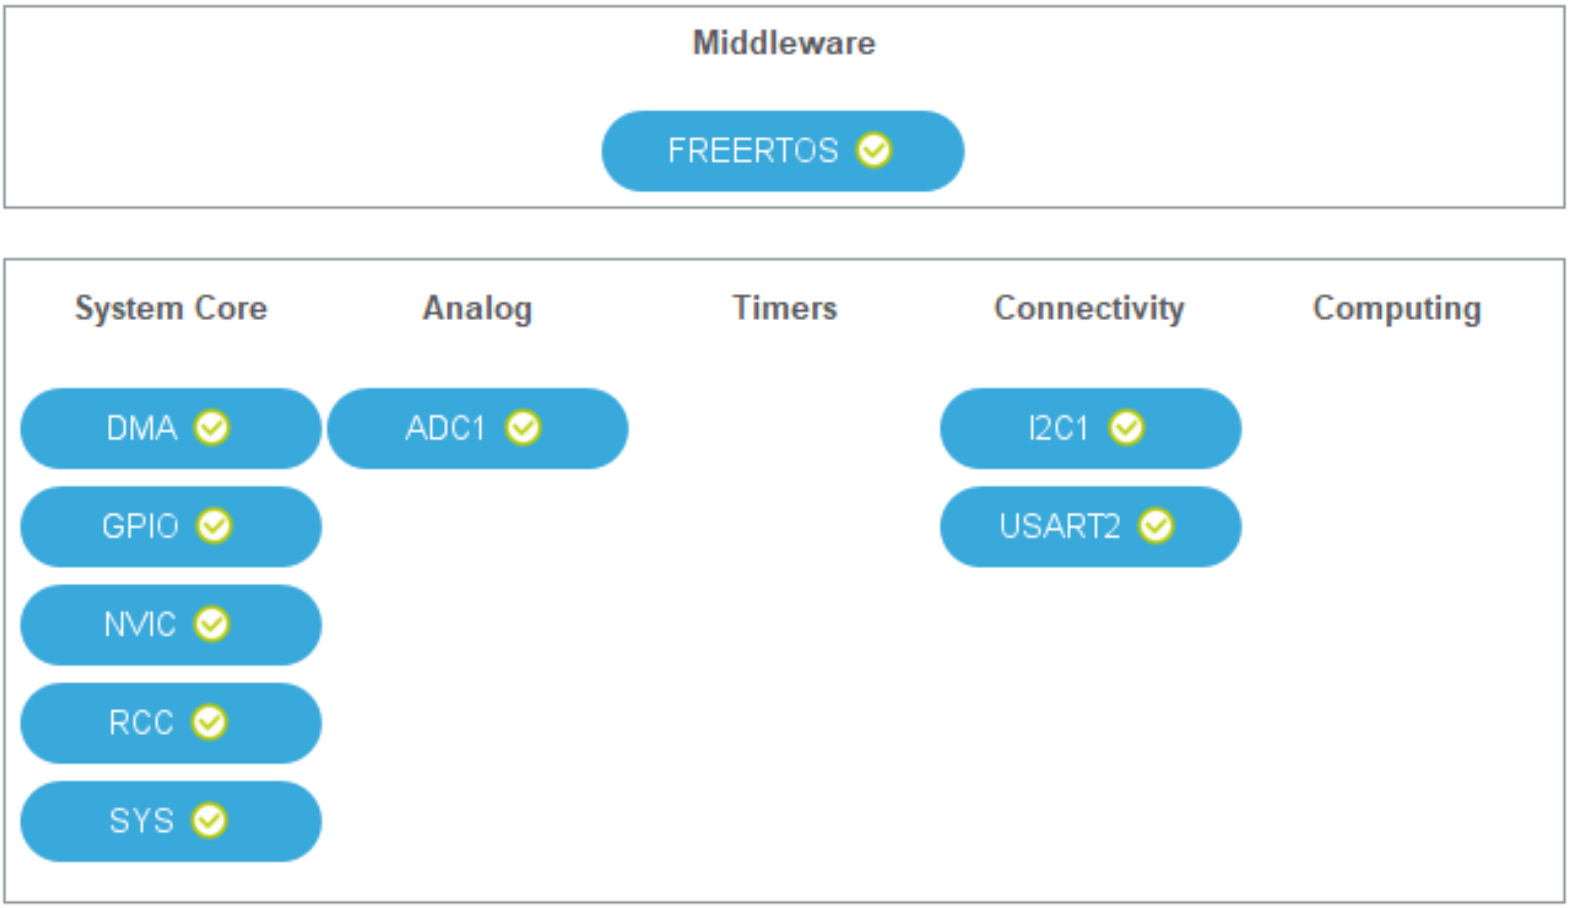

10. Software Pack Report

10.1. Software Pack selected

Vendor	Name	Version	Component
STMicroelectronics	FreeRTOS	0.0.1	Class : CMSIS Group : RTOS2 SubGroup : FreeRTOS Version : 10.2.0 Class : RTOS Group : Core Version : 10.2.0

11. Docs & Resources

Type	Link
Datasheet	http://www.st.com/resource/en/datasheet/CD00210843.pdf
Reference manual	http://www.st.com/resource/en/reference_manual/CD00171190.pdf
Programming manual	http://www.st.com/resource/en/programming_manual/CD00228163.pdf
Programming manual	http://www.st.com/resource/en/programming_manual/CD00283419.pdf
Errata sheet	http://www.st.com/resource/en/errata_sheet/CD00211391.pdf
Application note	http://www.st.com/resource/en/application_note/CD00160362.pdf
Application note	http://www.st.com/resource/en/application_note/CD00164185.pdf
Application note	http://www.st.com/resource/en/application_note/CD00167326.pdf
Application note	http://www.st.com/resource/en/application_note/CD00167594.pdf
Application note	http://www.st.com/resource/en/application_note/CD00211314.pdf
Application note	http://www.st.com/resource/en/application_note/CD00249778.pdf
Application note	http://www.st.com/resource/en/application_note/CD00259245.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264321.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264342.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264379.pdf
Application note	http://www.st.com/resource/en/application_note/DM00024853.pdf
Application note	http://www.st.com/resource/en/application_note/DM00032987.pdf
Application note	http://www.st.com/resource/en/application_note/DM00033267.pdf
Application note	http://www.st.com/resource/en/application_note/DM00033344.pdf
Application note	http://www.st.com/resource/en/application_note/DM00042534.pdf
Application note	http://www.st.com/resource/en/application_note/DM00052530.pdf
Application note	http://www.st.com/resource/en/application_note/DM00073742.pdf
Application note	http://www.st.com/resource/en/application_note/DM00080497.pdf
Application note	http://www.st.com/resource/en/application_note/DM00129215.pdf

Application note	http://www.st.com/resource/en/application_note/DM00160482.pdf
Application note	http://www.st.com/resource/en/application_note/DM00156964.pdf
Application note	http://www.st.com/resource/en/application_note/DM00209695.pdf
Application note	http://www.st.com/resource/en/application_note/DM00220769.pdf
Application note	http://www.st.com/resource/en/application_note/DM00257177.pdf
Application note	http://www.st.com/resource/en/application_note/DM00272912.pdf
Application note	http://www.st.com/resource/en/application_note/DM00236305.pdf
Application note	http://www.st.com/resource/en/application_note/DM00296349.pdf
Application note	http://www.st.com/resource/en/application_note/DM00325582.pdf
Application note	http://www.st.com/resource/en/application_note/DM00327191.pdf
Application note	http://www.st.com/resource/en/application_note/DM00354244.pdf
Application note	http://www.st.com/resource/en/application_note/DM00315319.pdf
Application note	http://www.st.com/resource/en/application_note/DM00380469.pdf
Application note	http://www.st.com/resource/en/application_note/DM00395696.pdf
Application note	http://www.st.com/resource/en/application_note/DM00493651.pdf
Application note	http://www.st.com/resource/en/application_note/DM00536349.pdf