



1. Description

1.1. Project

Project Name	nucleol476_tgfx_ili9341_breakout
Board Name	NUCLEO-L476RG
Generated with:	STM32CubeMX 6.15.0
Date	10/04/2025


1.2. MCU

MCU Series	STM32L4
MCU Line	STM32L4x6
MCU name	STM32L476RGTx
MCU Package	LQFP64
MCU Pin number	64

1.3. Core(s) information

Core(s)	Arm Cortex-M4
---------	---------------

2. Pinout Configuration

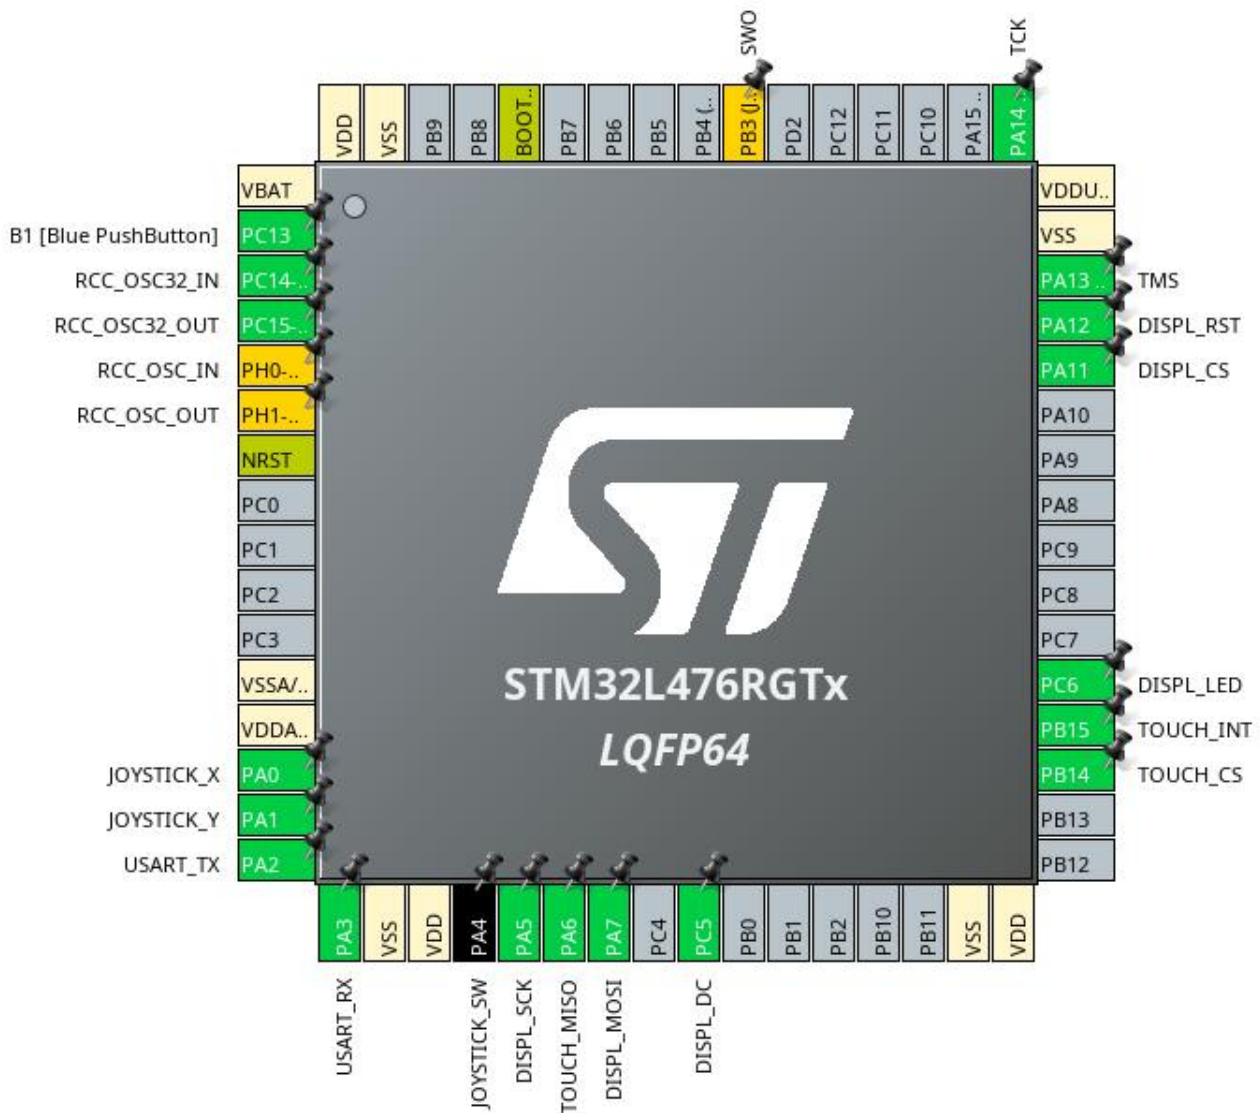


3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN (PC14)	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT (PC15)	I/O	RCC_OSC32_OUT	
5	PH0-OSC_IN (PH0) *	I/O	RCC_OSC_IN	
6	PH1-OSC_OUT (PH1) *	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA/VREF-	Power		
13	VDDA/VREF+	Power		
14	PA0	I/O	ADC1_IN5	JOYSTICK_X
15	PA1	I/O	ADC1_IN6	JOYSTICK_Y
16	PA2	I/O	USART2_TX	USART_TX
17	PA3	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
20	PA4 **	I/O	GPIO_Input	JOYSTICK_SW
21	PA5	I/O	SPI1_SCK	DISPL_SCK
22	PA6	I/O	SPI1_MISO	TOUCH_MISO
23	PA7	I/O	SPI1_MOSI	DISPL_MOSI
25	PC5 **	I/O	GPIO_Output	DISPL_DC
31	VSS	Power		
32	VDD	Power		
35	PB14 **	I/O	GPIO_Output	TOUCH_CS
36	PB15	I/O	GPIO_EXTI15	TOUCH_INT
37	PC6 **	I/O	GPIO_Output	DISPL_LED
44	PA11 **	I/O	GPIO_Output	DISPL_CS
45	PA12 **	I/O	GPIO_Output	DISPL_RST
46	PA13 (JTMS-SWDIO)	I/O	SYS_JTMS-SWDIO	TMS
47	VSS	Power		
48	VDDUSB	Power		
49	PA14 (JTCK-SWCLK)	I/O	SYS_JTCK-SWCLK	TCK
55	PB3 (JTDO-TRACESWO) *	I/O	SYS_JTDO-SWO	SWO
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

** The pin is affected with an I/O function

* The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

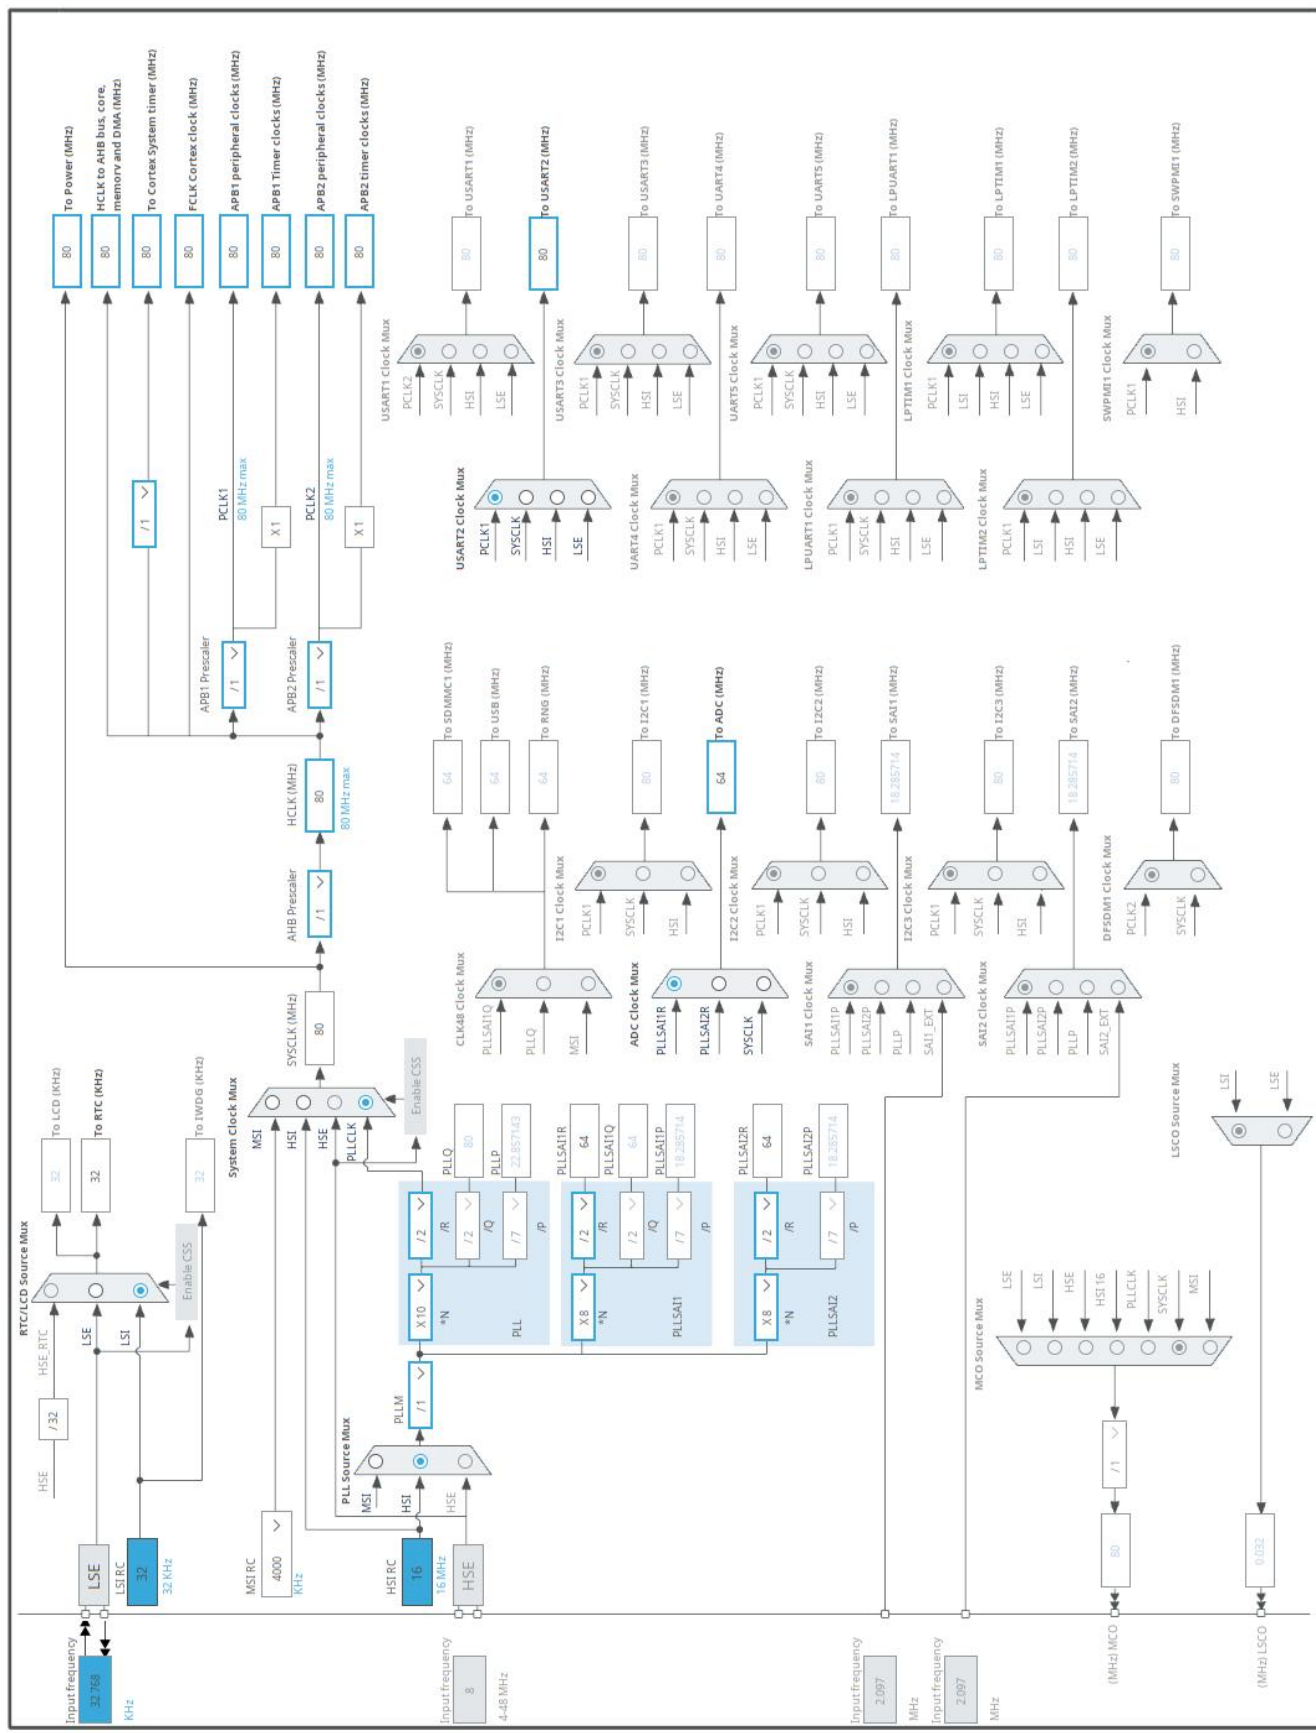

1. Power Consumption Calculator report

1.1. Microcontroller Selection

Series	STM32L4
Line	STM32L4x6
MCU	STM32L476RGTx
Datasheet	DS10198_Rev4

1.2. Parameter Selection

Temperature	25
Vdd	3.0

1.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


1.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP2
Vdd	3.0	3.0
Voltage Source	Battery	Battery
Range	Range1-High	NoRange
Fetch Type	SRAM2	n/a
CPU Frequency	80 MHz	0 Hz
Clock Configuration	HSE PLL	ALL CLOCKS OFF
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	10.7 mA	1.18 μ A
Duration	0.1 ms	0.9 ms
DMIPS	100.0	0.0
Ta Max	103.56	105
Category	In DS Table	In DS Table

1.5. Results

Sequence Time	1 ms	Average Current	1.07 mA
Battery Life	4 months, 10 days, 3 hours	Average DMIPS	100.0 DMIPS

1.6. Chart

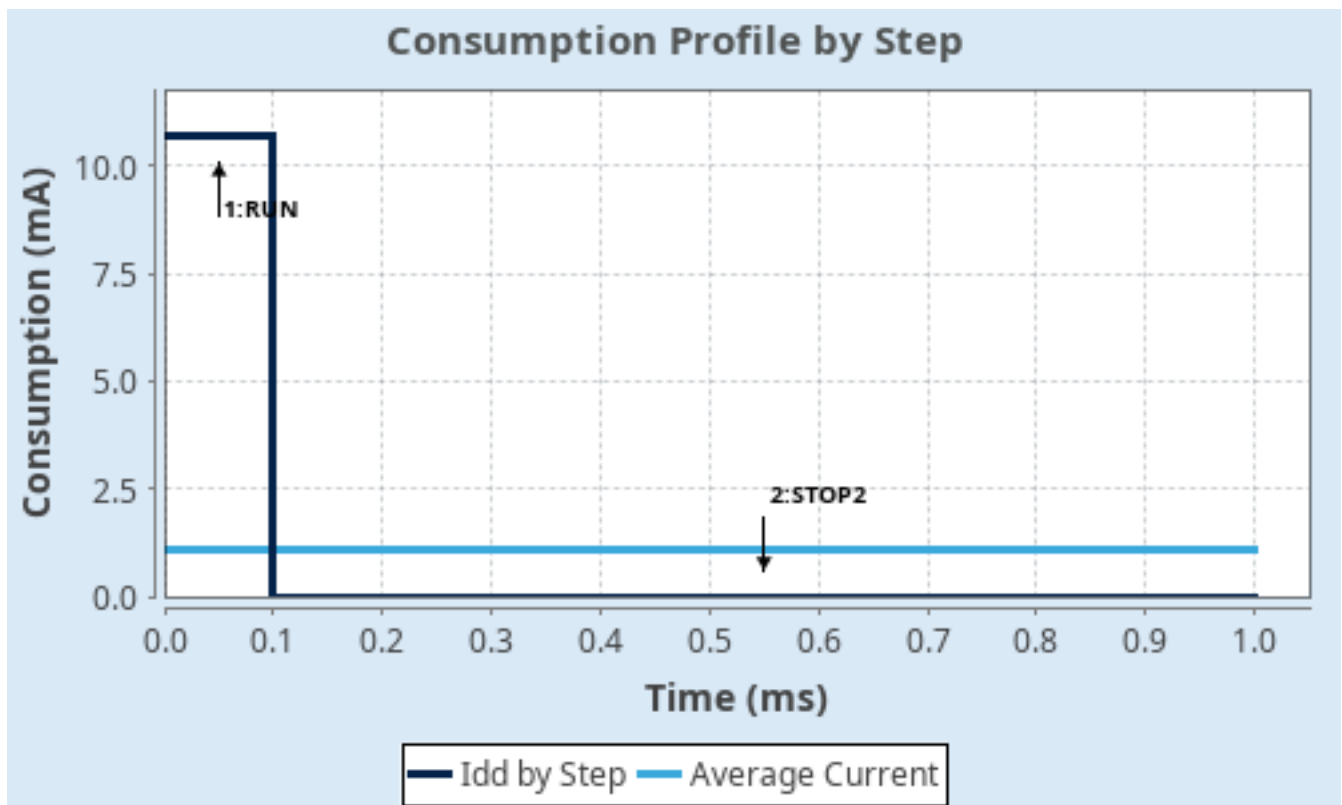

2. Software Project

2.1. Project Settings

Name	Value
Project Name	nucleol476_tgfx_ili9341_breakout
Project Folder	/home/mdundas/STM32CubeIDE/workspace_1.19.0/nucleol476_tgfx_ili9341_bre
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_L4 V1.18.1
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

2.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

2.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_DMA_Init	DMA
4	MX_USART2_UART_Init	USART2
5	MX_SPI1_Init	SPI1
6	MX_CRC_Init	CRC
7	MX_TIM3_Init	TIM3
8	MX_ADC1_Init	ADC1
9	MX_RTC_Init	RTC
10	MX_TouchGFX_Init	STMicroelectronics.X-CUBE-TOUCHGFX.4.26.0
11	MX_TouchGFX_Process	STMicroelectronics.X-CUBE-TOUCHGFX.4.26.0

3. Peripherals and Middlewares Configuration

3.1. ADC1

IN5: IN5 Single-ended

IN6: IN6 Single-ended

3.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode Independent mode

ADC_Settings:

Clock Prescaler Asynchronous clock mode divided by 1

Resolution ADC 12-bit resolution

Data Alignment Right alignment

Scan Conversion Mode Enabled

Continuous Conversion Mode Disabled

Discontinuous Conversion Mode Disabled

DMA Continuous Requests Disabled

End Of Conversion Selection End of single conversion

Overrun behaviour Overrun data preserved

Low Power Auto Wait Disabled

ADC_Regular_ConversionMode:

Enable Regular Conversions Enable

Enable Regular Oversampling Disable

Number Of Conversion **2 ***

External Trigger Conversion Source Regular Conversion launched by software

External Trigger Conversion Edge None

Rank 1

Channel Channel 5

Sampling Time **640.5 Cycles ***

Offset Number No offset

Rank **2 ***

Channel **Channel 6 ***

Sampling Time **640.5 Cycles ***

Offset Number No offset

ADC_Injected_ConversionMode:

Enable Injected Conversions Disable

Analog Watchdog 1:

Enable Analog WatchDog1 Mode false

Analog Watchdog 2:

Enable Analog WatchDog2 Mode false

Analog Watchdog 3:

Enable Analog WatchDog3 Mode false

3.2. CRC

mode: Activated

3.2.1. Parameter Settings:

Basic Parameters:

Default Polynomial State Enable

Default Init Value State Enable

Advanced Parameters:

Input Data Inversion Mode None

Output Data Inversion Mode Disable

Input Data Format Bytes

3.3. RCC

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

3.3.1. Parameter Settings:

System Parameters:

VDD voltage (V) 3.3

Instruction Cache Enabled

Prefetch Buffer **Enabled ***

Data Cache Enabled

Flash Latency(WS) 4 WS (5 CPU cycle)

RCC Parameters:

HSI Calibration Value 16

MSI Calibration Value 0

MSI Auto Calibration Disabled

HSE Startup Timeout Value (ms) 100

LSE Startup Timeout Value (ms) 5000

Power Parameters:

Power Regulator Voltage Scale Power Regulator Voltage Scale 1

3.4. RTC

mode: Activate Clock Source

3.4.1. Parameter Settings:

General:

Hour Format	Hourformat 24
Asynchronous Predivider value	127
Synchronous Predivider value	255

3.5. SPI1

Mode: Full-Duplex Master

3.5.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits *
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	40.0 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software

3.6. SYS

Debug: Serial Wire

Timebase Source: SysTick

3.7. TIM3

Clock Source : Internal Clock

3.7.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	8000-1 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	60 *
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable
Trigger Output (TRGO) Parameters:	
Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)

3.8. USART2

Mode: Asynchronous

3.8.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

3.9. STMicroelectronics.X-CUBE-TOUCHGFX.4.26.0

mode: GraphicsJjApplication

3.9.1. TouchGFX Generator:

Display:

Interface	Custom
Framebuffer Pixel Format	RGB565
Width	320 *
Height	240 *
Framebuffer Strategy	Partial Buffer - GRAM display *
Number of Blocks	3
Block Size	1920 *
Driver:	
Application Tick Source	Custom
Use DMA2D Accelerator (ChromART)	No
Real-Time Operating System	No OS
Additional Features:	
Partial Framebuffer VSync	Disabled
External Data Reader	Disabled
Vector Rendering	Disabled
Video Decoding:	
Type	Disabled

* User modified value

4. System Configuration

4.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA0	ADC1_IN5	Analog mode for ADC conversion	No pull-up and no pull-down	n/a	JOYSTICK_X
	PA1	ADC1_IN6	Analog mode for ADC conversion	No pull-up and no pull-down	n/a	JOYSTICK_Y
RCC	PC14-OSC32_IN (PC14)	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT (PC15)	RCC_OSC32_OUT	n/a	n/a	n/a	
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	DISPL_SCK
	PA6	SPI1_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	TOUCH_MISO
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	DISPL_MOSI
SYS	PA13 (JTMS-SWDIO)	SYS_JTMS-SWDIO	n/a	n/a	n/a	TMS
	PA14 (JTCK-SWCLK)	SYS_JTCK-SWCLK	n/a	n/a	n/a	TCK
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USART_RX
Single Mapped Signals	PH0-OSC_IN (PH0)	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT (PH1)	RCC_OSC_OUT	n/a	n/a	n/a	
	PB3 (JTDO-TRACESWO)	SYS_JTDO-SWO	n/a	n/a	n/a	SWO
GPIO	PC13	GPIO_EXTI13	External Interrupt Mode with Falling edge trigger detection	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PA4	GPIO_Input	Input mode	Pull-up *	n/a	JOYSTICK_SW

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
	PC5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DISPL_DC
	PB14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	TOUCH_CS
	PB15	GPIO_EXTI15	External Interrupt Mode with Falling edge trigger detection	Pull-up *	n/a	TOUCH_INT
	PC6	GPIO_Output	Output Open Drain *	No pull-up and no pull-down	Low	DISPL_LED
	PA11	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DISPL_CS
	PA12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DISPL_RST

4.2. DMA configuration

DMA request	Stream	Direction	Priority
SPI1_TX	DMA1_Channel3	Memory To Peripheral	Medium *
ADC1	DMA1_Channel1	Peripheral To Memory	Low

SPI1_TX: DMA1_Channel3 DMA request Settings:

Mode: Normal
Peripheral Increment: Disable
Memory Increment: **Enable ***
Peripheral Data Width: Byte
Memory Data Width: Byte

ADC1: DMA1_Channel1 DMA request Settings:

Mode: Normal
Peripheral Increment: Disable
Memory Increment: **Enable ***
Peripheral Data Width: **Word ***
Memory Data Width: **Word ***

4.3. NVIC configuration

4.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
DMA1 channel1 global interrupt	true	0	0
DMA1 channel3 global interrupt	true	0	0
ADC1 and ADC2 interrupts	true	0	0
TIM3 global interrupt	true	0	0
SPI1 global interrupt	true	0	0
EXTI line[15:10] interrupts	true	0	0
PVD/PVM1/PVM2/PVM3/PVM4 interrupts through EXTI lines 16/35/36/37/38	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
USART2 global interrupt	unused		
FPU global interrupt	unused		

4.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Prefetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true
DMA1 channel1 global interrupt	false	true	true
DMA1 channel3 global interrupt	false	true	true
ADC1 and ADC2 interrupts	false	true	true

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
TIM3 global interrupt	false	true	true
SPI1 global interrupt	false	true	true
EXTI line[15:10] interrupts	false	true	true

* User modified value

5. System Views

5.1. Category view

5.1.1. Current

Middleware

Software Packs

X-CUBE-TOUCHGFX

System Core	Analog	Timers	Connectivity	Multimedia	Security	Computing
DMA	ADC1	RTC	SPI1			CRC
GPIO		TIM3	USART2			
NVIC						
RCC						
SYS						

6. Software Pack Report

6.1. Software Pack selected

Vendor	Name	Version	Component
STMicroelectronics	X-CUBE-TOUCHGFX	4.26.0	Class : Graphics Group : Application Variant : TouchGFX Generator Version : 4.26.0

7. Docs & Resources

Type	Link
BSDL files	https://www.st.com/resource/en/bsdl_model/stm32l4_bsdl.zip
IBIS models	https://www.st.com/resource/en/ibis_model/stm32l4_ibis.zip
System View Description	https://www.st.com/resource/en/svd/stm32l4_svd.zip
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_embedded_software_solutions.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_eval-tools_portfolio.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_stm8_functional-safety-packages.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_software_development_tools.pdf
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers-stm32-family-overview.pdf
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers-stm32l4-series-product-overview.pdf
Brochures	https://www.st.com/resource/en/brochure/brstm32ulp.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32l4.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32nucleo.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32trust.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32gui.pdf
Magazine Articles	https://www.st.com/resource/en/magazine/design-elektronik_august2017.pdf
Magazine Articles	https://www.st.com/resource/en/magazine/design-elektronik_october2016.pdf
Product Certifications	https://www.st.com/resource/en/certification_document/sesip-2000002-01-cert.pdf
Product Certifications	https://www.st.com/resource/en/certification_document/sesip-2000002-01-st2.pdf

Product	https://www.st.com/resource/en/certification_document/psa-certificate_stm32l4.pdf
Certifications	
Security Bulletin	https://www.st.com/resource/en/technical_note/tn1489-security-bulletin-tn1489stpsirt-physical-attacks-on-stm32-and-stm32cube-firmware-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an1709-emc-design-guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an2606-stm32-microcontroller-system-memory-boot-mode-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an3126-audio-and-waveform-generation-using-the-dac-in-stm32-products-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an3155-usart-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an3156-usb-dfu-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4221-i2c-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4286-spi-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4555-getting-started-with-stm32l4-series-and-stm32l4-series-hardware-development-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4612-migrating-from-stm32l1-series-to-stm32l4-series-and-stm32l4-series-microcontrollers-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4616-migrating-from-stm32f401-and-stm32f411-lines-to-stm32l4-series-and-stm32l4-series-microcontrollers-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4621-stm32l4-and-stm32l4-ultralowpower-features-overview-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4629-adc-hardware-oversampling-for-microcontrollers-of-the-stm32-l0-and-l4-series-stmicroelectronics.pdf

stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application_note/an4649-migrating-from-stm32f1-series-to-stm32l4-series--stm32l4-series-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4726-stm32cube-firmware-examples-for-stm32l4-series-and-stm32l4-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4729-stm32l0l4-firewall-overview-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4730-using-the-firewall-embedded-in-stm32l0l4l4-series-mcus-for-secure-access-to-sensitive-parts-of-code-and-data-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4746-optimizing-power-and-performance-with-stm32l4-and-stm32l4-series-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4754-migrating-between-stm32l486xx476xx-and-stm32l443xx433xx-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4776-generalpurpose-timer-cookbook-for-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4809-migrating-between-stm32l0-series-and-stm32l4-series--stm32l4-series-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4821-migrating-from-stm32f405415-line-and-stm32f407417-line-to-stm32l4-series-and-stm32l4-series-microcontrollers-stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application_note/an4822-migrating-between-stm32l476xx486xx-and-stm32l496xx4a6xx-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4831-migrating-from-stm32f2x5-line-to-stm32l4-series-and-stm32l4-series-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4832-migrating-from-stm32f303-line-to-stm32l4-series-and-stm32l4-series-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4989-stm32-microcontroller-debug-toolbox-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4990-getting-started-with-sigmadelta-digital-interface-on-applicable-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4995-using-an-electromyogram-technique-to-detect-muscle-activity-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5012-analogtodigital-audio-conversion-example-using-stm32l4-series-microcontroller-peripherals-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5017-migrating-between-stm32l476xx486xx-and-stm32l4-series-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5138-migrating-from-stm32l4-and-stm32l4-to-stm32l5-series-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4760-quadspi-interface-on-stm32-microcontrollers-and-microprocessors-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4899-stm32-microcontroller-gpio-hardware-settings-and-lowpower-consumption-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5612-esd-protection-of-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4991-how-to-wake-up-an-stm32-microcontroller-from-lowpower-mode-with-the-usart-or-the-lpuart-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4838-introduction-to-memory-protection-unit-management-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4879-introduction-to-usb-hardware-and-pcb-guidelines-using-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5372-migrating-from-stm32l4-and-stm32l4--to-stm32u5-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5225-introduction-to-usb-typec-power-delivery-for-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4777-how-to-optimize-power-consumption-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4894-how-to-use-eeeprom-emulation-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5537-how-to-use-adc-oversampling-techniques-to-improve-signal-to-noise-ratio-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5036-guidelines-for-thermal-management-on-stm32-applications-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5690-how-to-use-vrefbuf-peripheral-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4230-introduction-to-random-number-generation-validation-using-the-nist-statistical-test-suite-for-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2548-introduction-to-dma-controller-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2867-guidelines-for-

oscillator-design-on-stm8afals-and-stm32-mcusmpus-
stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3236-how-to-increase-the-number-of-touchkeys-for-touch-sensing-applications-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3960-guidelines-for-esd-for-touch-sensing-applications-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4013-introduction-to-timers-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4277-how-to-use-pwm-shutdown-for-motor-control-and-digital-power-conversion-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4299-how-to-improve-conducted-noise-robustness-for-touch-sensing-applications-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4310-how-to-choose-the-sampling-capacitor-for-touch-sensing-applications-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4312-how-to-design-surface-sensors-for-touch-sensing-applications-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4316-how-to-tune-touch-sensing-applications-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4635-how-to-optimize-lpuart-power-consumption-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4759-introduction-to-using-the-hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-with-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4908-getting-started-with-usart-automatic-baud-rater-detection-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4943-how-to-use-chromart-accelerator-to-refresh-an-lcdtft-display-on-stm32-mcus-stmicroelectronics.pdf

stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5156-introduction-to-security-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5543-guidelines-for-enhanced-spi-communication-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/cd00211314-how-to-optimize-the-adc-accuracy-in-the-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2639-soldering-recommendations-and-package-information-for-leadfree-ecopack2-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5020-introduction-to-digital-camera-interface-dcml-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3154-how-to-use-can-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an6099-migrating-from-stm32l4-to-stm32u0-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4566-how-to-extend-the-dac-performance-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5105-getting-started-with-touch-sensing-control-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5408-migrating-from-stm32l0-stm32l1-and-stm32l4-series-associated-with-sx12xx-transceiver-to-stm32wl5xex-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an6051-migrating-from-stm32l4-and-stm32l4-to-stm32u3-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4044-floating-point-unit-demonstration-on-stm32-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4323-getting-started-with-stemwin-library-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4435-guidelines-for-

for related Tools & Software	obtaining-ulcsaiec-607301603351-class-b-certification-in-any-stm32-application-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an4631-how-to-calibrate-an-stm32l0xx-internal-rc-oscillator-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an4657-stm32-inapplication-programming-iap-using-the-usart-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an4666-parallel-synchronous-transmission-using-gpio-and-dma-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an4701-proprietary-code-readout-protection-on-microcontrollers-of-the-stm32f4-series-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an4726-stm32cube-firmware-examples-for-stm32l4-series-and-stm32l4-series-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an4736-how-to-calibrate-stm32l4-series-microcontrollers-internal-rc-oscillator-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an4758-proprietary-code-readout-protection-on-stm32l4-stm32l4-stm32g4-and-stm32wb-series-mcus-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an4767-onthefly-firmware-update-for-dual-bank-stm32-microcontrollers-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an4834-implementation-of-transmitters-and-receivers-for-infrared-remote-control-protocols-with-stm32cube-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an4841-digital-signal-processing-for-stm32-microcontrollers-using-cmsis-stmicroelectronics.pdf
Application Notes for related Tools	https://www.st.com/resource/en/application_note/an4968-proprietary-code-read-out-protection-pcrop-on-stm32f72xxx-and-stm32f73xxx-

& Software	microcontrollers-stmicroelectronics.pdf
Application Notes for related Tools	https://www.st.com/resource/en/application_note/an5056-integration-guide-for-the-xcubesbsfu-stm32cube-expansion-package-stmicroelectronics.pdf
& Software	stmicroelectronics.pdf
Application Notes for related Tools	https://www.st.com/resource/en/application_note/an5282-using-xcuberccalib-software-to-calibrate-stm32wb-series-internal-rc-oscillators-stmicroelectronics.pdf
& Software	stmicroelectronics.pdf
Application Notes for related Tools	https://www.st.com/resource/en/application_note/an5360-getting-started-with-projects-based-on-the-stm32mp1-series-in-stm32cubeide-stmicroelectronics.pdf
& Software	stmicroelectronics.pdf
Application Notes for related Tools	https://www.st.com/resource/en/application_note/an5361-getting-started-with-projects-based-on-dualcore-stm32h7-microcontrollers-in-stm32cubeide-stmicroelectronics.pdf
& Software	stm32cubeide-stmicroelectronics.pdf
Application Notes for related Tools	https://www.st.com/resource/en/application_note/an5394-getting-started-with-projects-based-on-the-stm32l5-series-in-stm32cubeide-stmicroelectronics.pdf
& Software	stmicroelectronics.pdf
Application Notes for related Tools	https://www.st.com/resource/en/application_note/an5418-how-to-build-a-simple-usbp-d-sink-application-with-stm32cubemx-stmicroelectronics.pdf
& Software	
Application Notes for related Tools	https://www.st.com/resource/en/application_note/an5426-migrating-graphics-middleware-projects-from-stm32cubemx-540-to-stm32cubemx-550-stmicroelectronics.pdf
& Software	550-stmicroelectronics.pdf
Application Notes for related Tools	https://www.st.com/resource/en/application_note/an5564-getting-started-with-projects-based-on-dualcore-stm32wl-microcontrollers-in-stm32cubeide-stmicroelectronics.pdf
& Software	stm32cubeide-stmicroelectronics.pdf
Application Notes for related Tools	https://www.st.com/resource/en/application_note/an4865-lowpower-timer-lptim-applicative-use-cases-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
& Software	stmicroelectronics.pdf
Application Notes for related Tools	https://www.st.com/resource/en/application_note/an5698-adapting-the-xcubestl-functional-safety-package-for-stm32-iec-61508-compliant-to-other-safety-standards-stmicroelectronics.pdf
& Software	other-safety-standards-stmicroelectronics.pdf
Application Notes for related Tools	https://www.st.com/resource/en/application_note/an5731-stm32cubemx-and-stm32cubeide-threadsafe-solution-stmicroelectronics.pdf
& Software	

Application Notes https://www.st.com/resource/en/application_note/an5857-using-xcuberccalib-software-to-calibrate-stm32c0-series-internal-rc-oscillator-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an4502-stm32-smbuspmbus-expansion-package-for-stm32cube-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an5126-how-to-calibrate-internal-oscillators-on-stm32g0-mcus-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an4777-how-to-optimize-power-consumption-on-stm32-mcus-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an5952-how-to-use-cmake-in-stm32cubeide-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an4894-how-to-use-eeeprom-emulation-on-stm32-mcus-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an4635-how-to-optimize-lpuart-power-consumption-on-stm32-mcus-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an5054-how-to-perform-secure-programming-using-stm32cubeprogrammer-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an6179-how-to-integrate-the-stl-firmware-into-a-time-critical-user-application-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an6202-how-to-calibrate-internal-rc-oscillators-on-stm32h5-mcus-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an5676-how-to-calibrate-internal-rc-oscillators-on-stm32u3-and-stm32u5-series-mcus-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an6127-getting-started-

for related Tools & Software	with-stm32h7rx7sx-mcus-in-stm32cubeide-stmicroelectronics.pdf
Design Notes & Tips	https://www.st.com/resource/en/design_tip/dt0088-fir-filter-design-by-sampling-windowing-and-modulating-the-sinc-function-stmicroelectronics.pdf
Design Notes & Tips	https://www.st.com/resource/en/design_tip/dt0089-the-goertzel-algorithm-to-compute-individual-terms-of-the-discrete-fourier-transform-dft-stmicroelectronics.pdf
Design Notes & Tips	https://www.st.com/resource/en/design_tip/dt0091-lattice-wave-digital-filter-design-and-automatic-c-code-generation-stmicroelectronics.pdf
Design Notes & Tips	https://www.st.com/resource/en/design_tip/dt0092-lattice-wave-digital-filter-test-and-performance-verification-stmicroelectronics.pdf
Design Notes & Tips	https://www.st.com/resource/en/design_tip/dt0117-microphone-array-beamforming-in-the-pcm-and-pdm-domain-stmicroelectronics.pdf
Errata Sheets	https://www.st.com/resource/en/errata_sheet/es0250-stm32l471xx475xx476xx486xx-device-errata-stmicroelectronics.pdf
Datasheet	https://www.st.com/resource/en/datasheet/dm00108832.pdf
Programming Manuals	https://www.st.com/resource/en/programming_manual/pm0214-stm32-cortexm4-mcus-and-mpus-programming-manual-stmicroelectronics.pdf
Reference Manuals	https://www.st.com/resource/en/reference_manual/rm0351-stm32l47xxx-stm32l48xxx-stm32l49xxx-and-stm32l4axxx-advanced-armbased-32bit-mcus-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1163-description-of-wlcsp-for-microcontrollers-and-recommendations-for-its-use-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1204-tape-and-reel-shipping-media-for-stm32-microcontrollers-in-bga-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1205-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packages-stmicroelectronics.pdf

	stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1208-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssop-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1433-reference-device-marking-schematics-for-stm32-microcontrollers-and-microprocessors-stmicroelectronics.pdf
User Manuals	https://www.st.com/resource/en/user_manual/um2305-stm32l4-and-stm32l4-series-safety-manual-stmicroelectronics.pdf
User Manuals	https://www.st.com/resource/en/user_manual/um3166-stm32l4-and-stm32l4-series-ulcsaiec-607301603351-selftest-library-user-guide-stmicroelectronics.pdf