

Technical drawing of a rectangular plate with two circular holes. The plate has a width of 56.0 (28.0 pitch) and a height of 40.0. The two circular holes are labeled "hole saw 29" and are spaced 46.0 apart. The plate is surrounded by an "inner rib (inside)" and a "frame skirt from Z 100". The plate is mounted on a "plate outline 54 x 82 upright, gasket the same" which is "34.0 above the floor". The drawing also shows "rim, Z 109" and "floor fillet ends, Z 10".

inner rib (inside)

6 x 4.5 for M4, columns 46 apart, rows 28 apart

inner rib (inside)

46.0

56.0 (28.0 pitch)

40.0

hole saw 29

hole saw 29

plate outline 54 x 82 upright, gasket the same

34.0 above the floor


rim, Z 109

frame skirt from Z 100

floor fillet ends, Z 10

cavity floor, Z 0

Cut order: mark, drill the six 4.5 holes, hole-saw the two 29 holes from outside, deburr both faces, dry-fit the plate, then gasket. The floor fillet ends about 10 mm up; the plate starts at Z 13.

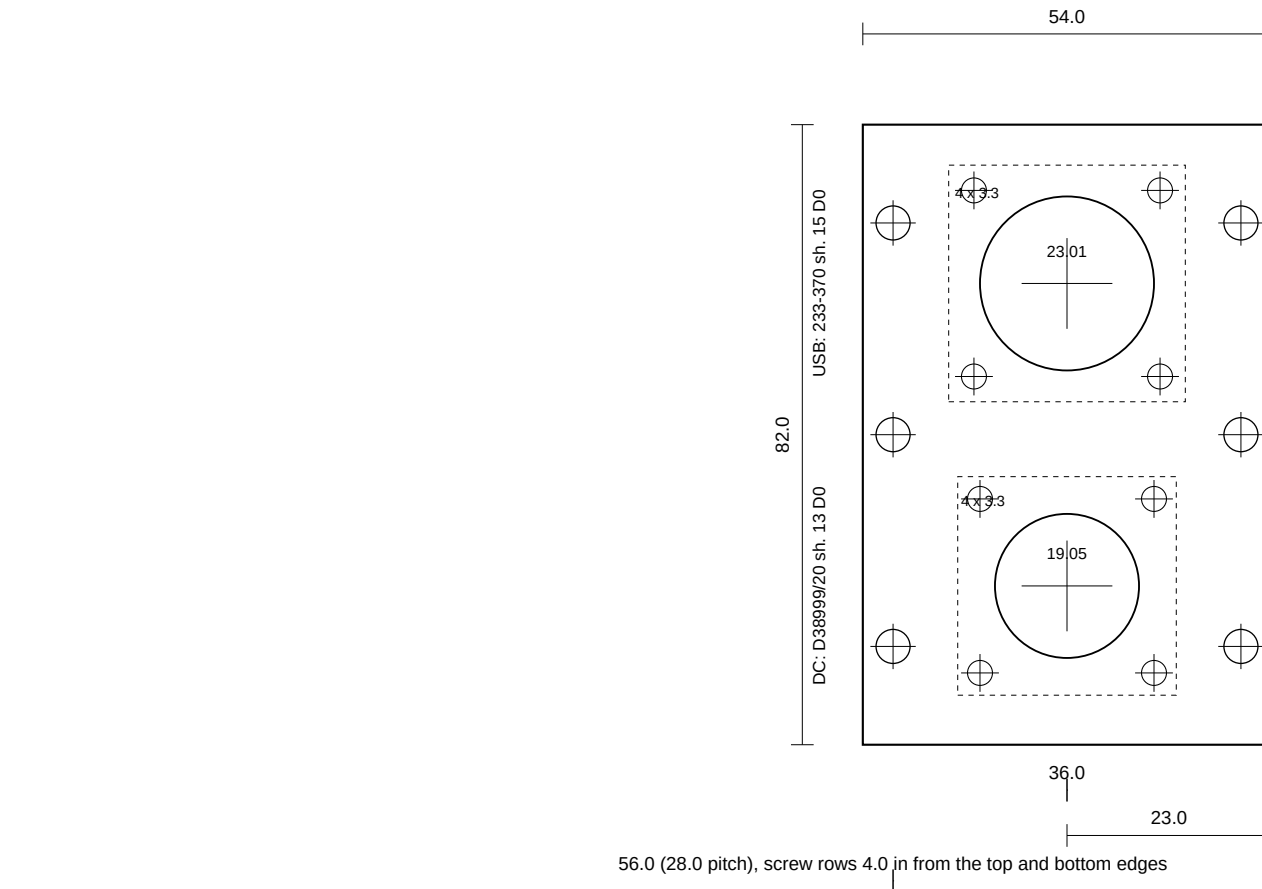

100 mm at 1:1 (print at 100 percent, no fit to page)
 SHEET 2 of 4: CONNECTOR PLATE, 54 wide x 82 tall x 3 mm aluminium (5052 or 6061), upright, shore DC below and USB above 40 mm apart, edges broken, seen from OUTSIDE the case. Gasket: 2 mm closed-cell neoprene or EPDM, same outline and holes, between plate and wall.


Shore DC: Glenair D38999/20 shell 13 wall mount with round holes (D0), front panel mount: hole 19.05, four M3 clearance holes on a 23.01 square, flange 28.9 square. Its own gasket seals to the plate.

USB host: Glenair 233-370 shell 15 wall mount D0, front panel mount: hole 23.01, four M3 clearance holes on a 24.61 square, flange 31.29 square; the 3 mm plate is inside its 1.6 to 6.35 mm panel range.

Both receptacles on a Glenair 930-001 silicone flange gasket (930-001S06 under the shell 13, 930-001S07 under the shell 15, 0.030 in thick; their hole patterns match the receptacles): flange outside, gasket, plate, then the receptacle's own nuts inside; M3 x 10 stainless with spring washers. Plate to wall: six M4 x 16 stainless with EPDM-bonded sealing washers under the outside heads, washers both sides, Nyloc nuts inside; torque 1.2 N m in a cross pattern so the gasket loads evenly.

Pin functions, cables and the dock leads: appendix 32.29 and ASSEMBLY.md section 4. Seen from outside the back wall (case +X to your left), as sheet 1. Nothing here has been cut yet.

WEST end wall (case -X), seen from outside: case +Y to your right

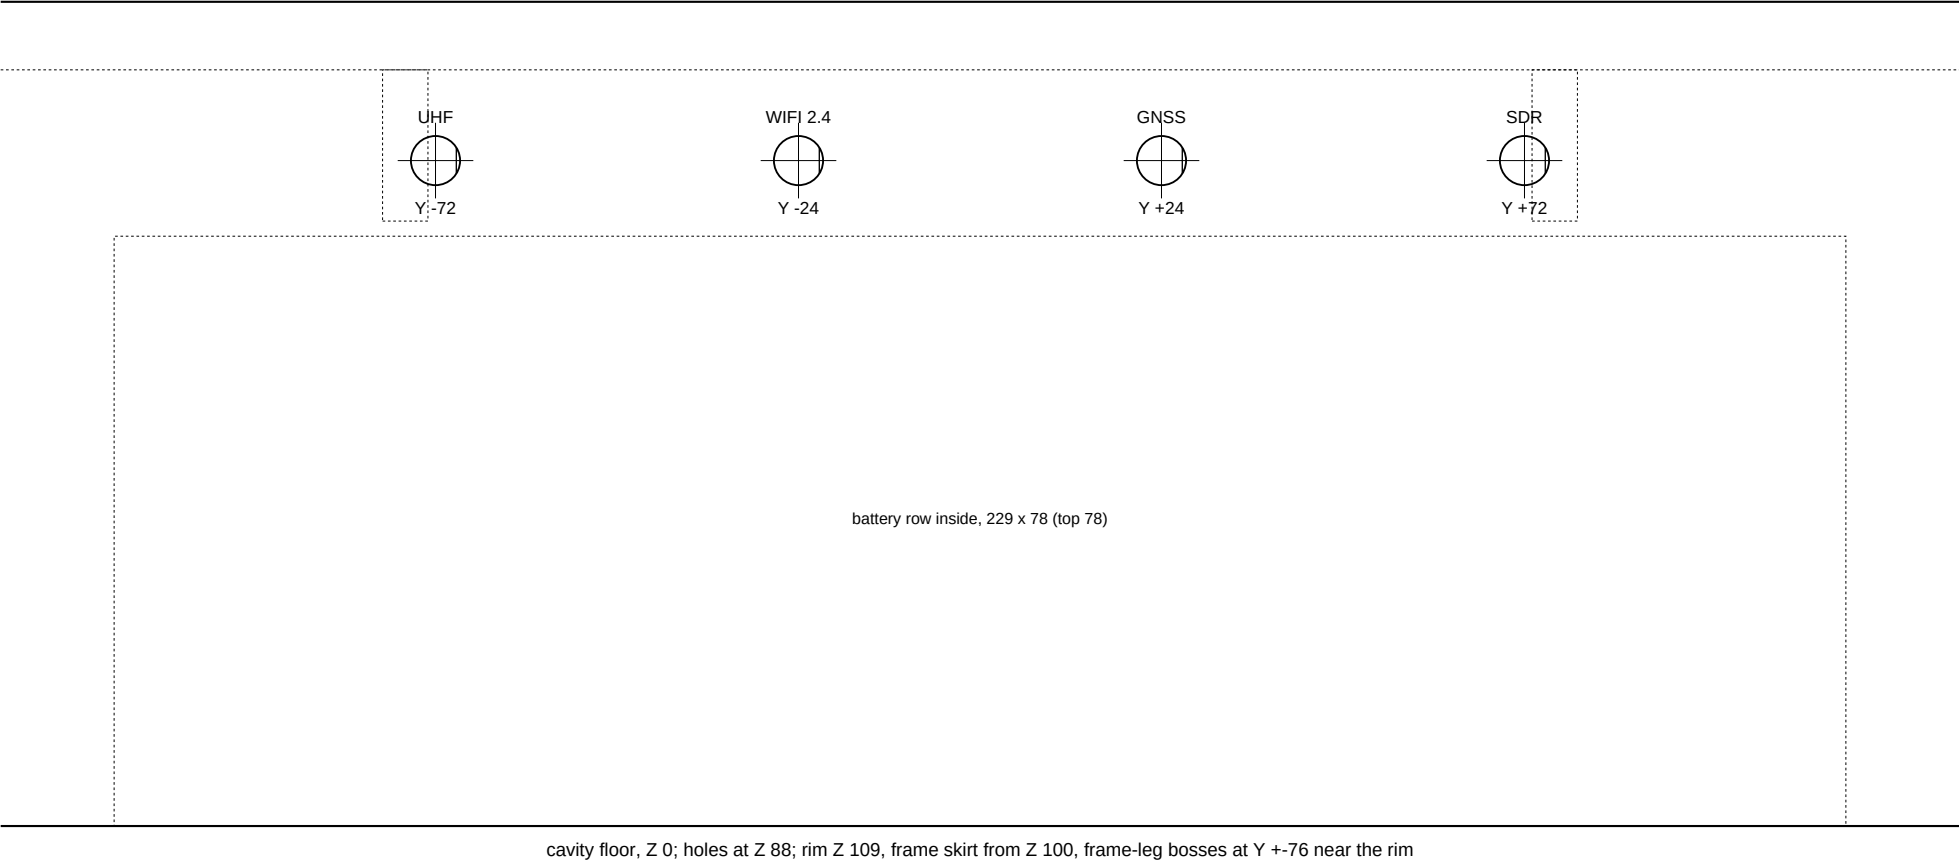

100 mm at 1:1 (print at 100 percent, no fit to page)

SHEET 3 of 4: the SMA antenna bulkheads on this end wall of the Peli 1450, 88 mm above the floor (32.40 item 8): west UHF, WIFI 2.4, GNSS, SDR at Y -72, -24, +24, +72; east LTE, IRIDIUM, LORA, WIFI P2P A, WIFI P2P B at Y -96, -48, 0, +48, +96. Print at 100 percent.

Coupler: Amphenol Connex 132170 SMA female-female bulkhead (vendor/rf), 6.5 mm D-hole with the flat filed to 6.00 across so the coupler cannot turn when a pigtail is torqued; 8 mm nut and lock washer inside, the NBR O-ring 6.5 x 1.0 under the outside hex.

The sites sit on the plain band of the end walls (ribs only at the corners, 1451-931) and above the battery row along the west wall (top 78 mm) with the frame skirt 12 mm above them. Inside, an RG-316 jumper runs from each coupler to its float nest on the strip: west wall to the UHF, WIFI 2.4, GNSS and SDR nests, east wall to LTE, IRIDIUM and LORA (about 150 to 250 mm each); the two WIFI P2P couplers take IPEX pigtails straight from the M.2 card on PCB-B, no nest.

Outside, the antenna pigtails screw on as before, 0.45 N m once. The retired wall strip E3 carried these same seven couplers; only their home changed.

EAST end wall (case +X), seen from outside: case +Y to your left

WIFI P2P B



Y +96

WIFI P2P A



Y +48

LORA



Y +0

IRIDIUM



Y -48

LTE



Y -96

cavity floor, Z 0; holes at Z 88; rim Z 109, frame skirt from Z 100, frame-leg bosses at Y +-76 near the rim

100 mm at 1:1 (print at 100 percent, no fit to page)

SHEET 4 of 4: the SMA antenna bulkheads on this end wall of the Peli 1450, 88 mm above the floor (32.40 item 8): west UHF, WIFI 2.4, GNSS, SDR at Y -72, -24, +24, +72; east LTE, IRIDIUM, LORA, WIFI P2P A, WIFI P2P B at Y -96, -48, 0, +48, +96. Print at 100 percent.

Coupler: Amphenol Connex 132170 SMA female-female bulkhead (vendor/rf), 6.5 mm D-hole with the flat filed to 6.00 across so the coupler cannot turn when a pigtail is torqued; 8 mm nut and lock washer inside, the NBR O-ring 6.5 x 1.0 under the outside hex.

The sites sit on the plain band of the end walls (ribs only at the corners, 1451-931) and above the battery row along the west wall (top 78 mm) with the frame skirt 12 mm above them. Inside, an RG-316 jumper runs from each coupler to its float nest on the strip: west wall to the UHF, WIFI 2.4, GNSS and SDR nests, east wall to LTE, IRIDIUM and LORA (about 150 to 250 mm each); the two WIFI P2P couplers take IPEX pigtails straight from the M.2 card on PCB-B, no nest.

Outside, the antenna pigtails screw on as before, 0.45 N m once. The retired wall strip E3 carried these same seven couplers; only their home changed.