


Technical drawing of a floor assembly cross-section. The drawing shows a central plate with two large circular holes, each labeled "hole saw 29". The plate is labeled "plate outline 54 x 82 upright, gasket the same". The plate is surrounded by a "rim, Z 109" and a "frame skirt from Z 100". The plate is supported by a "cavity floor, Z 0". The drawing includes dimensions: "56.0 (28.0 pitch)" for the vertical distance between the holes, "46.0" for the horizontal distance between the holes, "40.0" for the vertical distance from the holes to the bottom of the plate, and "34.0 above the floor" for the distance from the bottom of the plate to the floor. The drawing also includes labels for "inner rib (inside)" and "rim, Z 109".

Cut order: mark, drill the six 4.5 holes, hole-saw the two 29 holes from outside, deburr both faces, dry-fit the plate, then gasket. The floor fillet

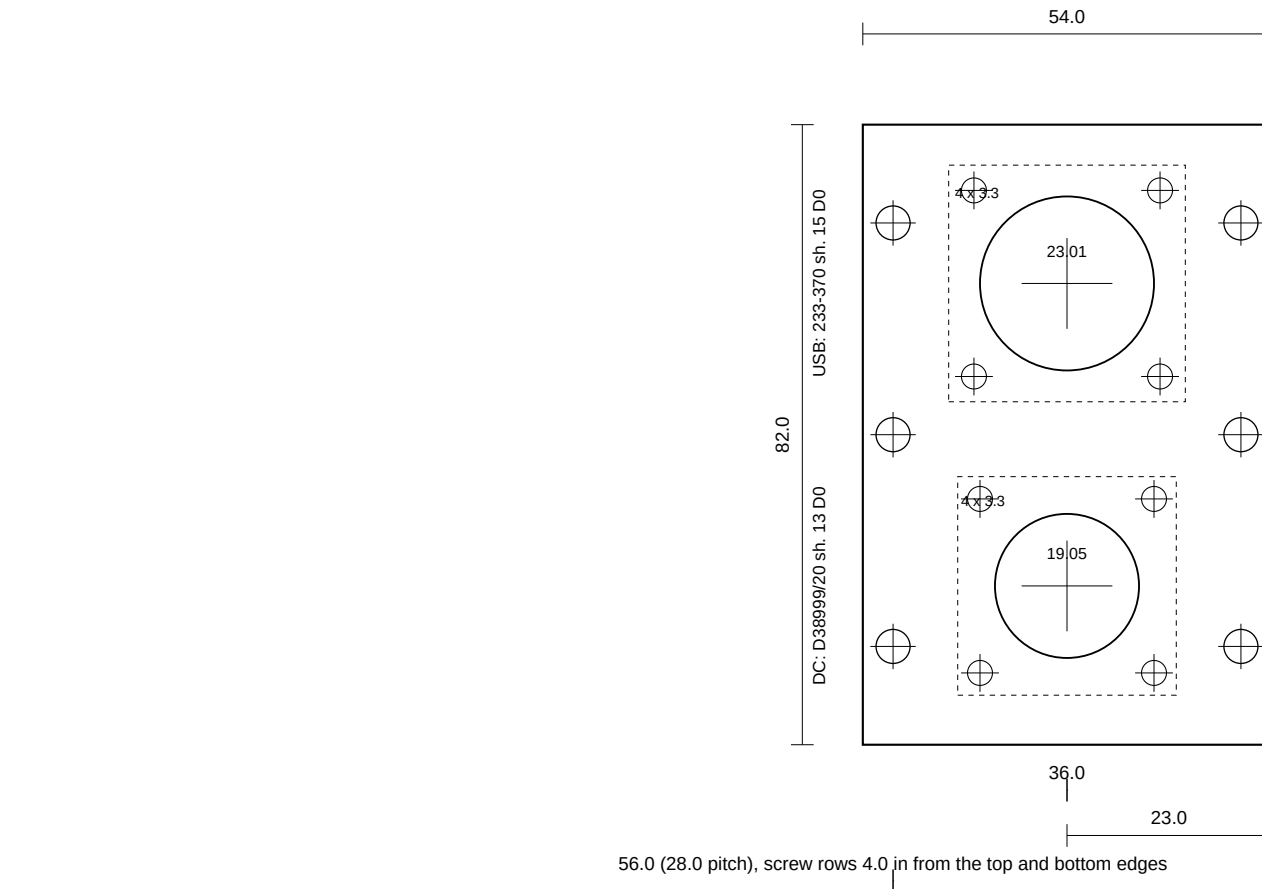

100 mm at 1:1 (print at 100 percent, no fit to page)
 SHEET 2 of 4: CONNECTOR PLATE, 54 wide x 82 tall x 3 mm aluminium (5052 or 6061), upright, shore DC below and USB above 40 mm apart, edges broken, seen from OUTSIDE the case. Gasket: 2 mm closed-cell neoprene or EPDM, same outline and holes, between plate and wall.

Shore DC: Glenair D38999/20 shell 13 wall mount with round holes (D0), front panel mount: hole 19.05, four M3 clearance holes on a 23.01 square, flange 28.9 square. Its own gasket seals to the plate.

USB host: Glenair 233-370 shell 15 wall mount D0, front panel mount: hole 23.01, four M3 clearance holes on a 24.61 square, flange 31.29 square; the 3 mm plate is inside its 1.6 to 6.35 mm panel range.

Both receptacles on a Glenair 930-001 silicone flange gasket (930-001S06 under the shell 13, 930-001S07 under the shell 15, 0.030 in thick; their hole patterns match the receptacles): flange outside, gasket, plate, then the receptacle's own nuts inside; M3 x 10 stainless with spring washers. Plate to wall: six M4 x 16 stainless with EPDM-bonded sealing washers under the outside heads, washers both sides, Nyloc nuts inside; torque 1.2 N m in a cross pattern so the gasket loads evenly.

Pin functions, cables and the dock leads: appendix 32.29 and ASSEMBLY.md section 4. Seen from outside the back wall (case +X to your left), as sheet 1. Nothing here has been cut yet.

WEST end wall (case -X), seen from outside: case +Y to your right



battery row inside, 229 x 78 (top 78)

cavity floor, Z 0; holes at Z 88; rim Z 109, frame skirt from Z 100, frame-leg bosses at Y +/-76 near the rim

100 mm at 1:1 (print at 100 percent, no fit to page)

SHEET 3 of 4: the SMA antenna bulkheads on this end wall of the Peli 1450, 88 mm above the floor (32.40 item 8): west VHF, WIFI 2.4, GNSS, SDR at Y -72, -24, +24, +72; east LTE, IRIDIUM, LORA, WIFI P2P A, WIFI P2P B at Y -96, -48, -24, +48, +96 (LORA off Y 0: the end wall carries a moulded nub at Y 0 and +83.5 on the jack line, 1451-931 side view). Print at 100 percent.

Coupler: Amphenol Connex 132170 SMA female-female bulkhead (vendor/rf), 6.5 mm D-hole with the flat filed to 6.00 across so the coupler cannot turn when a pigtail is torqued; 8 mm nut and lock washer inside, the NBR O-ring 6.5 x 1.0 under the outside hex.

The sites sit on the plain band of the end walls (ribs only at the corners, 1451-931) and above the battery row along the west wall (top 78 mm) with the frame skirt 12 mm above them. Inside, an RG-316 jumper runs from each coupler to its float nest on the strip: west wall to the UHF, WIFI 2.4, GNSS and SDR nests, east wall to LTE, IRIDIUM and LORA (about 150 to 250 mm each); the two WIFI P2P couplers take IPEX pigtails straight from the M.2 card on PCB-B, no nest.

Outside, the antenna pigtails screw on as before, 0.45 N m once. The retired wall strip E3 carried these same seven couplers; only their home changed.

EAST end wall (case +X), seen from outside: case +Y to your left

WIFI P2P B



Y +96

WIFI P2P A



Y +48

LORA



Y -24

IRIDIUM



Y -48

LTE



Y -96

cavity floor, Z 0; holes at Z 88; rim Z 109, frame skirt from Z 100, frame-leg bosses at Y +/-76 near the rim

100 mm at 1:1 (print at 100 percent, no fit to page)

SHEET 4 of 4: the SMA antenna bulkheads on this end wall of the Peli 1450, 88 mm above the floor (32.40 item 8): west VHF, WIFI 2.4, GNSS, SDR at Y -72, -24, +24, +72; east LTE, IRIDIUM, LORA, WIFI P2P A, WIFI P2P B at Y -96, -48, -24, +48, +96 (LORA off Y 0: the end wall carries a moulded nub at Y 0 and +83.5 on the jack line, 1451-931 side view). Print at 100 percent.

Coupler: Amphenol Connex 132170 SMA female-female bulkhead (vendor/rf), 6.5 mm D-hole with the flat filed to 6.00 across so the coupler cannot turn when a pigtail is torqued; 8 mm nut and lock washer inside, the NBR O-ring 6.5 x 1.0 under the outside hex.

The sites sit on the plain band of the end walls (ribs only at the corners, 1451-931) and above the battery row along the west wall (top 78 mm) with the frame skirt 12 mm above them. Inside, an RG-316 jumper runs from each coupler to its float nest on the strip: west wall to the UHF, WIFI 2.4, GNSS and SDR nests, east wall to LTE, IRIDIUM and LORA (about 150 to 250 mm each); the two WIFI P2P couplers take IPEX pigtails straight from the M.2 card on PCB-B, no nest.

Outside, the antenna pigtails screw on as before, 0.45 N m once. The retired wall strip E3 carried these same seven couplers; only their home changed.