


SEEN FROM OUTSIDE THE BACK WALL: case +X (east) on your LEFT. Solid: plate cut-outs (red: the pick is OPEN, cut-out PROVISIONAL); dashed: the wall hole under it; dotted: the part's flange or body on the plate face; small circles: M3 tapped (drill 2.5).

M14a OPEN (D's body top 81.5 inside, skirt above)

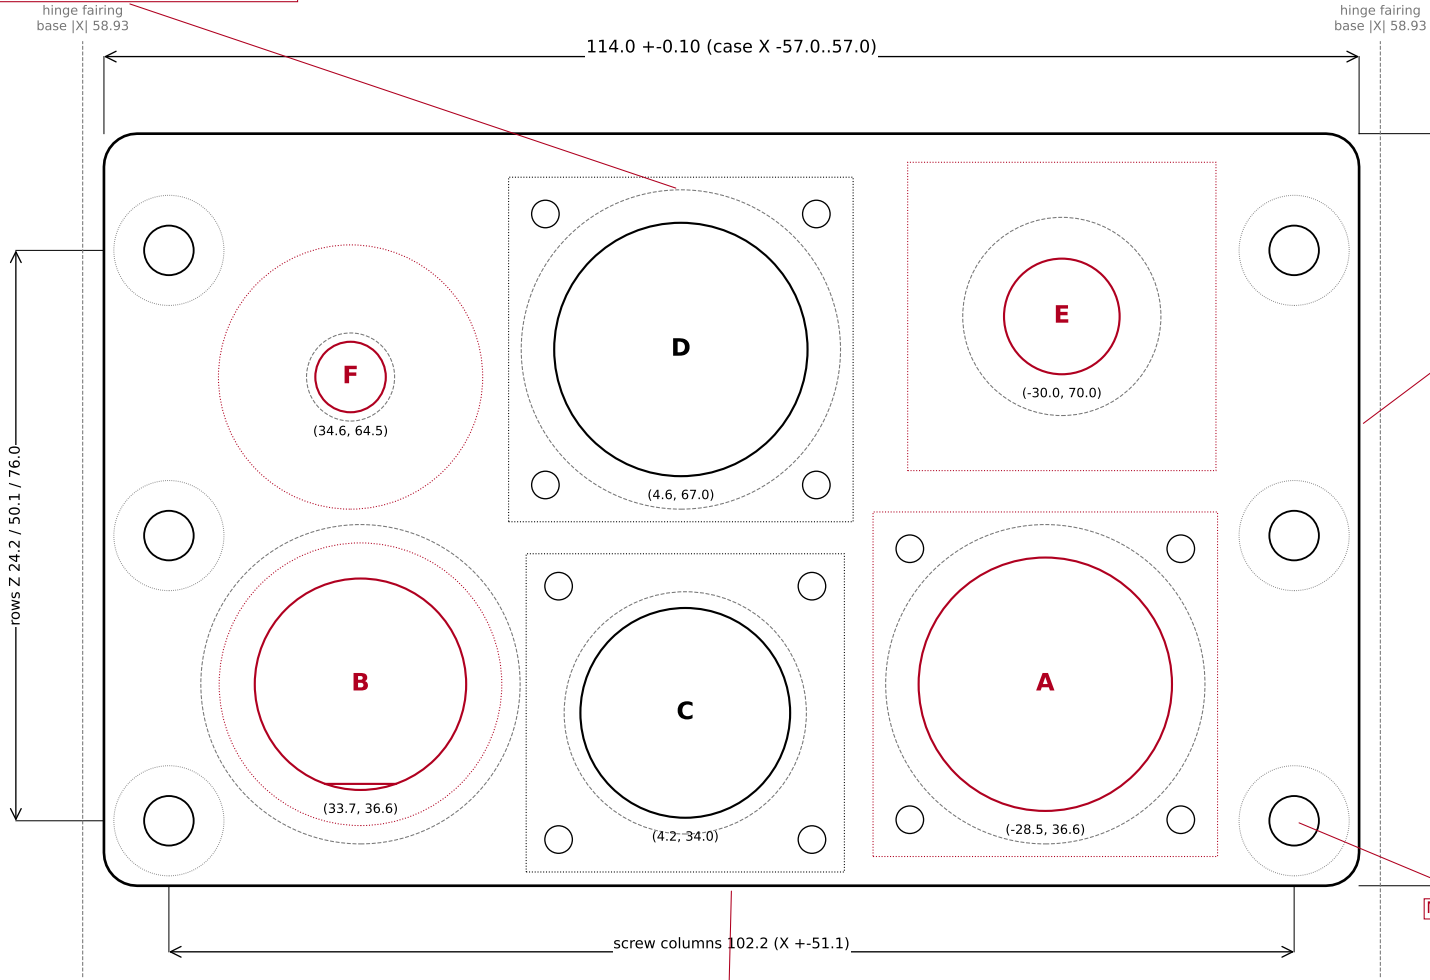

- ITEMS (panel1450.CONN_ITEMS; centre in case X, Z; plate cut-out / wall hole; flange screws)
- A (-28.5, 36.6) cut-out 23.01 wall 29 4 x M3 on 24.61 sq [OPEN]
sealed RJ45, PoE out: MIL-DTL-38999 shell 15 wall-mount class, 54 V or more (PICK OPEN: the PX0833 fails both)
 - C (+4.2, 34.0) cut-out 19.05 wall 22 4 x M3 on 23.01 sq [picked]
shore DC: Glenair D38999/20 shell 13 wall mount, round holes (D0)
 - B (+33.7, 36.6) cut-out 19.20 D, flat 9.05 to -Z wall 29 no flange screws [OPEN]
sealed USB-C 45 W outlet, power only: Bulgin 4000 series rear-panel class (PXP4043/C panel drawing OPEN)
 - E (-30.0, 70.0) cut-out 10.50 wall 18 no flange screws [OPEN]
outside sensor pod on its M8 receptacle (binder 86 6618 1121 00004 recommended, sheet not held)
 - D (+4.6, 67.0) cut-out 23.01 wall 29 4 x M3 on 24.61 sq [picked]
USB host (console, key fill): Glenair 233-370 shell 15 (D0)
 - F (+34.6, 64.5) cut-out 6.40 wall 8 no flange screws [OPEN]
ground stud, M6 class: the external earth lead and both RF entry plates' leads outside, the one bonding strap inside

PLATE: 5052-H32 or 6061-T6 aluminium, 5.0, 5.0 thick, R 3.0 corners, edges broken; M4 x 25 A2, a bonded sealing washer 10 across under the head, a plain washer 9.0 and a Nyloc inside.
GASKET: 2.0 closed-cell EPDM or neoprene, the plate's outline, holes = the wall holes (connector-plate-gasket.dxf).
Flanges of A, C and D on Glenair 930-001 flange gaskets (0.76), M3 x 10 A2 into the plate's threads; nothing stands proud of the back.
WALL (1:1 template, back-wall sheet): hole saws 29 (A, B, D), 22 (C), 18 (E), drill 8 (F) and six 4.5; marked +-0.3 (INFERRED).
STACK THROUGH THE WALL: flange gasket 0.76 + plate 5.0 + gasket 2.0 (1.5 compressed) + wall 5.34 (DXF A-A).
INSIDE: A's patch plug under B16 and U51 and outboard of A22 (M14e, M14f); B's lead bent down at R 28 (M14g, M14h); C's cores turned down within 12 (M14d); D's right-angle USB-A plug, cable down, within 20.0 (M14c); F's bonding strap to A's ground.
OPEN PICKS (section 6 of CASE-MARGINS.md): the sealed RJ45 (a shell 15 envelope rated 54 V: the Bulgin PX0833 fails both), the PXP4043/C panel drawing, the M8 receptacle's sheet, the pod and the stud. Until each is picked its cut-out stays PROVISIONAL.

Margin rows this sheet's features enter (frame_seat.out): key, verdict, min, nominal, worst, worst with unstated x2

M14a	OPEN	1.00	+4.50	+2.58	+0.76	highest part inside the back wall below the frame skirt (D's body; the top screws' washers reach 80.5)
M14b	OPEN	1.00	+2.40	+1.34	+0.28	connector plate bottom edge above the outer bottom radius
M14i	OPEN	1.00	+1.93	+1.15	+0.47	connector plate edge to the hinge fairings' bases in X
M14j	MET	1.00	+1.81	+1.13	+1.13	tightest pair on the plate face (flanges, pod, stud, screw washers), each at its float: A / D
M14k	MET	1.00	+1.85	+1.11	+1.11	tightest pair of mated connectors (shell 15 plugs 32.51, shell 13 plug 29.4), each at its float: D / F
M14l	MET	2.00	+4.11	+3.51	+2.91	tightest wall web between two holes (screw holes included)
M14m	OPEN	3.00	+3.65	+3.05	+2.45	tightest gasket band from a wall hole to the plate edge (screw holes included)
M14n	MET	1.00	+27.69	+26.61	+25.93	nearest bearing face inside to the X 0 rib (if this wall carries it)
M14o	MET	1.00	+11.31	+10.25	+9.19	connector plate top below the outer rim flange
M14p	MET	0.00	+0.90	+0.47	+0.47	screw washers (bonded, 10 across) fully on the plate (edge distance)
M14c	MET	1.00	+8.75	+5.93	+3.22	D: right-angle (down) USB-A plug body, <= 20.0 from the 233-370 rear face, to B16's edge
M14d	MET	1.00	+22.30	+20.06	+17.92	C: shore DC cores (turned down within 12 of the rear) to B16's edge
M14e	MET	1.00	+2.80	+1.73	+1.43	A: patch plug (straight or right-angle, +-8) under B16 and U51
M14f	MET	1.00	+7.69	+4.87	+2.16	A: patch plug end (<= 40.0 from the rear face) outboard of A22's edge
M14g	MET	1.00	+7.30	+6.17	+5.87	B: USB-C lead (7.0, bent at R 28 into the case) under B16 and U51
M14h	MET	1.00	+19.94	+17.70	+15.56	B: the lead's innermost point outboard of A22's edge

TOLERANCES AND STATUS

Dimensions in mm. Kit parts (this sheet): machined positions and outlines +-0.10; the 3.0 face plate +-0.13 and the 6.0 entry plates +-0.20 (EN 485-4 class, standard not held, INFERRED); the setting leg's pad height +-0.10; rebate depth and line +-0.10; spot-face floors +-0.10.
Peli: the 1450PF sheet 1453-314-000 rev A states +-0.76 on one-decimal and +-0.25 on two-decimal mm (VERIFIED); drawing 1451-931 states no tolerance ("typical industry-standard tolerances apply"), so every case allowance is the session's (INFERRED, UNSTATED).
Design basis only (v2/docs/CASE-MARGINS.md section 1, Verdicts): a MET row still meets its minimum with every unstated allowance taken twice, a sensitivity reading and not a bound on those allowances; an OPEN row rests on something no held source gives. Nominal CAD establishes no fit, seal or alignment; checks T1 to T11 (CASE-MARGINS.md section 5) do. Prototype: nothing on this sheet has been made, bought or fitted.
Each part floats on its fixings (A's and D's flanges 0.24 on M3, C's 0.29, B's body 0.30, E's 0.33, F's 0.30, each M4 0.33); M14j and M14k carry those floats and two machined places per pair.

MeshSat field kit V2, Peli 1450 case set

Connector plate on the back wall (C3): six ruled items, gasket and wall holes

MESH SAT-1357. PROTOTYPE DESIGN: nothing made, bought or fitted.
Session choices under the owner's standing rule of 26 Sep 2026 (SC-07).

Source: tree a8652172 plus the case release's changes (fnd/hc7); inputs by sha256 (first 12):
3bdb88df9826 v2/ecad/tools/panel1450.py
214e915b9855 v2/vendor/peli/1450/frame_seat.out
4c6047173e4a v2/cad/connector_plate.py

Generated 2026-09-27 by v2/cad/case_drawings.py (sheet 3) from the files named left; regenerate with v2/cad/README.md. The editable sources govern; this sheet is a copy.

Sheet 3 of 14

A3, mm
not to scale for measurement:
dimensions govern; use the
1:1 templates for marking