



Lag Processor

Audio Signal Modification Unit
User Manual And Technical Reference

ACOUSTIC RESEARCH



In this our 20th year of operation, and on behalf of the entire company; I would personally like to express my deepest gratitude for your continued support of our products and services.

Here at Acoustic Research, we pride ourselves in the quality of our instruments and ensure that every one meets the high standards that our customers deserve. I have no doubt, that the equipment that you have received today will meet those standards just as they did 20 years ago.

I wish you the greatest success in your research

James Chaffinch
James Chaffinch, CEO

References in this publication to Acoustic Research products, programs, or services do not imply that Acoustic Research intends to make these available in all countries in which Acoustic Research operates. Any reference to an Acoustic Research product, program or service is not intended to state or imply that only Acoustic Research's product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any of Acoustic Research's intellectual property rights or other legally protectable rights may be used instead of the Acoustic Research product, program, or service. Evaluation and verification of operation in conjunction with other products, programs, or services, except those expressly designated by Acoustic Research, are the user's responsibility.

Acoustic Research may have patents or pending patent applications covering subject matter in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to an Acoustic Research authorized dealer or your Acoustic Research marketing representative, who will be able to forward on the request.

The following terms in this publication are trademarks of Acoustic Research Inc. In the European Union and/or other countries / economic areas.

- Acoustic Research
- Lag Processor

This publication could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Acoustic Research may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time.

It is possible that this publication may contain reference to, or information about, Acoustic Research products (machines and programs), programming, or services that are not announced in your country. Such references or information must not be construed to mean that Acoustic Research intends to announce such Acoustic Research products, programming, or services in your country.

Requests for technical information about Acoustic Research products or services for those products, whether they be repair, maintenance or upgrade; should be made to your Acoustic Research authorized dealer or your Acoustic Research marketing representative.

This product's connections follow the Coordinated Universal Interworking Standard (C UIS) and as such can be used with any other product from any manufacturer that also adheres to this standard.

Contents

Description	1
An Example	1
The Bouncing Artifact	3
Interface	5
Unit Specifications	7

Description


The Lag Processor unit is an audio signal modification device which implements a simple averaging computation over a series of received values - or samples - producing this averaged value as the audio signal output.

As samples are received by the input connection, they are placed in an internal digital storage unit. The number of samples stored is defined as the “Samples To Average” value, which can be defined externally, between 1 and 100. For every new sample that is received, the oldest value in the memory is removed, resulting in the memory always containing the most recently received samples. In addition, after this sample is added to the memory; the system will produce an output sample generated by summing all the samples in the memory, then dividing that summation value by the number of samples in the memory.

The resulting effect is to reduce the efficacy of high-frequency or rarely occurring values. Adjusting the “Samples To Average” value causes this filtering effect to become more or less powerful, as it spans more or less values in time.


An Example

Below we can see a waveform made of two notable waveforms added together; one of low frequency and one of high frequency. Using the Lag Processor, it is possible to extract the low frequency wave.

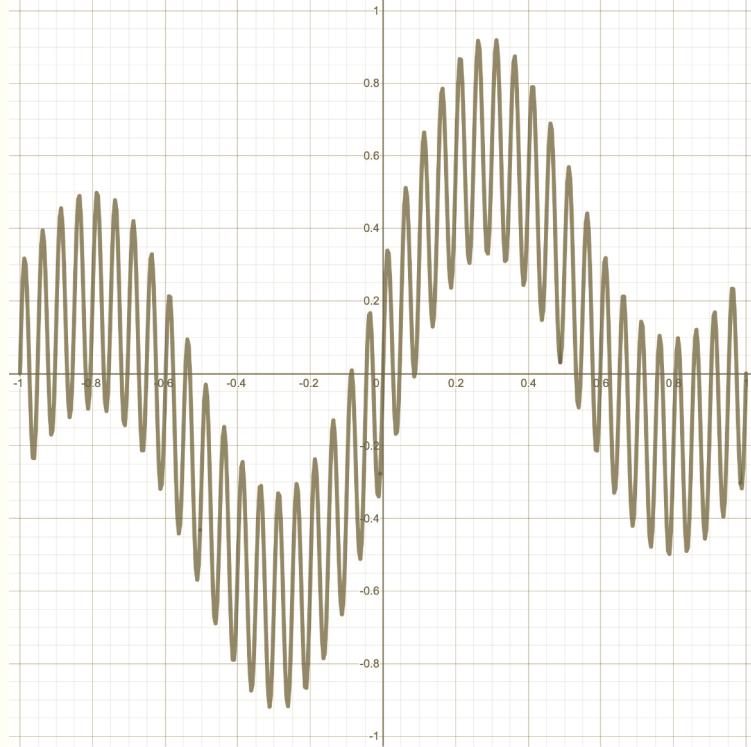


Original Waveform

By adjusting the number of samples that are averaged, we are able to remove the high-frequency waveform. Note how the averaging process adds an amount of delay to the signal, proportional to the number of samples to be averaged.

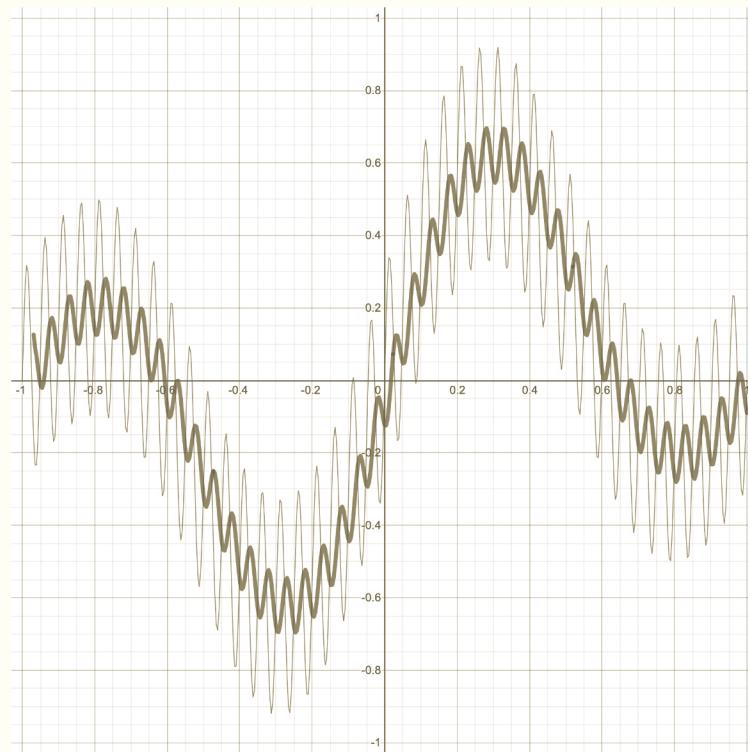

Samples To Average: 10

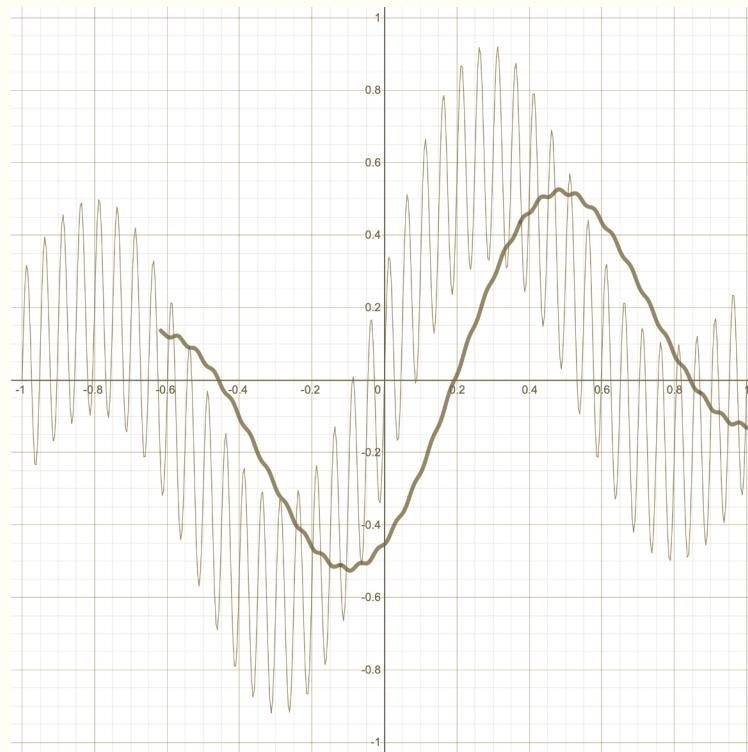

Samples To Average: 100

The Bouncing Artifact

Unlike a typical low-pass filter, the Lag Processor produces a distinct “bouncing ball” frequency response. Below we can see that effect over a range of 1000hz to 4000hz. The low points on these graphs are the harmonic frequencies of the Lag Processor for these settings of the “Samples To Average”.




Samples To Average: 10



Samples To Average: 20



Samples To Average: 30

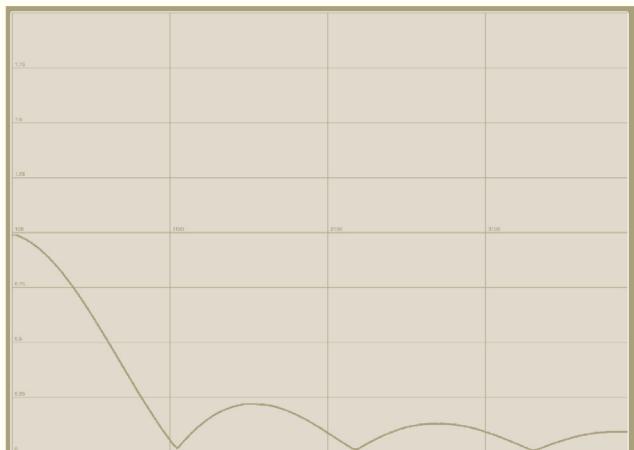

Samples To Average: 40



Samples To Average: 50

The effect is produced when the frequency of the waveform, aligns with both the number of samples which are being averaged, and the duration between when samples are taken.

In other words, when the incoming frequency is a rate at which one complete wave of this waveform takes up the same number of samples as are being averaged by the Lag Processor, the result will be zero. This continues for whole multiples of that frequency.

We can calculate the frequencies that these zero-points are reached with a simple formula. We first know that the device has a sample rate of 44100 samples a second. Dividing this by the number of samples the device is averaging returns the frequency of the primary zero-point.

For example, when averaging 10 samples; $44100 / 10 = 4410\text{hz}$. Subsequent zero-points are whole multiples of this value; 8820hz, 13230hz, 17640hz, etc.

Interface

1. Audio Signal Input

The audio signal input connection

CUIS type: Orange

2. Audio Signal Output

The audio signal output connection

CUIS type: Orange


3. Samples To Average Value Dial

Used for selecting the Samples To Average value


4. Voltage Samples To Average Value Control

A voltage control input connection port which directly modifies the Samples To Average Value Dial (3). Control is between the values of 0 and 1.

CUIS type: Green

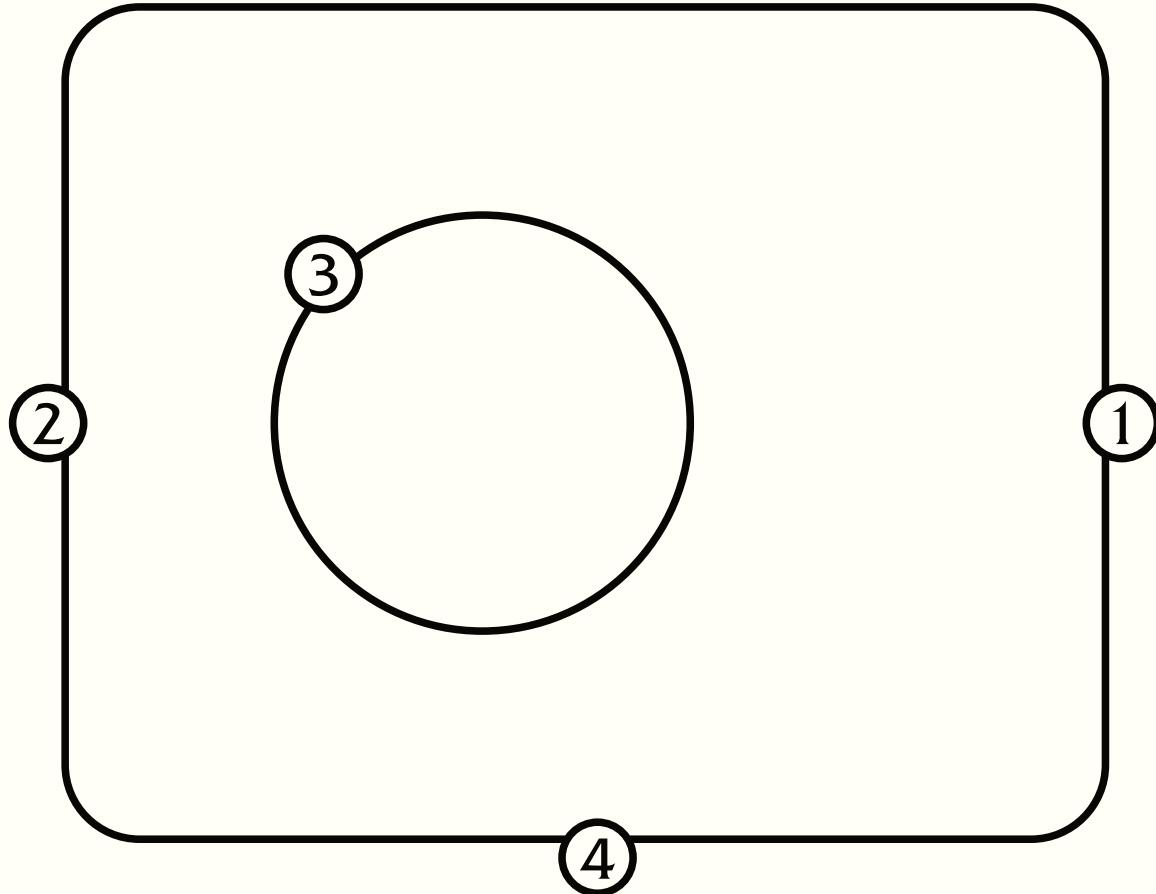

Unit Specifications

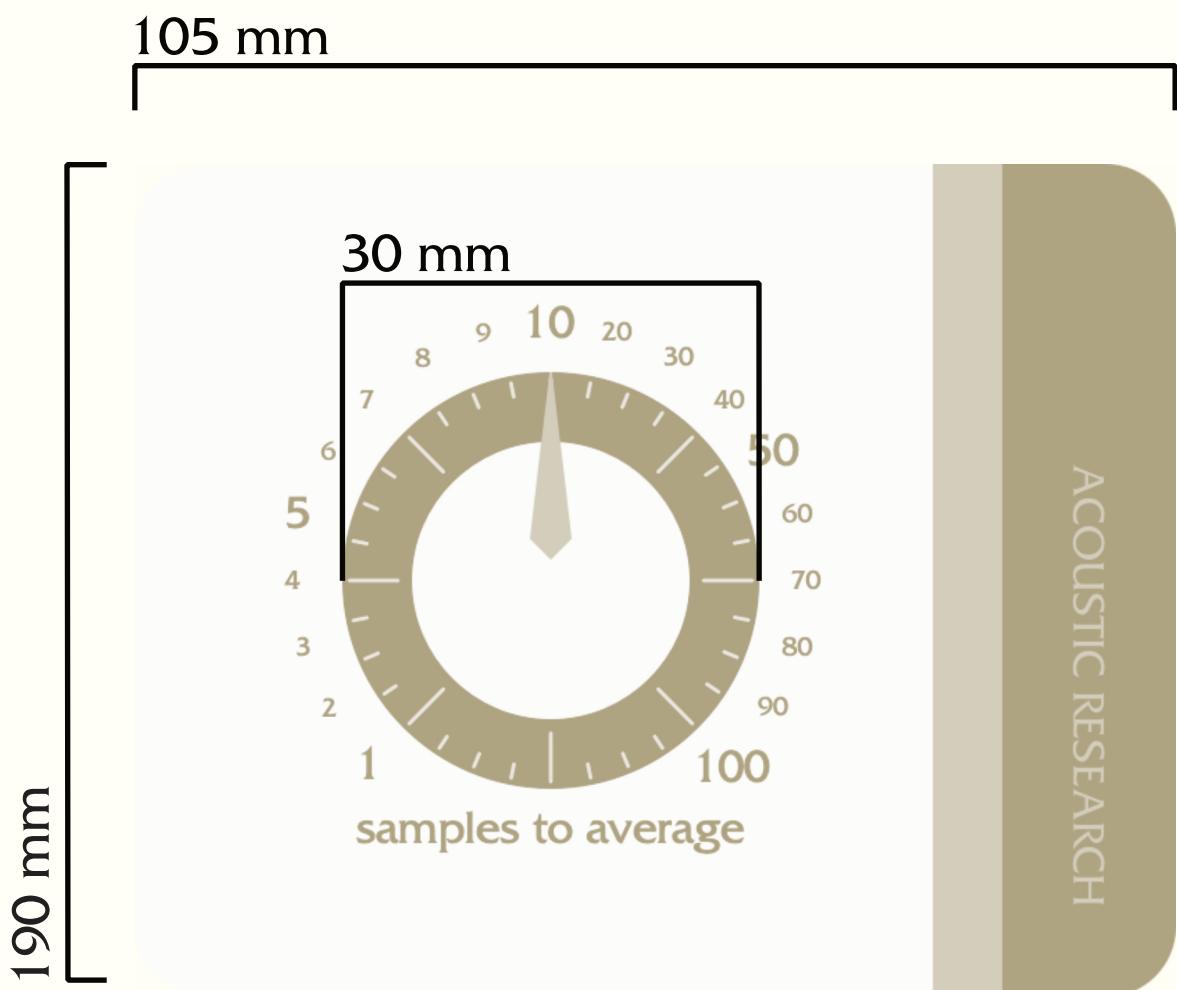

© Copyright Acoustic Research Inc. 1981. All rights reserved