


Erica Synths Black Joystick 2

Joystick Patches


Audio
Control Voltage
Trigger / Gate

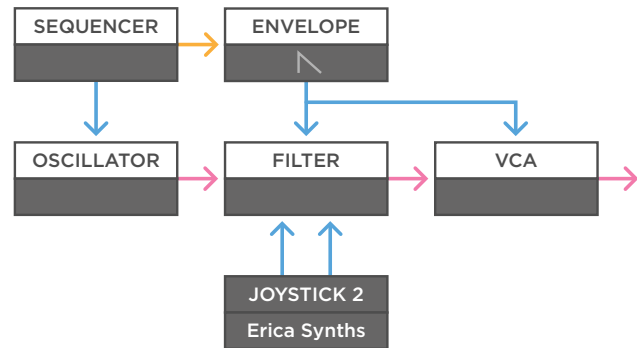

(a)

a - You can use the joystick to get control over a synth voice. For example, patch up a basic oscillator, filter, and VCA patch, with a sequencer to create a melody, and trigger an envelope to the filter. Now, you can send the X and Y outputs of a single channel of the Black Joystick 2 to control both the cutoff frequency and resonance of that filter.

MONOTRAIL TECH TALK

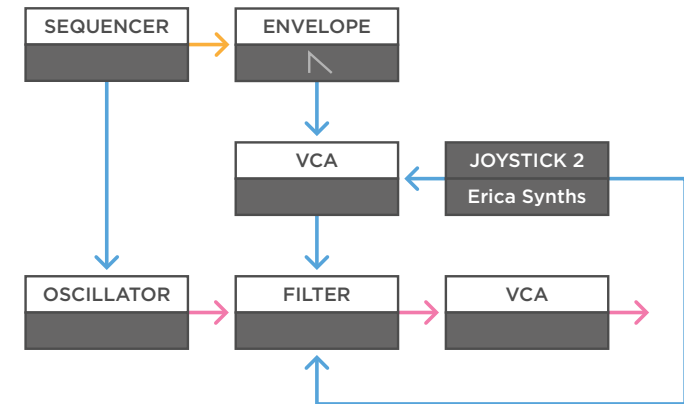

(b)


b - You can vary as much as you like within a patch like this, and control any aspect you want. For example, you can send the X output to the filter, and have the Y output open a VCA between the envelope and filter, to control the envelope amount.

Erica Synths Black Joystick 2

Joystick Patches

MONOTRAIL TECH TALK

- Audio
- Control Voltage
- Trigger / Gate

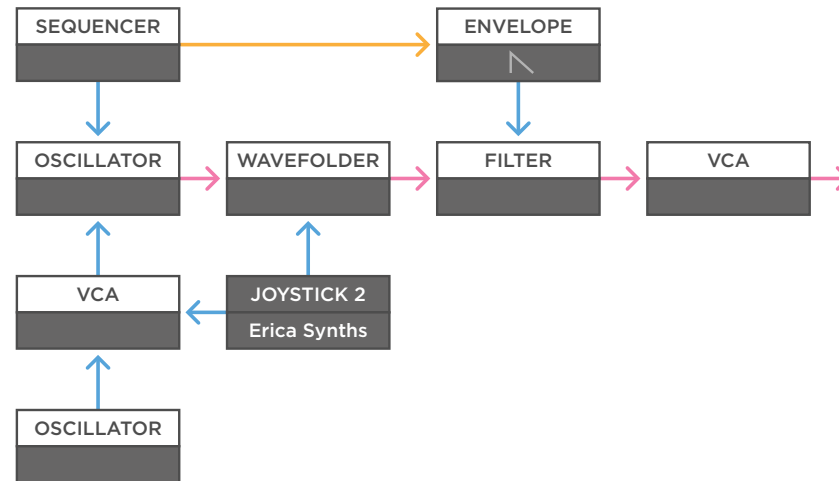


(a)

a - Or, if you set up a patch with two oscillators and a wavefolder, have the joystick control the amount of frequency modulation from one oscillator to the other, as well as the folding amount on the wavefolder.

Erica Synths Black Joystick 2

Joystick Patches

- Audio
- Control Voltage
- Trigger / Gate

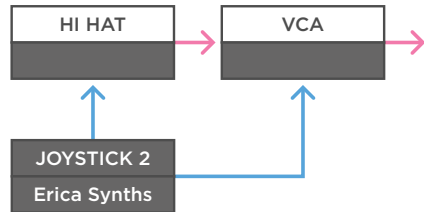


(a)

a - It's also easy to get hands-on control over other things like percussive sounds. If you use a simple hats module through a VCA, you can have the joystick control both the volume and decay of the hats for example. Remember you can always record a motion to add some looping dynamics.

MONOTRAIL

TECH TALK

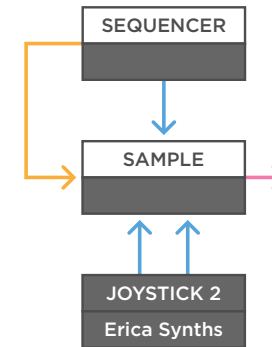

(b)


b - Here, a sample player with multiple drum hits, and a sequencer, are used to create drum loops. Now, you can take the joystick and send the X and Y outputs to control the decay and pitch of the samples, to create nice hands-on dynamics over the drums.

Erica Synths Black Joystick 2

Joystick Patches

- Audio
- Control Voltage
- Trigger / Gate

MONOTRAIL TECH TALK

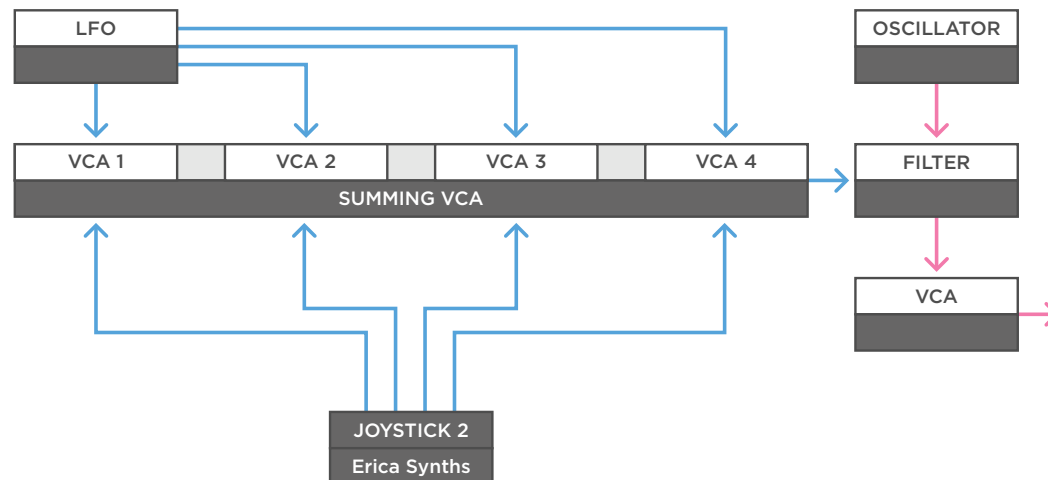

(a)


With two channels of the Black Joystick 2 in SNEW mode, it's easy to control a series of VCAs. For example, you can feed four different waveforms of a single oscillator to a summing VCA, with all the channels closed. Now if you feed the four outputs of the joystick to those VCAs, you create manual wave morphing between the four shapes.

a - In this example you see that same concept, but with an LFO. Here, four different waveforms of an LFO are fed into a four-channel summing VCA, and the result of that is sent to a filter in a simple synth voice. Now you can manually morph between the different modulation shapes.

Erica Synths Black Joystick 2

Sine Patches


Audio
Control Voltage
Trigger / Gate

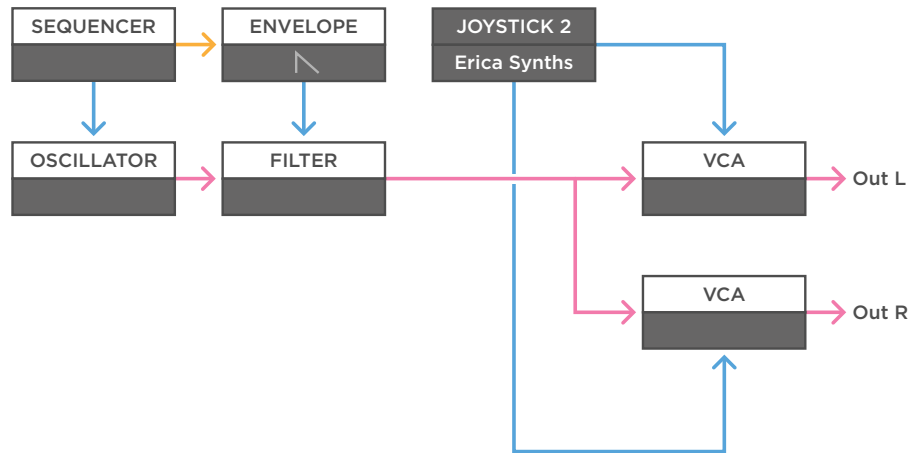

(a)

a - The sine wave generator on the Black Joystick 2 can be useful in many patches. For example, you can set up the simple melodic voice we used earlier, but now multiply the output of the filter to two VCAs to create a stereo signal. Then, you can use the regular sine, and the inverted sine output of a single channel, to control each of those VCAs, in order to create movement in the stereo field.

MONOTRAIL TECH TALK

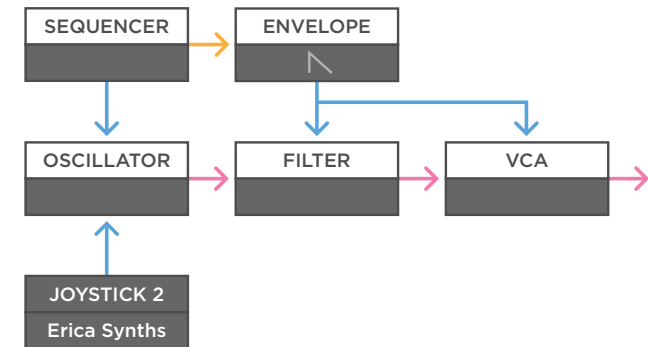


(b)

b - Sine waves at audio rates are great to add texture to a patch. For example, within this simple voice, used in a slightly more percussive way, you can send an audio rate sine wave directly to the linear FM input on the oscillator. Because you can control both the frequency and the amplitude of the signal coming out of the Black Joystick 2, you don't need another VCA to control the amount of frequency modulation.

Erica Synths Black Joystick 2

Noise Patches


Audio
Control Voltage
Trigger / Gate

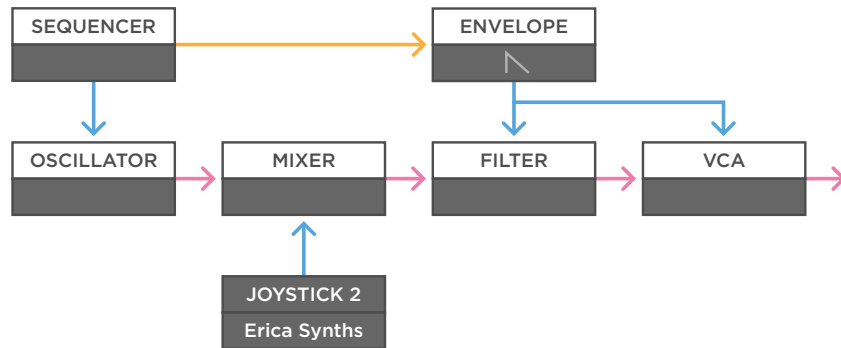

(a)

a - Adding noise to a synth voice is a classic trick. Just use an oscillator, mixer, filter, VCA setup, and add a simple sequencer and envelope to the patch. Now you can use the Black Joystick 2 to add noise to the mixer. And because you can record the frequency and amplitude of the noise, you can easily make a static patch more dynamic.

MONOTRAIL TECH TALK

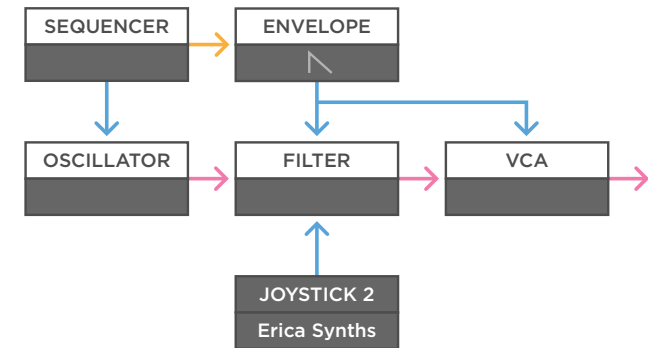

(b)


b - Random voltages also work great as a modulation source, in order to add texture and grit to your sound. For example, just send some audio rate noise to modulate the filter in a simple voice. It can really lead to nice results if you add some motion to the frequency and amplitude of the noise signal.

Erica Synths Black Joystick 2

Combined Patches

MONOTRAIL TECH TALK

- Audio
- Control Voltage
- Trigger / Gate

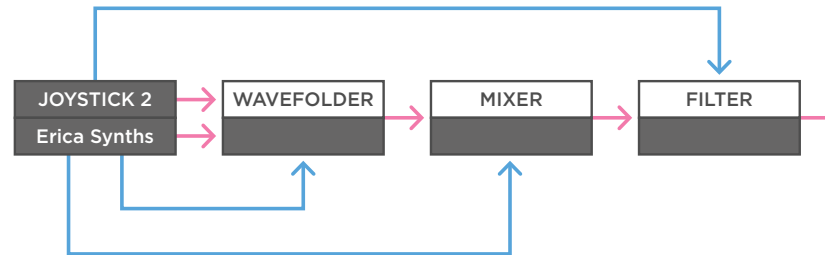

(a)

a - However, the true strength of the Black Joystick 2, lies in combining its channels with different modes. For example, you can use the Black Joystick 2 as both the audio and modulation source in a drone voice. You can send the output of two audio rate sine wave channels to a wavefolder. One channel with a static frequency, and one with some recorded motion, so its frequency is slowly drifting.

Then send the output to a mixer, and mix in some noise from the third channel on the Black Joystick 2. Now, send the output of the mixer to a filter, and use the last channel of the Black Joystick 2 to control both the filter and wavefolder, to add manual control over the drone.

MONOTRAIL TECH TALK



And finally, send a few multiplications of a regular and inverted sine wave from a fourth channel to different places in your patch, to add some movement. Now, by just cycling through the four channels and using the joystick, you can create entire performances.