


QUAD LOPASS GATE - MODEL 292t

OUTPUTS

All - Can use this output as a 4 to 1 (mono) audio mixer

A,B,C,D - Individual audio outputs. Can be used as a quadraphonic distribution mixer

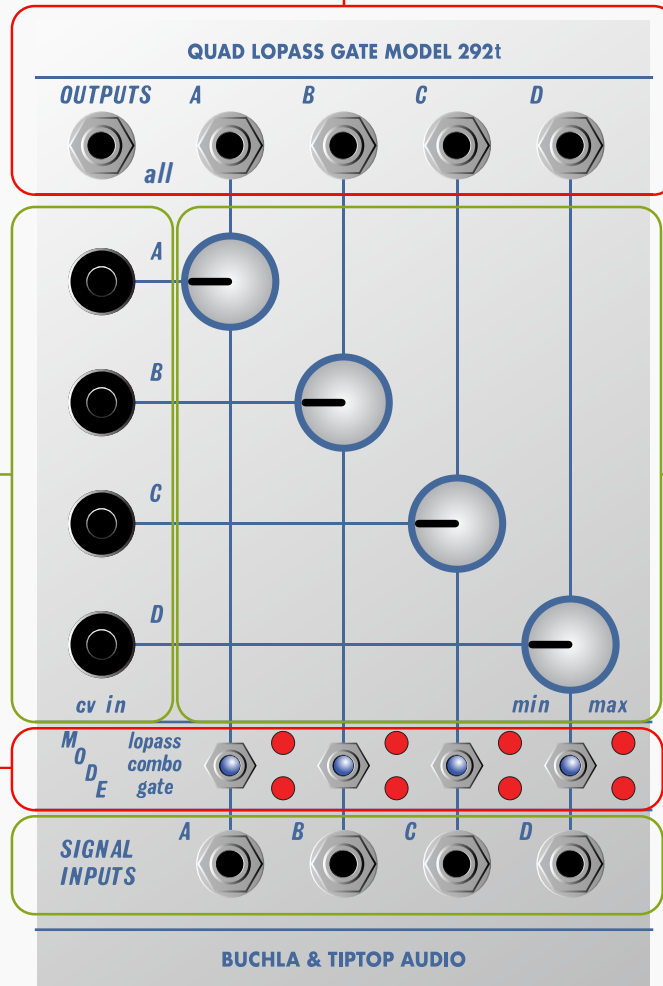

CV INPUTS

A,B,C,D - Control Voltage inputs for each audio channel

BLUE KNOBS

These are manual volume/offsets for each channel

BLUE SWITCHES

These select among 3 different modes:

Gate - A linear VCA (LED lit)

Combo - A combination of the linear gate and the lopass filter mode. It adds a subtle ringing decay to the audio (No LED, both LEDs not lit)

LoPass - A LoPass filter. Gives that "snap" when pinging it. (LED lit)

INPUTS

A,B,C,D - Individual audio inputs

* Note:

Explore using the the **257t** to attenuate the an envelope going into the **292t** for a wider variety of timbres and responses

Size: 16 HP - Depth: 45mm

Power (vactrol version): +12V 87mA / -12V 36mA

Power (RHS version): +12V 91mA / -12V 85mA

Buchla **TIPTOP**audio

Eurorack 200 series