

# Electrical Engineering 102, Homework 4

Michael Wu  
UID: 404751542

November 8th, 2018

## Problem 1

a) The real component will contain the sine term and the imaginary component will not have a negative sign and contain the cosine term. Thus we have the following.

$$\Re(c_k) = -\Re(c_{-k})$$

$$\Im(c_k) = \Im(c_{-k})$$

$$c_k^* = -c_{-k}$$

$$|c_k| = |c_{-k}|$$

$$\angle c_k = \pi - \angle c_{-k}$$

b)

$$x(t) = 1 + 4 \cos(2\pi t)$$

We can deduce this result by first noting that the frequency is 1 Hz, giving us  $\omega = 2\pi$ . Next since the DC component is 1, there must be a constant 1 added. So in the Fourier series expansion of  $x(t)$  we have  $c_0 = 1$ . Also, the other term must be a cosine since the signal is even and there is only one positive frequency component. Finally from Parseval's theorem, we know that the total power is 9, so there must be coefficients  $c_{-1}^2 + c_0^2 + c_1^2 = 9$ . We can make the cosine term and satisfy this equation by letting  $c_1 = c_{-1} = 2$ , which corresponds to the term  $4 \cos(2\pi t)$ .

c) Assume that  $T > b - a$ . Then the Fourier transform is an integral from  $a$  to  $b$ , since the function is zero everywhere else. Similarly, the Fourier series coefficients are integrals over one period, which is the same as  $a$  to  $b$  since the function is zero everywhere else within the period. Thus we have that

$$c_k = \frac{1}{T} Y \left( jk \frac{2\pi}{T} \right)$$

## Problem 2

a)

1. a, d, e
2. f
3. c, e
4. a, b
5. e
6. f
7. d
8. b

b)

1. This is true. Convolution in the time domain corresponds to multiplication in the frequency domain. Thus the Fourier transform of the convolution must be an even and real function multiplied by an imaginary and odd function. This yields an odd and imaginary function, and taking the inverse Fourier transform of this would result in a real and odd function. Hence, convolution of a real and even signal and a real and odd signal is a real and odd signal.

2. This is true. Let our signal be  $x(t)$  and let its Fourier transform be  $F(x(t)) = X(j\omega)$ . From time scaling we know that  $F(x(-t)) = X(-j\omega)$ . Then we have

$$F(x(t) * x(-t)) = X(j\omega)X(-j\omega)$$

which produces an even function. An even Fourier transform corresponds to an even input signal, thus we know that  $x(t) * x(-t)$  is even.

c)

1. If  $x(t) = x^*(-t)$ , we know that  $\mathbb{R}(x(t)) = \mathbb{R}(x(-t))$  and  $\mathbb{I}(x(t)) = -\mathbb{I}(x(-t))$ . So the real component of  $x(t)$  is even and the imaginary component of  $x(t)$  is odd. The Fourier transform of the real component is a real and even signal, while the Fourier transform of the imaginary component is a real and odd signal. From the linearity of the Fourier transform, we can add these two components together and get the Fourier transform for  $x(t)$ . Thus  $X(j\omega)$  must be real because its components are real.
2. We know that  $X(j\omega) = X_e(j\omega) + X_o(j\omega)$ . Additionally,  $X_e(j\omega)$  must be real and even since  $x(t)$  is real.  $X_o(j\omega)$  must be imaginary and odd since  $x(t)$  is real. Therefore we know that the entirety of the real component of  $X(j\omega)$  comes from  $X_e(j\omega)$ , so

$$X_e(j\omega) = \mathbb{R}(X(j\omega))$$

and the entirety of the imaginary component of  $X(j\omega)$  comes from  $X_o(j\omega)$ , so

$$X_o(j\omega) = j\mathbb{R}(X(j\omega))$$

### Problem 3

a) We know that  $X(j\omega)$  is real and even. Furthermore, the integral  $\int_{-\infty}^{\infty} X(j\omega) d\omega$  is  $2\pi$  times the inverse Fourier transform of  $X(j\omega)$  at  $t = 0$ . As  $x(0) = 1$ , we get  $2\pi$  when evaluating the inverse Fourier transform. Since the given integral is over the positive side of the domain and the Fourier transform is even, we obtain a final result of  $\pi$ .

b) This is the integral  $\int_{-\infty}^{\infty} x(t) dt$ . Looking at the area under  $x(t)$ , this evaluates to 5.


c) The Fourier transform is real and even. Thus  $\angle X(j\omega) = 0$ .

d) This is  $2\pi$  times the inverse Fourier transform of  $X(j\omega)$  evaluated at  $t = -1$ . Because  $x(-1) = 1$ , this integral is  $2\pi$ .

e) Rewriting the expression yields

$$\begin{aligned} F^{-1}(\Re(e^{-j3\omega} X(j\omega))) &= F^{-1}(\cos(-3\omega) X(j\omega)) \\ &= F^{-1}\left(\frac{e^{-j3\omega} + e^{j3\omega}}{2} X(j\omega)\right) \\ &= \frac{1}{2}x(t-3) + \frac{1}{2}x(t+3) \end{aligned}$$

which looks like the plot below.

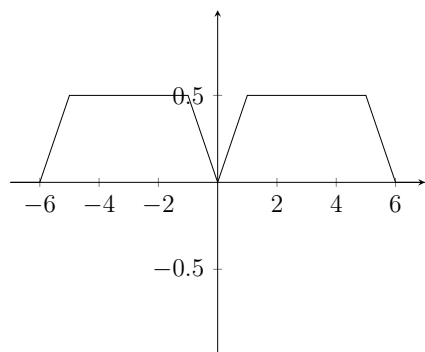

## Problem 4

a)

1. 1
2. 2
3. 3
4. 4

**b)**

**c)**

1. 1

2. 2