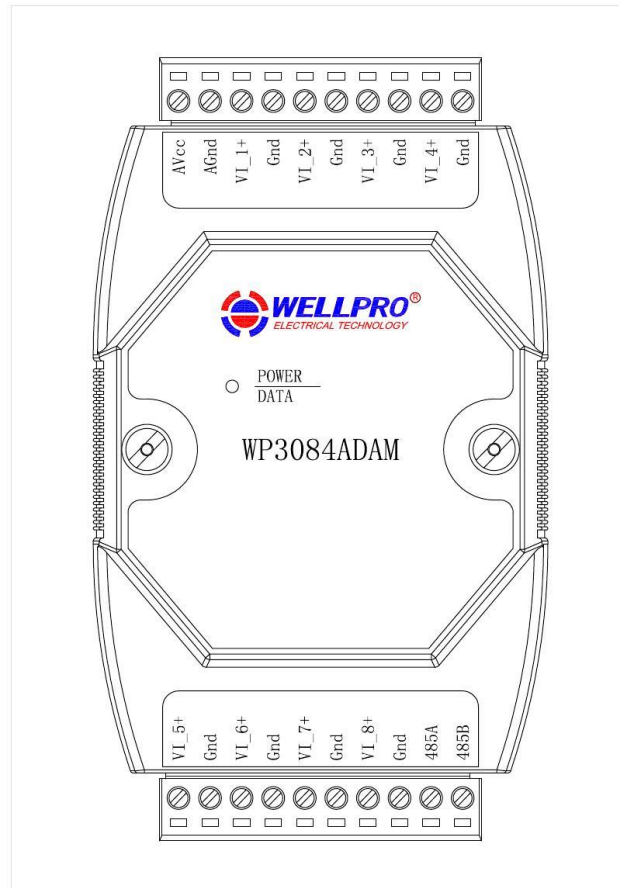# WP3084ADAM

User's Manual

Version 1.42A

Shanghai Wellpro Electrical Technology Co., Ltd.
www.shwellpro.com

1、Product description

- **Eight voltage input channel: DC0~10V**
- **RS485 MODBUS RTU standard communication protocol**
- **Netted with configuration software, PLC or industry touch panel**
- **Communication status LED**
- **Communication circuit designed for thunder protection and interference immunity**
- **Used for signal collection and control in industrial field**

2、Specification

- **Analog input channel**   **8ch**
- **Analog input range**   **DC0~10V**
- **Analog input accuracy**   **±0.02V**
- **Working temperature**   **-20~70°C**
- **External power supply**   **DC9V~30V/2W**
- **Isolation protection**   **DC1500V**
- **Installation method**   **Standard DIN slide rail or screw**
- **Dimension**   **125×73×35mm**

3、Interface description

AVcc	**External power supply input positive**
AGnd	**External power supply input negative / Power ground**
VI_1+	**Voltage input channel 1 positive**
Gnd	**Voltage input channel negative / Common analog ground**
VI_2+	**Voltage input channel 2 positive**
Gnd	**Voltage input channel negative / Common analog ground**
VI_3+	**Voltage input channel 3 positive**
Gnd	**Voltage input channel negative / Common analog ground**
VI_4+	**Voltage input channel 4 positive**
Gnd	**Voltage input channel negative / Common analog ground**
VI_5+	**Voltage input channel 5 positive**
Gnd	**Voltage input channel negative / Common analog ground**
VI_6+	**Voltage input channel 6 positive**
Gnd	**Voltage input channel negative / Common analog ground**
VI_7+	**Voltage input channel 7 positive**
Gnd	**Voltage input channel negative / Common analog ground**
VI_8+	**Voltage input channel 8 positive**
Gnd	**Voltage input channel negative / Common analog ground**
485B	**RS485 signal B-**
485A	**RS485 signal A+**

4、Analog input application diagram
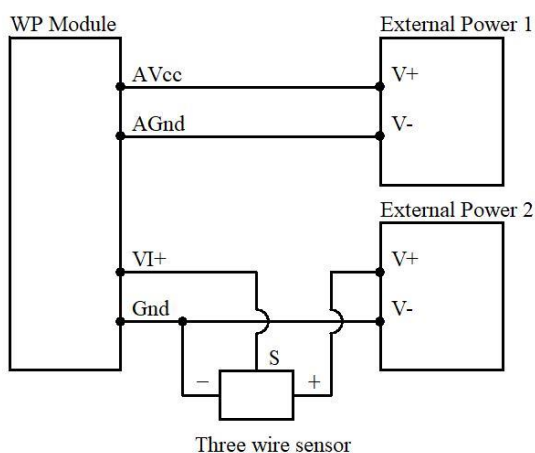
5、Communication description

5.1、Communication parameter: 9600, None, 8, 1 (default setting)

Parameter	Description
9600	**baud rate**
None	**check bit**
8	**data bit**
1	**stop bit**

5.2、Command for analog input data reading

Send: 01 03 00 00 00 08 44 0C （example/hex）

data	byte	data description	remark
01	**1**	**module address**	**address range:01-FE**
03	**1**	**function code**	**03-read holding register**
0000	**2**	**register address (4X type)**	**0000-starting register address**
0008	**2**	**register number**	**0008-read 8 registers**
440C	**2**	**CRC check code**	**CRC check code for all data**

Receive: 01 03 10 05 AF 00 00 00 00 00 00 00 00 00 00 00 00 00 00 C8 76 （example/hex）

data	byte	data description	remark
01	**1**	**module address**	**address range:01-FE**
03	**1**	**function code**	**03-read holding register**
10	**1**	**byte of data**	**10-read 16 bytes**
05AF	**16**	**read data**	**05AF-analog input channel 1 data**
0000			**0000-analog input channel 2 data**
0000			**0000-analog input channel 3 data**
0000			**0000-analog input channel 4 data**
0000			**0000-analog input channel 5 data**
0000			**0000-analog input channel 6 data**
0000			**0000-analog input channel 7 data**
0000			**0000-analog input channel 8 data**
C876	**2**	**CRC check code**	**CRC check code for all data**

This command reads module's voltage input data.
The data of the analog input channel 1 is "05AF", it will be 1455 after converting to decimal data. Put it in the formula:
$V=DATA*10/4095=1455*10/4095\approx3.55V$. The voltage of other analog input channel is 0V.

5.3、Command for module address setting

Send：00 06 00 64 00 01 08 04 （example/hex）

date	byte	data description	remark
00	**1**	**module address**	**00-broadcast address**
06	**1**	**function code**	**06-write single holding register**
0064	**2**	**register address (4X type)**	**0064-module address register**
0001	**2**	**write data**	**0001- module address, range:0001-00FE**
0804	**2**	**CRC check code**	**CRC check code for all data**

Receive：00 06 00 64 00 01 08 04 （example/hex）

This command sets module address (slave address) as "01" (default setting). This setting could be saved when power off.
This is a broadcast command. It needs to ensure that only one module is connected to the master.
When module receives correct command, it will send response back to the master.

5.4、Command for communication parameter setting

Send：01 06 00 65 00 02 18 14 （example/hex）

data	byte	data description	remark
01	1	module address	address range:01-FE
06	1	function code	06-write single holding register
0065	2	register address (4X type)	0065-communication parameter register
0002	2	write data	0001- 4800, None, 8, 1 0002- 9600, None, 8, 1 0003- 19200, None, 8, 1 0004- 38400, None, 8, 1 0005- 4800, Even, 8, 1 0006- 9600, Even, 8, 1 0007- 19200, Even, 8, 1 0008- 38400, Even, 8, 1
1814	2	CRC check code	CRC check code for all data

Receive：01 06 00 65 00 02 18 14 （example/hex）

This command sets communication parameter as "9600, None, 8, 1" (default setting). This setting could be saved when power off.
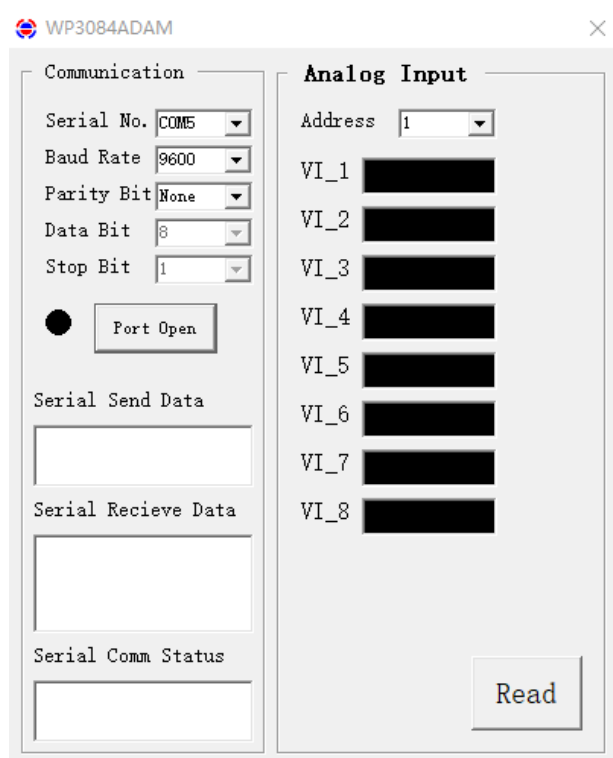When module receives correct command, it will send response back to the master.

6、POWER/DATA LED description
- When module powered on, LED is green.
- When module is under communication, LED is twinkling.
- When module receives correct command, LED is green.
- When module receives incorrect command or other module's command, LED is red.

7、PC debugging description
We provide a debugging software for function testing and parameter setting. Please follow the steps below:
- Connect computer to module with RS485 converter.
- Connect DC12V or DC24V power to module and power on. To avoid any unnecessary damage, please make sure the power positive and negative terminals are correctly connected before power on.
- Open the software and select the model of module, you will see the window of function testing or parameter setting.
- Set communication parameter and open the serial port.
- Select corresponding setting and click "Read" or "Write" button.

8、RS485 network diagram