

TABLE OF CONTENTS


TABLE OF CONTENTS	1
1- REMOVAL OF FAILED MEMORY BOARD	2
2- BOARD SETUP	4
3- INSTALLATION OF REPLACEMENT BOARD	8
4- FUNCTIONAL CHECKS REQUIRED	8
REVISION HISTORY	9

This procedure applies to 1.5T and 1.0T systems.

Description - Procedure for replacing the VME I/F Board.


1- REMOVAL OF FAILED MEMORY BOARD

1. Remove front cover from System Cabinet.
2. Turn off the Mmin circuit breaker, CB1 (see Illustration L4601A).

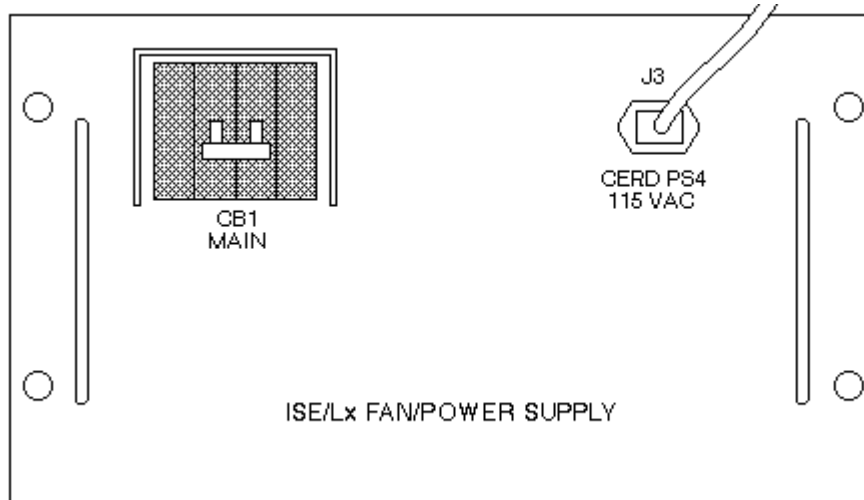


ISE FAN/POWER ASSEMBLY - FRONT VIEW
ILLUSTRATION L4601A

3. Remove two screws from VME I/F Board (MR2 A30 A1) and slide out of chassis (see Illustration L4729A).

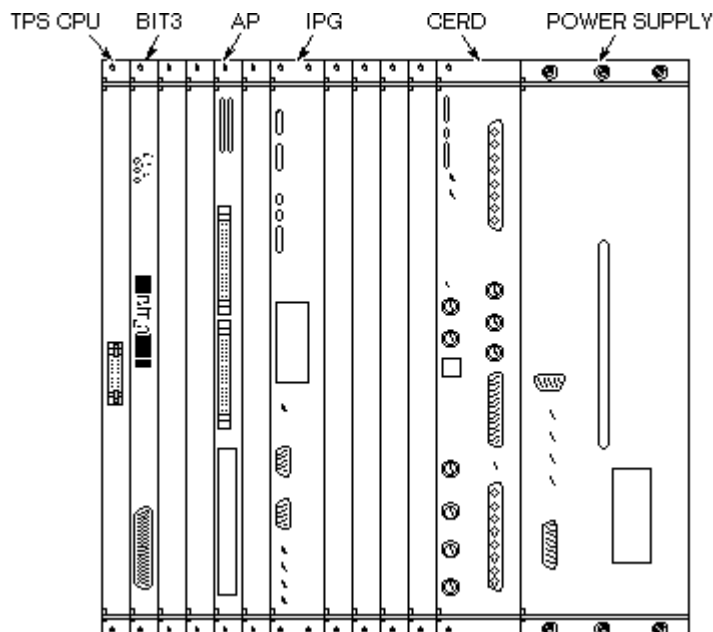


ISE CHASSIS - FRONT VIEW
ILLUSTRATION L4729A

See Illustration L2449D for VME I/F Board.

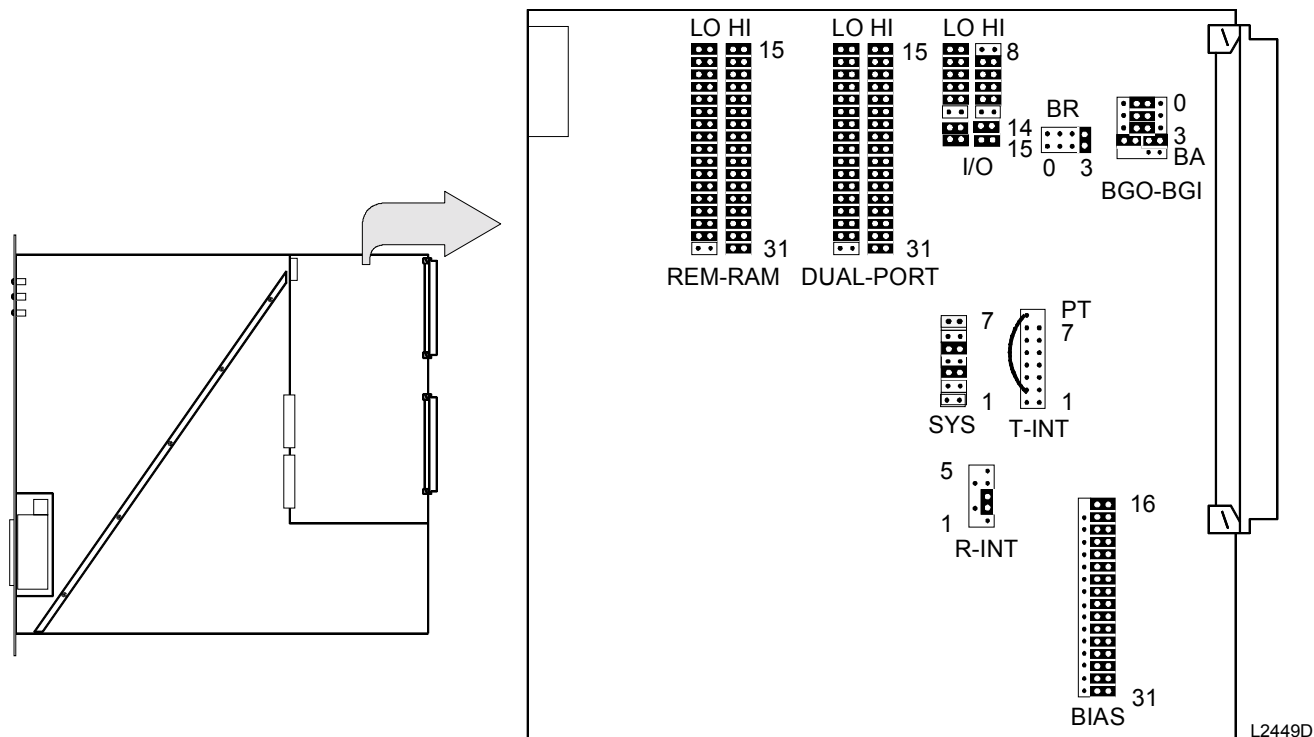

TPS/ISE VME INTERFACE BOARD JUMPER POSITIONS
ILLUSTRATION L2449D

Systems with an Advanced Development Workstation (ADWS) require a second Bit 3 board. Refer to Illustration L2449C for the jumper positions for this board.

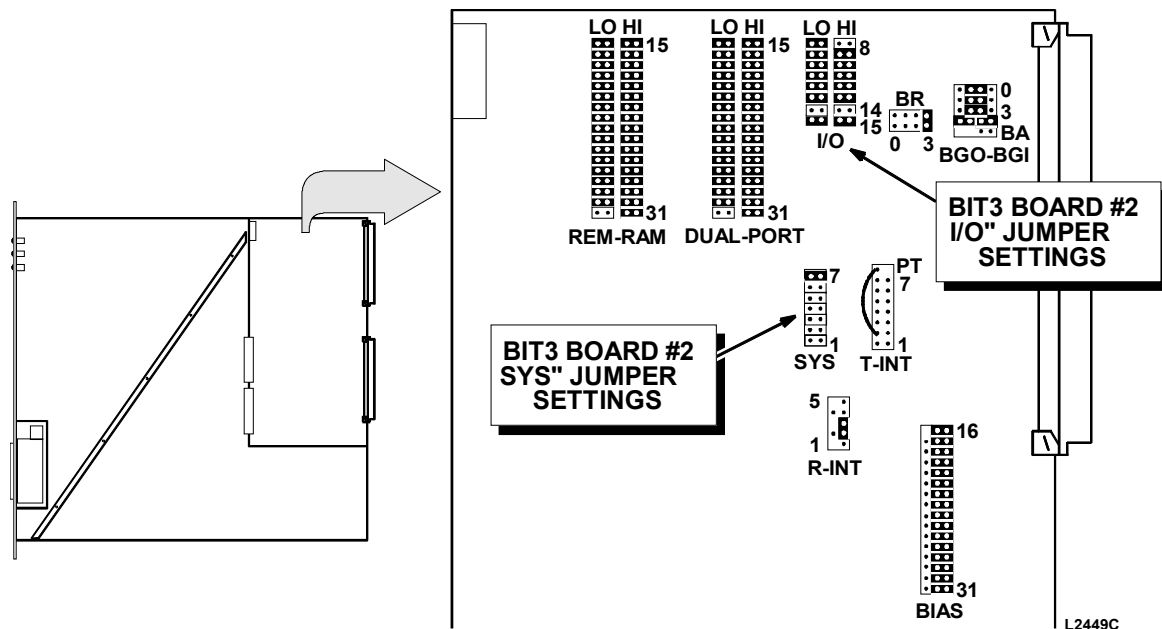

VME INTERFACE #2 JUMPER POSITIONS (CARDIAC ADVANCED DEVELOPMENT WORKSTATION)
ILLUSTRATION L2449C

2- BOARD SETUP

Note

Before installing board, verify jumpers are in the correct position.

See Table 1 for Jumper Information. See Table 2 for systems with an ADWS that require a second board.

TABLE 1
JUMPER INFORMATION

Jumper	Position	Jumper	Position
BIAS-16	2-3	BGO-BGI-0	2-3
BIAS-17	2-3	BGO-BGI-1	2-3
BIAS-18	2-3	BGO-BGI-2	2-3
BIAS-19	2-3	BGO-BGI-3	1-2, 3-4
BIAS-20	2-3	BGO-BGI-BA	OPEN
BIAS-21	2-3	BR-0	OPEN
BIAS-22	2-3	BR-1	OPEN
BIAS-23	2-3	BR-2	OPEN
BIAS-24	2-3	BR-3	CLOSED
BIAS-25	2-3	SYS-1	OPEN(Octane) Closed(Indigo)
BIAS-26	2-3	SYS-2	OPEN
BIAS-27	2-3	SYS-3	CLOSED
BIAS-28	2-3	SYS-4	OPEN
BIAS-29	2-3	SYS-5	CLOSED
BIAS-30	2-3	SYS-6	OPEN
BIAS-31	2-3	SYS-7	OPEN
T-INT	2-PT	R-INT	2/2-3/2
I/O-HI-8	OPEN	I/O-LO-8	CLOSED
I/O-HI-9	CLOSED	I/O-LO-9	CLOSED
I/O-HI-10	CLOSED	I/O-LO-10	CLOSED
I/O-HI-11	CLOSED	I/O-LO-11	CLOSED
I/O-HI-12	CLOSED	I/O-LO-12	CLOSED
I/O-HI-13	OPEN	I/O-LO-13	OPEN
I/O-HI-14	CLOSED	I/O-LO-14	CLOSED
I/O-HI-15	CLOSED	I/O-LO-15	CLOSED
DUAL-PORT HI-15	CLOSED	DUAL-PORT LO-15	CLOSED
DUAL-PORT HI-16	CLOSED	DUAL-PORT LO-16	CLOSED
DUAL-PORT HI-17	CLOSED	DUAL-PORT HI-17	CLOSED
DUAL-PORT HI-18	CLOSED	DUAL-PORT LO-18	CLOSED
DUAL-PORT HI-19	CLOSED	DUAL-PORT LO-19	CLOSED
DUAL-PORT HI-20	CLOSED	DUAL-PORT LO-20	CLOSED
DUAL-PORT HI-21	CLOSED	DUAL-PORT LO-21	CLOSED
DUAL-PORT HI-22	CLOSED	DUAL-PORT LO-22	CLOSED
DUAL-PORT HI-23	CLOSED	DUAL-PORT LO-23	CLOSED
DUAL-PORT HI-24	CLOSED	DUAL-PORT LO-24	CLOSED

TABLE 1 (CONTINUED)
JUMPER INFORMATION

Jumper	Position	Jumper	Position
DUAL-PORT HI-25	CLOSED	DUAL-PORT LO-25	CLOSED
DUAL-PORT HI-26	CLOSED	DUAL-PORT LO-26	CLOSED
DUAL-PORT HI-27	CLOSED	DUAL-PORT LO-27	CLOSED
DUAL-PORT HI-28	CLOSED	DUAL-PORT LO-28	CLOSED
DUAL-PORT HI-29	CLOSED	DUAL-PORT LO-29	CLOSED
DUAL-PORT HI-30	CLOSED	DUAL-PORT LO-30	CLOSED
DUAL-PORT HI-31	CLOSED	DUAL-PORT LO-31	OPEN
REM-RAM HI-15	CLOSED	REM-RAM LO-15	CLOSED
REM-RAM HI-16	CLOSED	REM-RAM LO-16	CLOSED
REM-RAM HI-17	CLOSED	REM-RAM LO-17	CLOSED
REM-RAM HI-18	CLOSED	REM-RAM LO-18	CLOSED
REM-RAM HI-19	CLOSED	REM-RAM LO-19	CLOSED
REM-RAM HI-20	CLOSED	REM-RAM LO-20	CLOSED
REM-RAM HI-21	CLOSED	REM-RAM LO-21	CLOSED
REM-RAM HI-22	CLOSED	REM-RAM LO-22	CLOSED
REM-RAM HI-23	CLOSED	REM-RAM LO-23	CLOSED
REM-RAM HI-24	CLOSED	REM-RAM LO-24	CLOSED
REM-RAM HI-25	CLOSED	REM-RAM LO-25	CLOSED
REM-RAM HI-26	CLOSED	REM-RAM LO-26	CLOSED
REM-RAM HI-27	CLOSED	REM-RAM LO-27	CLOSED
REM-RAM HI-28	CLOSED	REM-RAM LO-28	CLOSED
REM-RAM HI-29	CLOSED	REM-RAM LO-29	CLOSED
REM-RAM HI-30	CLOSED	REM-RAM LO-30	CLOSED
REM-RAM HI-31	CLOSED	REM-RAM LO-31	OPEN

TABLE 2
JUMPER INFORMATION (2ND BIT 3 BOARD) - ADWS SYSTEMS ONLY

Jumper	Position	Jumper	Position
BIAS-16	2-3	BGO-BGI-0	2-3
BIAS-17	2-3	BGO-BGI-1	2-3
BIAS-18	2-3	BGO-BGI-2	2-3
BIAS-19	2-3	BGO-BGI-3	1-2, 3-4
BIAS-20	2-3	BGO-BGI-BA	OPEN
BIAS-21	2-3	BR-0	OPEN
BIAS-22	2-3	BR-1	OPEN
BIAS-23	2-3	BR-2	OPEN
BIAS-24	2-3	BR-3	CLOSED
BIAS-25	2-3	SYS-1	OPEN(Octane) Closed(Indigo)
BIAS-26	2-3	SYS-2	OPEN
BIAS-27	2-3	SYS-3	OPEN
BIAS-28	2-3	SYS-4	OPEN
BIAS-29	2-3	SYS-5	OPEN
BIAS-30	2-3	SYS-6	OPEN
BIAS-31	2-3	SYS-7	CLOSED
T-INT	2-PT	R-INT	2/2-3/2
I/O-HI-8	OPEN	I/O-LO-8	CLOSED
I/O-HI-9	CLOSED	I/O-LO-9	CLOSED
I/O-HI-10	CLOSED	I/O-LO-10	CLOSED
I/O-HI-11	CLOSED	I/O-LO-11	CLOSED
I/O-HI-12	CLOSED	I/O-LO-12	CLOSED
I/O-HI-13	CLOSED	I/O-LO-13	CLOSED
I/O-HI-14	OPEN	I/O-LO-14	OPEN
I/O-HI-15	CLOSED	I/O-LO-15	CLOSED
DUAL-PORT HI-15	CLOSED	DUAL-PORT LO-15	CLOSED
DUAL-PORT HI-16	CLOSED	DUAL-PORT LO-16	CLOSED
DUAL-PORT HI-17	CLOSED	DUAL-PORT HI-17	CLOSED
DUAL-PORT HI-18	CLOSED	DUAL-PORT LO-18	CLOSED
DUAL-PORT HI-19	CLOSED	DUAL-PORT LO-19	CLOSED
DUAL-PORT HI-20	CLOSED	DUAL-PORT LO-20	CLOSED
DUAL-PORT HI-21	CLOSED	DUAL-PORT LO-21	CLOSED
DUAL-PORT HI-22	CLOSED	DUAL-PORT LO-22	CLOSED
DUAL-PORT HI-23	CLOSED	DUAL-PORT LO-23	CLOSED
DUAL-PORT HI-24	CLOSED	DUAL-PORT LO-24	CLOSED
DUAL-PORT HI-25	CLOSED	DUAL-PORT LO-25	CLOSED
DUAL-PORT HI-26	CLOSED	DUAL-PORT LO-26	CLOSED
DUAL-PORT HI-27	CLOSED	DUAL-PORT LO-27	CLOSED
DUAL-PORT HI-28	CLOSED	DUAL-PORT LO-28	CLOSED
DUAL-PORT HI-29	CLOSED	DUAL-PORT LO-29	CLOSED
DUAL-PORT HI-30	CLOSED	DUAL-PORT LO-30	CLOSED
DUAL-PORT HI-31	CLOSED	DUAL-PORT LO-31	OPEN
REM-RAM HI-15	CLOSED	REM-RAM LO-15	CLOSED
REM-RAM HI-16	CLOSED	REM-RAM LO-16	CLOSED

TABLE 2 (CONTINUED)
JUMPER INFORMATION (2ND BIT 3 BOARD) - ADWS SYSTEMS ONLY

Jumper	Position	Jumper	Position
REM-RAM HI-17	CLOSED	REM-RAM LO-17	CLOSED
REM-RAM HI-18	CLOSED	REM-RAM LO-18	CLOSED
REM-RAM HI-19	CLOSED	REM-RAM LO-19	CLOSED
REM-RAM HI-20	CLOSED	REM-RAM LO-20	CLOSED
REM-RAM HI-21	CLOSED	REM-RAM LO-21	CLOSED
REM-RAM HI-22	CLOSED	REM-RAM LO-22	CLOSED
REM-RAM HI-23	CLOSED	REM-RAM LO-23	CLOSED
REM-RAM HI-24	CLOSED	REM-RAM LO-24	CLOSED
REM-RAM HI-25	CLOSED	REM-RAM LO-25	CLOSED
REM-RAM HI-26	CLOSED	REM-RAM LO-26	CLOSED
REM-RAM HI-27	CLOSED	REM-RAM LO-27	CLOSED
REM-RAM HI-28	CLOSED	REM-RAM LO-28	CLOSED
REM-RAM HI-29	CLOSED	REM-RAM LO-29	CLOSED
REM-RAM HI-30	CLOSED	REM-RAM LO-30	CLOSED
REM-RAM HI-31	CLOSED	REM-RAM LO-31	OPEN


See Table 3 for LED Information.

TABLE 3
LED INFORMATION

LED	Color
DS	Green
DS	Green
DS	Green

3- INSTALLATION OF REPLACEMENT BOARD

1. Install VME I/F Board into Chassis and tighten the two front panel screws.
2. Turn on the main circuit breaker, CB 1 (see Illustration L4601A).

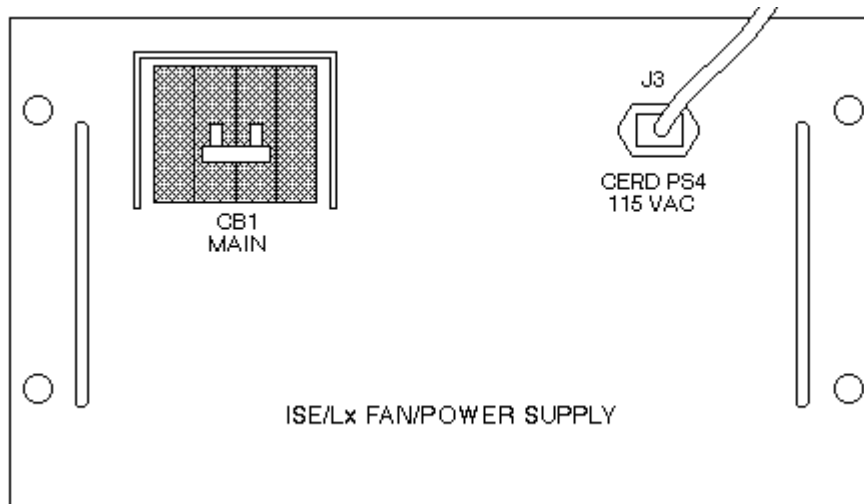

ISE FAN/POWER ASSEMBLY - FRONT VIEW
ILLUSTRATION L4601A

3. Install System Cabinet front cover.
4. Make sure Signa software is not running, and cycle power on the Operator Workspace.

Note

It has been found that all the parts in the Bit3 chain need to be power cycled upon replacement of any part.

4- FUNCTIONAL CHECKS REQUIRED

1. Perform one head or body scan.

REVISION HISTORY

REV	DATE	AUTHOR	PRIMARY REASONS FOR CHANGE
0	7/17/96	B. Schmidt	Initial Version
1	11/7/97	K. L-P	Updated jumper positions per SPR MRlge42734. Changed to word Doc.
2	6/25/98	K.L-P	Updated Bit3 jumpers for Cardiac and "fixed" bit 15 for normal bit3
3	2/9/99	R Hawthorne	Updated Jumper Positions per SPR MRlge49558
4	3/4/00	R. Kaufman	Added cycling power per SPR MRlge45379